THE MICHIGAN ALUMNUS.
UNIV. OF MICH.
OCT 9 1903

SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1903, by Munn & Co.]

Vol. LXXXVIII.—No. 8. [ESTABLISHED 1845.] NEW YORK, FEBRUARY 21, 1903. [8 CENTS A COPY $3.00 A YEAR.

Displacement, 11,800 tons. **Speed,** 19 knots. **Coal Capacity,** 2,000 tons. **Armor:** Belt and sides, 7 inches; gun positions, 10 inches. **Battery:** Four 10-inch; fourteen 7.5-inch; fourteen 3-inch. **Torpedo Tubes,** submerged, 3. **Complement,** 700.

CHILIAN BATTLESHIP "LIBERTAD;" LAUNCHED TEN MONTHS AFTER LAYING OF KEELPLATES.—[See page 133.]

SCIENTIFIC AMERICAN
ESTABLISHED 1845

MUNN & CO., - - Editors and Proprietors

Published Weekly at
No. 361 Broadway, New York

TERMS TO SUBSCRIBERS

One copy, one year for the United States, Canada, or Mexico $3.00
One copy, one year, to any foreign country, postage prepaid. £0 16s. 5d. 4.00

THE SCIENTIFIC AMERICAN PUBLICATIONS.

Scientific American (Established 1845) ..... $3.00 a year
Scientific American Supplement (Established 1876) ..... 5.00 "
Scientific American Building Monthly (Established 1885) ..... 2.50 "
Scientific American Export Edition (Established 1878) ..... 3.00 "

The combined subscription rates and rates to foreign countries will be furnished upon application.
Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, FEBRUARY 21, 1903.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are *sharp*, the articles *short*, and the facts *authentic*, the contributions will receive special attention. Accepted articles will be paid for at regular space rates.

AN 18-000-TON BATTLESHIP.

Despite the storm of criticism with which it has been assailed, the large-displacement battleship continues to grow both in size and in favor. Proof of this is to be found in the huge 18,000-ton ships which are to form the most important feature of the new building programme of the British navy. In 1882, six battleships were included in the British naval construction estimates, each of 10,600 tons. In 1892, the displacement had risen to 14,150 tons, which was the size of the "Royal Sovereign" class. Then followed the "Majestic" class of 14,000 tons; the "Formidable" class of 15,000 tons, and the "King Edward" class of 16,350 tons; while to-day the designs for 18,000-ton battleships will soon be in the builders' hands. The policy of building battleships of large size is favored in our own navy, the "Connecticut" and "Louisiana" having a displacement of 16,000 tons.

In other respects than that of size, there is a tendency on the part of American and British designers to reach a common type, with certain clearly-marked characteristics. This is particularly noticeable in a comparison of the new 18,000-ton ships with our own 16,000-ton vessels; for it must be confessed that in these last ships the British designers have shown a desire to follow our lead in the make-up and disposition of the armament, as will be seen from the following description:

The main armament of the new ships will consist of four 12-inch guns, located in two barbette turrets, forward and aft, and eight 9.2-inch guns, mounted in four barbette turrets, one at each corner of a central citadel, within which will be carried ten 6-inch rapid-fire guns. This armament will be more powerful than that of the "King Edward" class by four 9.2-inch guns. As compared with the "Connecticut," it will be seen that the armament will be about the same in power; for while the eight 9.2-inch guns constitute a much more powerful battery than the eight 8-inch guns of the "Connecticut," this preponderance is largely offset by the fact that the "Connecticut" carries twelve 7-inch guns as against the ten 6-inch guns of the British vessel. The 8-inch gun is very popular with the officers of our navy, and it is amply sufficient for the attack of armor covering the secondary batteries of the latest foreign vessels. On the other hand, the 9.2-inch is a much more powerful piece; it throws a 380-pound projectile with a muzzle velocity of 2,900 feet per second, and a muzzle energy of 22,160 foot-tons. Our new naval 8-inch piece of 45 calibers throws a 250-pound shell with a velocity of 2,800 feet per second, and an energy at the muzzle of 13,602 foot-tons. The lower power of our piece would be compensated for somewhat by the greater rapidity with which it can be handled; on the other hand, the 9.2-inch gun can pierce any waterline armor afloat at ordinary fighting range. The total muzzle energy of a single round from the main batteries would be 409,552 foot-tons for the "Connecticut" and 417,680 tons for the 18,000-ton ships.

It is chiefly to the increase of its defensive qualities that the extra 2,000 tons displacement of the British ship has been devoted, the protection being of quite an exceptional nature. In addition to the protection of 9 inches of Krupp steel from stem to stern at the waterline, this 9-inch armor covers the whole side of the vessel to the upper deck, giving the equivalent of waterline protection to the whole of the 6-inch battery, the bases of the 9.2-inch and 12-inch gun barbettes, and to the ammunition hoists and the bases of the smokestacks. The whole of the personnel will therefore fight the ship from behind not less than 9 inches of Krupp steel. The speed of these huge vessels is to be 19 knots, and they will each cost $7,000,000 to build and equip.

THE NEW COKE INDUSTRY.

In the past quarter of a century coke has become one of the most important factors in our iron and steel manufacturing interests, and its value for other purposes where a smokeless fire is required has appreciably increased with its extended use. As a statistical factor it was of little more importance than charcoal prior to 1880; but in 1901 nearly 20,000,000 tons of coke were produced in this country. The present demand is even greater, and the production and consumption for the current statistical year will probably exceed anything heretofore noted in our industrial history.

The coke furnaces of the country have an estimated capacity of production for the current year of 25,000,000 tons, and if this sells at the average rate of $2.50 per ton, as it did in 1902, the total output will represent $62,500,000. But coke, like coal, has increased rapidly in value in the past few months, and to-day it is hard to get it at $3 and $4 per ton for furnace coke, and $5 to $12 for foundry coke. These abnormal prices, however, are not likely to continue long. The chief difficulty in the coke industry has been the shortage of railroad cars to move the material to the furnaces for manufacturing, and then delivering the finished product to the consumers. So greatly handicapped have the coke furnaces been in this respect, that nearly half a million tons of coke are held up in the yards for lack of transportation facilities.

Poor transportation facilities affect the coke makers more than almost any other class of manufacturers, for besides requiring cars to carry the finished product to the consumer, the raw materials must be brought to the furnaces over the same lines of traffic. The hauling of coke to the iron and steel mills must necessarily determine to a large extent the cost of smelting. This has in the past year been out of all proportion to the actual conditions which prevail in normal times.

The future requirements of coke can be partly measured by the unparalleled development of our iron and steel trade. It takes on an average about one ton of coke to make each ton of pig iron. In the last statistical year—that of 1901—the total pig-iron product of the country was 15,878,354 long tons. Not all of this, however, was smelted with coke. Some of it was made with anthracite coal, charcoal, bituminous coal, and charcoal and coke mixtures. But the excess of coke produced over pig iron represents to a large extent the actual demand for coke in other lines of work. The conditions of the iron and steel industries in this country at the beginning of the year were never so promising, with the exception of the high cost of coal and coke. While the maximum capacity of the pig-iron plants of the country for 1902 was about 350,000 tons per week, that of 1903 will be much greater, owing to the completion of some twenty-five new blast furnaces, with an estimated capacity of 2,500,000 tons of pig iron a year.

The demand for coke by the blast furnaces for the current year will consequently be much in excess of that of any other year, and to meet this consumption coke makers have made extraordinary additions to their plants. Up to the first of 1901 there were 64,000 coke ovens in this country, with a trifle over 5,000 in the course of construction. During 1902 about 15,000 new bee-hive coke ovens were built, and several thousand more planned for 1903. These new ovens averaged 600 tons each per annum, which would increase the output of coke some 9,000,000 tons.

The by-product coke ovens have in the past few years become important factors in the situation. These ovens are peculiarly arranged and built to use coals that are not suitable for the bee-hive oven. They have been designed recently so that they can coke coals which were formerly considered of no value for this purpose. In 1901 there were 1,165 of these by-product coke ovens, with a total capacity of nearly 1,180,000 tons; but in 1903 there will be some 3,500 of the by-product ovens in operation. This will enable the makers to nearly double their output. The by-product coke output is immeasurably smaller in this country than in any of the coke-making countries of Europe, the percentage being about 5 per cent here against 40 per cent in Germany, and 20 per cent in England. This is due to the fact that the quality of the coals found in this country is relatively higher than in Europe, and the need of such ovens has not been so urgent here. It is also due largely to the fact that the question of economy in fuel has always been studied more carefully in Europe than in the United States.

Coke has found entirely new fields of use in the electrical field in recent years. In the many electrochemical industries established by the harnessing of Niagara, coke is employed for building the electrical furnaces, and for fusing with the different materials in the furnaces. In the manufacture of carborundum coke forms an important part of the mixture, and it is also used for packing the walls of the furnace. The very highest grade of coke is demanded for these electrochemical industries, and some coke ovens make a specialty of supplying products just for them. These industries include the manufacture of such commercial articles as caustic soda, sodium, aluminium, artificial graphite, zinc, and manganese. The demand for the finest coke for these practically new industries is increasing so rapidly that a number of coke ovens have been established near the scene of manufacturing.

The development of the gas engine in the past year has its bearing on the coke industry. The modern blast furnace gas engine is a marvel of modern invention and ingenuity. It takes the gas from the furnaces and utilizes it for generating power for different purposes. This gas used in the modern gas engine performs nearly or quite double the work obtained from it when used for steam heating purposes. In time the gas engine in utilizing the blast furnace gases will make the profits of pig iron production more than doubly profitable. Indeed, it is believed by some that the blast furnaces may in time be erected primarily as great gas generators, and only secondarily for making pig iron

PROPOSED REPAIRS TO THE EAST RIVER BRIDGE CABLES.

The report of the Board of Engineers appointed last November to decide what repairs should be made to the cables of the Williamsburg Bridge, which were damaged by fire, has found that the annealing of the wires by the heat of the fire left one of the cables, known as cable A, 2.5 per cent weaker than it was before the fire, while cable B was weakened by 6.5 per cent of its original strength. They suggest a method of repairs or reinforcement which will restore cable A, so that it will be only one-quarter of 1 per cent weaker than it was before the fire, while cable B will only lose 2 per cent of its original strength.

Each cable contains thirty-seven strands, and each strand is made up of 208 wires, making a total of 7,696 wires in each cable. The specifications called for an ultimate strength of 200,000 pounds or more to the square inch, but this strength actually ran much higher, being from 8 to 10 per cent greater than the specifications called for, the ultimate strength being from 216,000 to 220,000 pounds to the square inch. The result of the heating of the wires was to anneal and also to lengthen them, the heated wires, after the fire was over, being more or less bowed out from their proper position and not lying parallel with the mass of the cable. The annealing resulting from the fire reduced the strength so greatly, that, in extreme cases, the strength amounted to only 80,000 pounds to the square inch, which was about the ultimate strength at which the wires are drawn in the mill. The heat annealed the wire more or less completely for a depth of four layers. Thus specimens cut from the outer layers showed that, while the uninjured wire had a strength of 223,800 pounds to the square inch, the most injured portions of the burnt wires showed a breaking strength of only 89,900 pounds to the square inch. The reduction of strength decreased in the second, third, and fourth layers, where it fell from 234,000 pounds to the square inch to 210,500 pounds to the square inch, which, by the way, is 10,500 pounds per square inch greater than the specifications called for. A count made of the injured wires shows that 500 have been affected in cable B and 200 in cable A. The injured wires on the top of the cables where they pass over the saddles will be cut out and replaced by new wires, which will be spliced by sleeve nuts to the uninjured ends.

As the injury has taken place at the bend of the cables over the saddles, where the strength should be the greatest, it has been decided, after the wires have been spliced, to add 25 additional wires to cable A, and 200 additional wires to cable B. As the ends of these wires cannot connect with any of the wires in the cables, these being spliced to their own new sections that will be put in, it has been decided to attach these additional wires to the cables by friction. A series of steel bands will be clamped around the cables, at varying distances from the saddle, to the adjoining suspenders on either side, and a certain number of additional wires will be attached to each clamp. There will be three bands on each side of the saddle on cable A and eleven on cable B. Thus twenty wires will run to the outermost band furthest from the saddle and adjoining the first suspender; then twenty wires will be attached to the next band; twenty to the next, etc. On cable B the first band will cover 200 wires, none of which will be fastened to it; the second band will cover 180 wires, twenty of which will be fastened to it, etc. Furthermore, it has been recommended that fireproof flooring be used throughout the whole length of the bridge. It is gratifying to learn that the injury to the cables of this magnificent structure is such that it can be entirely repaired, the bridge as repaired being indeed, because of the high quality of the steel, stronger in its cables than was called for by the contract.

A HARVARD GRANT FROM THE CARNEGIE INSTITUTION.

A grant has recently been made by the Carnegie Institution, for the study of the collection of photographs at the Harvard College Observatory. For many years, two photographic doublets of similar form have been in constant use, photographing the sky night after night. The aperture of each is eight inches, and the

focal length about four feet. The first of these photographs was obtained with the Bache telescope in 1885, and since 1889 this instrument has been mounted in Peru, first near Chosica and later at the Arequipa Station of this Observatory, and employed mainly in the study of the southern stars. The 8-inch Draper telescope has, in the same way, been mounted in Cambridge, and used on the northern stars since 1889. About 30,000 eight by ten-inch photographs, each covering a region ten degrees square, have been obtained with each of these telescopes. Photographic charts have been made with these instruments, covering the entire sky on from one hundred to two hundred nights, and showing all stars brighter than about the twelfth magnitude, besides many that are fainter. During the last four years, this work has been supplemented by taking photographs with two anastigmat lenses having clear apertures of about one inch. Each photograph covers a region 30 degrees square, and in general shows stars of the eleventh magnitude and brighter. The number of times the entire sky is covered has thus been greatly increased. The amount of material thus collected has required a special building for its accommodation, and the means of the Observatory have so far permitted but a small part of the astronomical facts contained on the photographs to be gathered. The Henry Draper Memorial has enabled the most important results to be derived from the numerous photographs of the spectra of the stars, and the past history of many of the objects discovered here to be studied. When any object of interest is discovered, the photographs permit its brightness and position to be determined on one hundred or more nights, during the last twelve years, and many important facts not recorded at any other observatory are thus determined. By the aid of the grant mentioned above, a corps of assistants will be organized, whose duty will be the study of the photographs as regards any objects of special interest.

THE STEAM TURBINE.

BY H. M. GLEASON, ASSISTANT NAVAL CONSTRUCTOR, U. S. N.

The steam turbine, although old in principle, is comparatively young in its application to commercial power generators. Since Watt's development of the reciprocating engine, all inventive energy has been employed to perfect a form of power generator which is wrong in principle. If Watt had achieved as great success with a primitive form of rotary engine or steam turbine as he did with the reciprocating engine, it is safe to say that to-day we should have a highly perfected form of steam turbine, and the reciprocating engine would have been looked upon as one of the many queer inventions of the past.

So great has been the inventive genius of the age, that to-day we have a very efficient reciprocating engine, as efficient, perhaps, as this kind of engine will permit of; but who, with any idea of mechanical simplicity, can go into the engine room of any modern steamer without wondering at the ingenious complexity represented there?

To be sure, any machine should be designed for the use intended, and in this way the reciprocating engine is especially adapted for use on certain machines using power exerted in a straight line. The great majority of machines, however, require circular motion, and here the reciprocating engine is handicapped. It may be said, then, that the chief aim in power generation is to develop it along the line of circular motion. For this purpose, leaving other considerations aside, the steam turbine is eminently fitted.

The advantages of the steam turbine over the reciprocating engine are, in general, as follows:

1. The effort of the steam is applied directly without any intervening mechanisms for conversion of motion. This avoids their attendant friction, their costly fitting, and probable lost motion.

2. There being no reciprocating parts, there is no inertia to overcome at the beginning of the stroke, with the necessary consumption of energy required to accelerate them.

3. The absence of reciprocating parts makes it possible to run the shaft at vastly higher speeds than are attainable in a reciprocating engine.

4. The turbine engine becomes very compact from the absence of converting mechanism, and it consequently occupies very little room.

5. The engine has no dead center, but will start from rest in any position.

6. The engine has either no valve gearing, or that which it has is of the simplest character.

7. The simplicity of the engine and absence of expensive mechanism make it cheap to build and, therefore, it should be cheap to buy.

8. Very little skill is required to run the engine, and fewer engines are needed, and there is a consequent saving in the cost of handling.

9. The absence of reciprocating rods and dead-centers results in a construction in which the pressure of condensed steam in the engine does no harm. Water does not stop the engine from turning, it cannot endanger the engine casing. The engine can be started, even if under water, by simply opening the valve which admits pressure to the turbine blades; it will start with solid water as in the case of the water turbine.

10. Its incased construction and the above peculiarity adapt it for outdoor service and places exposed to low temperatures. Weather does it practically no harm, and its protection from outside injury makes it particularly serviceable in mining and stone quarrying.

11. The turbine is easily controlled; it is stopped by simply turning off the steam by means of an ordinary valve, and started again by turning on the valve.

The above advantages apply to its use in general, but for the propulsion of ships it has especial advantages:

1. The absence of vibrations, which are so troublesome in reciprocating engines. The study of vibrations in a reciprocating engine has called forth many valuable and scientific papers by engineers who have made this subject a special study. The necessity of the balancing of engines in ships need not be commented upon, for who has not suffered from it, even on the largest and best designed of our present-day passenger steamers. The continual shaking which the hulls and fittings of ships are subjected to is one great cause of their frequent need of repairs, some, it is true, of minor consequence, but the loss of time incurred in making these seemingly minor repairs results in an appreciable decrease in the vessel's earning capacity. And, when balanced at one speed, it does not follow that the same condition will follow at other speeds; in fact, it generally does not follow. With the turbine engine, all this loss of time and inconvenience is avoided.

2. The use of the turbine engine effects a great saving in weight of machinery. The question of weights on a ship is a very important one, and where a saving can be made in the propulsive machinery, a consequent gain can be effected in cargo or passenger accommodation, in the case of a merchant vessel, or, in the case of a warship, a gain in guns, armor or coal. The weight of machinery per I. H. P. in the case of the "Turbinia" is 21.3 pounds, while in the best designed modern vessels the average weight per I. H. P. is about 150 pounds. These figures show what advantages the turbine has in this connection. Where the weight problem is so vital, as in the case of a battleship, the use of turbines would mean a great gain in offensive or defensive qualities.

3. The perfect balancing of the turbine engine does away with increased weight in construction of engine bedding and hull fittings, which are necessary to withstand continual vibrations and strains.

4. The increase in stability gained by the use of the turbine is greatly due to the low position of the center of gravity of the engine. This is a very important feature in the turbine, as it enables vessels to carry heavy weights on the upper decks without endangering the stability of the vessel. In the case of a warship this would allow heavy guns and armor to occupy a position of greater elevation than is admissible now; and, in the case of a merchant ship, would enable her to go to sea in a light condition in greater safety. The turbine situated well down in the ship's body would be protected from injury in action without the necessity of armor decks, beyond protection from falling projectiles.

5. The lives of the engine-room crew are not endangered by intricate, fast-moving parts. It is not necessary to call to mind the marine disasters that have been caused by the breaking of a shaft and the consequent racing of the engines, resulting in completely wrecking the engine room and not infrequently injuring the hull seriously. From all this the turbine is free.

6. A much smaller engine-room force is required, This results in a great saving in running expenses, and, in the case of a warship, would enable more men to be carried to man the guns.

7. Last, but not least, of all, the turbine requires very little lubrication, resulting in a great saving of lubricating oil, which in a large vessel is no small item.

The best-known turbines to-day are the Parsons-Westinghouse, the DeLaval, and the Dow. All these different classes of turbines are designed to derive the maximum effect of the kinetic energy of steam under expansion, and this requires that the turbine shaft revolve at a very high speed. This makes the turbine specially adaptable for electric generators, and its use in this connection is becoming general.

For marine propulsion, a high speed of revolution of the propellers is not desirable beyond a certain limit, at which cavitation results. Thus, in some cases, it is necessary to reduce the speed by gearing down. The propellers of the "Turbinia," at a speed of 34½ knots per hour, made 2,000 revolutions per minute. From the limited experience with high-speed propellers, it has been found that under certain conditions the ship does not answer to her helm in the usual way; but this difficulty can be overcome by putting the rudder forward of the propellers.

The question of efficiency is one to be considered. Comparing it with a compound or triple expansion condensing engine, the steam turbine over the widest range of loads is, for general purposes, the most desirable. This the steam turbine has done, as proven by trials, in which the efficiency from full load to half load varied but 8 per cent; this is a far better performance than any attained by reciprocating engines. With the improvements in design that are sure to be made, the turbine's efficiency will be demonstrated even to the most skeptical engineers.

The great problem in steam turbine design is to devise a perfectly reversible one. This is done in marine turbines at present by having a separate turbine on the same shaft—the reversing turbine running idly in a vacuum when the ahead turbine is working, and *vice versa*.

There is nothing that can stay the improvement and popularity of a machine or process which saves money; thus we can see for the steam turbine a great future, both in commercial power generation, and marine propulsion. The reciprocating engine, although very highly developed and universally used, has a dangerous rival in the simple turbine, and there is nothing that appeals to the American mechanic more than simplicity.

SCIENCE NOTES.

Profs. Haga and Wind, of Holland, in 1899 announced that the X-rays were subject to diffraction. They have recently repeated their experiments and have again proved the existence of diffraction phenomena, and conclude that there is no longer a doubt that the X-rays are, like light waves, perturbations of the equilibrium of the ether. They have sought to evaluate the wave-lengths of the X-radiations, and conclude that these radiations have wave-lengths of the same order of magnitude as light waves.

Most people are aware of the power of egg shells to resist external pressure on the ends, but not many would credit the results of tests recently made, which appear to be genuine. Eight ordinary hen's eggs were submitted to pressure applied externally all over the surface of the shell, and the breaking pressures varied between 400 pounds and 675 pounds per square inch. With the stresses applied internally to twelve eggs, these gave way at pressures varying between 32 pounds and 65 pounds per square inch. The pressure required to crush the eggs varied between 40 pounds and 75 pounds. The average thickness of the shells was 13-1000 inch.

The recommendations of the Advisory Board of the Carnegie Institution are of exceptional interest. Prof. S. P. Langley tells of the wide discrepancy of results obtained in an effort to determine the solar constant, the unit of heat exerted by the sun's rays on a given surface in a given time. He gives as the probable cause of the divergence, the absorptive qualities of different layers of atmosphere which absorb heat from the sun's rays. He also suggests a possible periodic variation in the power of the sun. In view of the important effect of the heat imparted by the sun's rays on all life, Prof. Langley advocates the establishment of two laboratories close to the equator, at the greatest possible difference of altitude and yet within sight of each other, so that, under like atmospheric and other conditions, simultaneous observations could be taken, and the variation produced by difference of altitude accurately recorded. Dr. D. S. Jordan advocates the sending of an expedition to study ichthyology in the Pacific Ocean and to make a marine biological survey similar to that being conducted by the United States Fish Commission in American waters. Prof. C. K. Gilbert, of Washington, proposes a deep boring in plutonic rock for the purpose of ascertaining the temperature gradients in the earth's crust. He recommends that a mass of great age be selected, one which has not for many periods been subjected to change, and that a boring be made with some instrument similar to the diamond drill, so that the core produced could be made the subject of special investigation. With such a boring completed to a great depth, temperature observations could be taken at numerous levels, which would contribute largely to geological knowledge, and might prove of great value in the study of seismic disturbance. Dr. Ladd, of Yale, recommends a certain line of work in his special department of psychology and philosophy. Of most importance he considers a bureau of information, a sort of psychological clearing house for the interchange of not only definite results, but of attempted investigations, partial results, etc., with a view to keeping all psychologists posted as to what is being done. Dr. C. O. Whitman, of the University of Chicago, recommends a biological farm for the study of heredity, variation, and evolution.

THE OZONE WATERWORKS AT WIESBADEN AND PADERBORN.

The city of Wiesbaden has for years been drawing its supply of drinking water from the Taunus springs, which yield excellent water. But the continued growth of the town has forced the municipal authorities to provide for some means of supply beyond the limited source of the Taunus springs, and with this end in view the surface water from wells sunk in the plane of the Rhine has been subjected to a special purification, which turns it from a water of inferior value, fit only for general economical purposes, into an excellent drinking water. The method of purification is a novel one, which has never before been applied on a technical scale. Instead of the water being filtered, as usual, it is treated with ozonized air prepared in ozonizers of the Siemens pattern. The whole plant has been put up by Siemens & Halske, of Berlin. Its maximum output is 66,000 gallons per hour, but normally only 33,000 gallons are consumed, so that there is a surplus of 100 per cent available.

THE OZONIZERS AT THE WIESBADEN PLANT.

Every part of the installation is duplicated, so that it can be worked in two absolutely independent halves, and moreover, if any particular part becomes unfit, the connections are so arranged that it can always be replaced by the corresponding duplicate part.

The equipment is as follows: A pair of engines drive a direct and an alternating current dynamo each, which in their turn furnish the power for the motors of the pumps and the current for the ozonizers, this current being transformed up to the requisite 8,000 volts by six step-up transformers (see figure). The building containing the plant is divided into three rooms: 1, the engine room; 2, the room for the ozonizers and transformers; and 3, the room for the sterilizing towers.

In the engine room are placed two 60 horse power Wolf's engines, two direct and two alternating current dynamos, two centrifugal pumps, and two fans to supply the air current for the ozonizers. The portion of the building containing the ozonizers is two stories high. On the ground floor it accommodates forty-eight ozonizers placed in two groups separated by a gangway (see figure). Each of these groups forms part of one of the two independent plants. It has twenty-four ozonizers arranged in four rows, one above the other, of which every eight are connected to one of the six transformers. Such a series of eight ozonizers furnishes the quantity of ozonized air required for one sterilizing tower. The ozonizers are of the Siemens type; the one pole consists of the cooling water of the glass tube, and is earthed, while the other pole, connected to the transformers, is placed in an inaccessible position and therefore causes no danger to the attendant. The ozonizing tubes are inclosed in a cast-iron case consisting of three parts: a completely closed central portion, into which are firmly screwed the eight ozone tubes; an upper part, functioning as reservoir and distributer of the air; and a lower part forming the ozone-collecting chamber. In the upper chamber, removed from all possible touch of the attendant, are fixed the terminals from the transformers. On the floor of the lower compartment are placed the high potential cylinders with their insulating glass rods, and in addition an automatic device to prevent a short circuit through any leakage of the cooling water. This consists simply of a strip of filter paper stretched across a metal spring. If the filter paper gets moist it tears, the spring opens out and automatically places the particular ozonizer out of work.

The cover, bottom, and front wall of cast-iron case are made of thick plate glass, so that the blue shimmer of the silent charge, a certain sign of the proper working of the apparatus, can be watched by the man in charge of the room, which is kept dark. Owing to the careful protection of the high potential terminal, the apparatus can be fearlessly and safely handled by the workmen. The air supply is fed by means of a main pipe running along the row of ozonizers and sending branches to them severally.

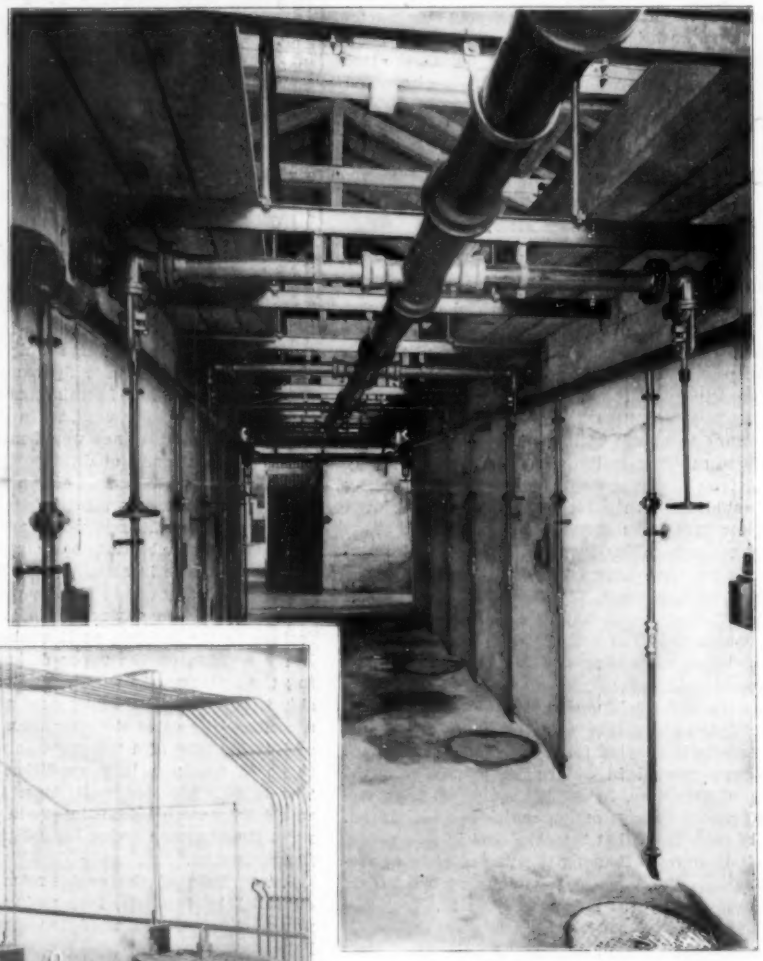

THE STERILIZING TOWERS.

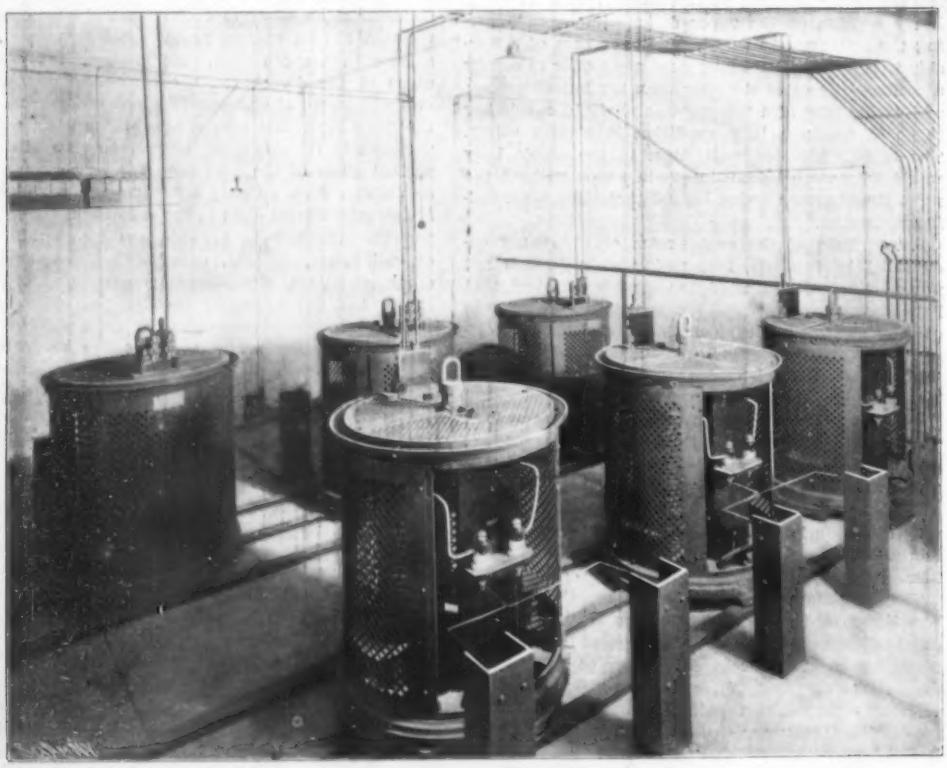

THE HIGH POTENTIAL TRANSFORMERS.

The brickwork sterilized towers are divided into four sections, and are placed in two rows, of which one forms the reserve plant. These towers receive from a common feed pipe the unpurified water above. They are about thirteen feet high, and are filled to a height of some six feet with coarse gravel. The water trickles in a fine stream down this gravel, meeting a slow current of ozonized air ascending under a slight excess of pressure. The feed pipe is provided with a conical valve which automatically stops the supply of water, if at any time any part of the ozonizers is out of order. The quantity of water passing down through each tower is 11,000 gallons per hour, and the volume of air passing up in the same time is 21,000 gallons. At the bottom of each tower there is a collecting tank for the sterilized water, from which the latter is pumped to the high-level reservoir.

Due provisions are made against accidents interfer-

ing with the working of any particular portion of the ozonizing plant. The disturbances which are liable to occur are two:

1. The current in the electrical apparatus may fail.

2. The current of air through the plant may fail.

In either case an automatic device leads to the closing of the valve through which water is admitted to the sterilizing towers, and at the same time a bell informs the attendant of the mishap. In this way the supply of unsterilized water to the consumers is effectually prevented by means of apparatus which is of the simplest construction and easily controlled.

Each half of the plant, yielding a supply of 33,000 gallons, expends 50 horse power, of which 27 go to the ozonizers and about 22 to the pumping plant, the remainder being used up for the air blast, for feeding the boiler, etc.

The cost of the plant figures out to one and one-third cents per 1,000 gallons of sterilized water, of which about one-third of a cent falls to the coal consumed in effecting the ozonization. (The price of one ton of coal yielding 7.7 times its weight of steam being reckoned at $5.) To this must be added about two-thirds of a cent in payment of interest and for keeping in repair. But it must be remarked that the Wiesbaden plant is not typical, as there were no pre-existing water works, and pumping has to be done, which does not properly form part of the work of an ozonizing plant.

Prof. Proskauer and Dr. Schüder, of the Koch Institute for Infectious Diseases at Berlin, have carefully investigated the efficiency of the ozone sterilizing process, with results which are highly satisfactory. They worked with water which was grossly infected with virulent bacilli (of the cholera and typhus kind). Their result only confirmed the conclusion previously arrived at in the preliminary experiments at Martinikenfelde by the same investigators, namely, that ozone, in the concentration in which it issues from the Siemens apparatus will destroy all pathogenic bacteria and nearly all harmless microbes, excepting just a few highly resistant and innocent forms, provided a suitable gravel filling is used in the sterilizing towers.

A month after the opening of the Wiesbaden water works, there was also inaugurated a similar plant, on a smaller scale, however, at Paderborn. The sterilizing apparatus of this is a precise copy of that at Wiesbaden, the only difference being that the water delivered from the sterilizing towers is allowed to flow down in a series of cascades, so as to work out the last traces of ozone.

The Paderborn waterworks have to supply 13,000 to 15,000 gallons of sterilized water daily. The plant has nine ozonizers of the Siemens type (of which three are for reserve) and two sterilizing towers with four sections each. The power for the electric plant is supplied from a gas engine. The former consists of direct and alternating current dynamos, two blowers and three transformers, and has arrangements preventing the supply of unsterilized water similar to those at Wiesbaden. The cost of power is a little higher at Paderborn, but on the other hand there is less ozone used per gallon of water, so that the total expenses are much the same as at Wiesbaden.

The establishment of the plants at Wiesbaden and Paderborn marks the début from the laboratory into the technical world of a process which is likely to prove a serious rival to older methods of purifying drinking waters, which have been in vogue hitherto.

THE NEW CHILIAN BATTLESHIP "LIBERTAD."

The striking illustration on our front page is reproduced from a photograph taken from the launching ways, just as the new Chilian battleship "Libertad" had taken the water. The heavy chains which are seen hanging from the sides of the ship were dropped to assist by their friction upon the bottom in checking the vessel's way through the water, while a part of her launching cradle will be noticed still in position under her starboard bow. We have seen many handsome photographs of a launch, but never one that approached this in dramatic interest.

The "Libertad" was launched on January 6 at the yards of Messrs. Vickers, Sons & Maxim, Barrow-in-Furness, England. She is a sister ship to the "Constitucion," which was recently launched for the Chilian government by Armstrong, Whitworth & Co. from the Elswick shipyard, Newcastle.

It is claimed for the "Libertad," and we think with much show of truth, that she is, for her size—11,800 tons—the most powerful fighting ship afloat. The European-built Chilian vessels, probably because they have come chiefly from the Armstrong yards, are all remarkable for their powerful offensive qualities, the armament of these vessels being, in proportion to their displacement, more powerful than that of any ships in the world; unless indeed we make an exception in the case of the United States navy.

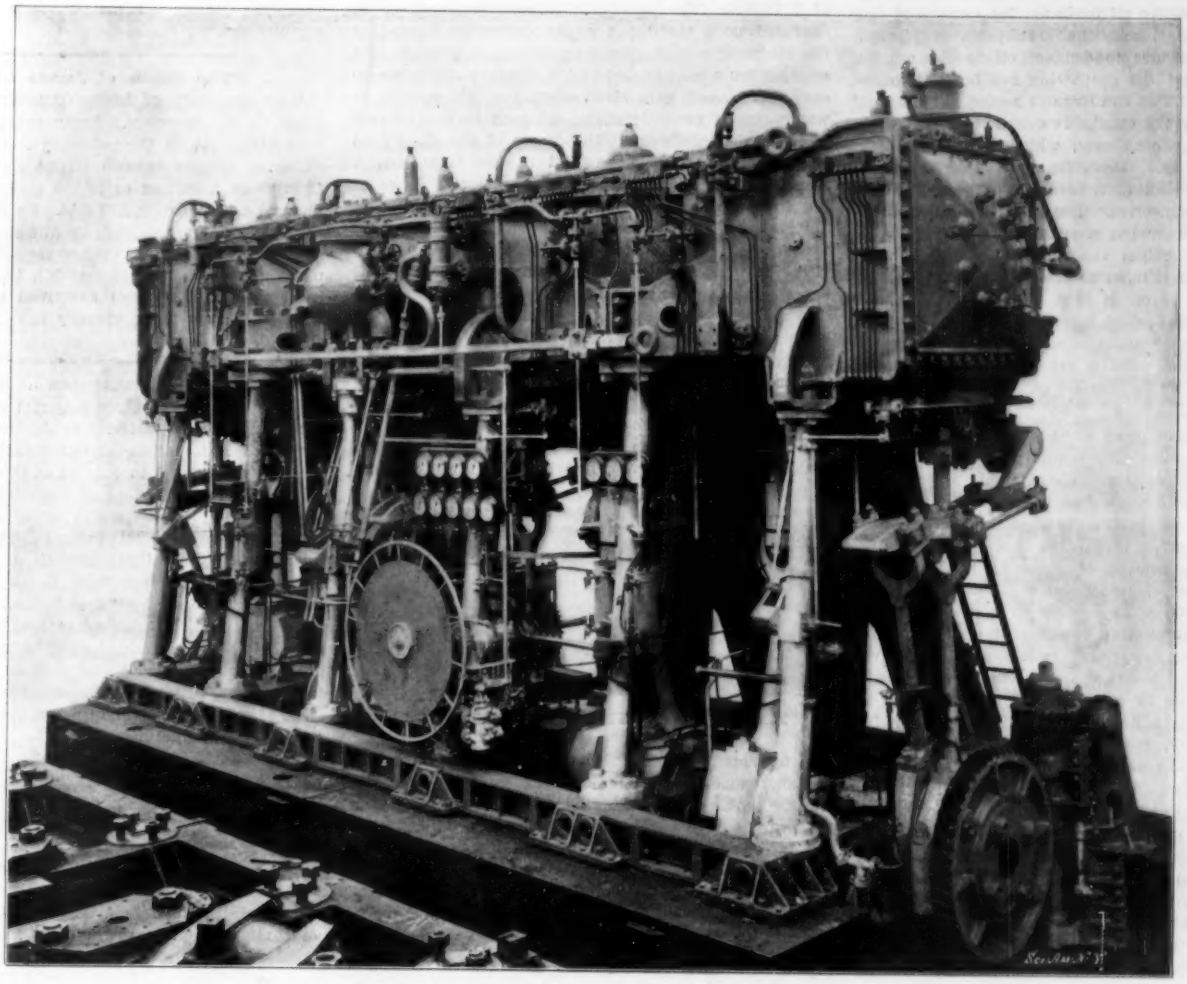

THE QUADRUPLE-EXPANSION ENGINES OF THE "LIBERTAD."

The "Libertad" is 436 feet long and 71 feet broad, and her mean draft is 24 feet 7½ inches. Her motive power consists of Yarrow boilers of the large-tube type, and twin-screw, triple-expansion engines of 12,500 horse power, and her estimated sea speed is 19 knots an hour. The normal coal capacity is 800 tons, but the full bunker capacity is 2,000 tons. The vessel will carry a complement of 700 officers and men.

The armament consists of four 10-inch breech-loading rifles with quick-action breech mechanism; fourteen 7.5-inch rapid-fire guns, fourteen 3-inch rapid-firers; four 6-pounders; four Maxims, and three submerged torpedo tubes; and from this heavy battery it is estimated that with all the guns firing at their maximum speed, this vessel could deliver in one minute 13½ tons of metal whose combined energy would amount to 1,700,000 foot-tons. In explanation of this great total, it is sufficient to mention that the guns are all of the modern, long-caliber, high-velocity type, with the latest pattern of breech mechanism designed to facilitate rapid loading. Thus, the 10-inch guns will fire a 500-pound shell with a muzzle velocity of 2,859 feet per second and a muzzle energy of 28,160 foot-tons. At the muzzle these guns will be capable of penetrating 31 inches of steel armor. The 7.5-inch gun of the broadside battery is a 50-caliber piece, which fires a 200-pound shell with a muzzle velocity of 3,018 feet per second, and a muzzle energy of 12,638 foot-tons. This piece, which can fire eight rounds per minute and has, therefore, about equal rapidity of fire with the 6-inch piece, can penetrate at the muzzle nearly the same thickness of steel plate as the 10-inch gun, or 29.4 inches. The adoption of such a heavy gun for the secondary battery is in accordance with the best modern practice, which recognizes that the 6-inch piece is not sufficiently powerful to penetrate the modern Krupp armor with which the secondary batteries of modern warships are protected. This 7.5-inch gun, however, is capable of effecting penetration at ordinary battle ranges, and therefore marks a great advance on the secondary batteries carried by most existing warships and cruisers.

While the defensive features of the "Libertad" are, perhaps, not quite equal to her tremendous powers of offense, they are fully up to the average of the latest ships. She carries a practically complete belt at the water line which has a maximum thickness of 7 inches amidships and is associated with athwartship screen bulkheads 10 inches in thickness. This belt is 8 feet in depth. Side armor of the same thickness extends to the upper deck over the whole side of the ship lying between the two main barbettes, and by its association with transverse bulkheads of 6-inch armor, it forms a complete armored central citadel. The upper deck is formed of 1-inch steel plating, while the protective deck, which is 1½ inches in thickness within the citadel and 3 inches in thickness at the ends outside the citadel, extends completely from stem to stern at the level of the top of the waterline belt. The barbettes for the 10-inch guns are 10 inches in thickness in the front where they project beyond the central citadel armor and 8 inches in the rear. The 7.5-inch guns are carried, four of them in casemates on the upper deck at the four corners of the central citadel, and the other ten are within the citadel on the gun deck, five on either side. This battery of ten guns is further protected by 1-inch screens of steel plating placed transversely between each pair of guns. These two battleships will be considerably the most powerful war vessels in the Chilian fleet, which possesses some of the most notable armored cruisers in existence.

Not the least remarkable feature about the "Libertad" is the great speed at which she has been built. The first keel plate was laid March 13, 1902, and the launch took place on January 6, 1903, the vessel being therefore, completed in the remarkably short space of ten months. We commend this record to the consideration of our private shipbuilding firms, who are largely responsible for the backward condition of our navy. The contract for the construction of the "Missouri" (which is a vessel only 400 tons larger than the "Libertad") was signed December 30, 1898. Last December, after the expiration of four years, the vessel was no less than twenty months behind contract, and she is not yet completed.

Automobile News.

Now that automobiles have shown their capabilities on the road for transporting suburban sight-seeing parties, as shown by the Paris-Versailles touring buses and the New York-Tarrytown Mobile wagonettes that were run daily last summer, automobile cars are soon to be introduced on French and English railway lines for fast speeding over long distances and for taking care of suburban traffic respectively. In France, the Serpollet steam motor and flash boiler is to be used to propel single cars rapidly over long distances, while in England the Napier gasoline motor, of a type similar to that on the car that won the Gordon-Bennett race last year, is to be used on individual cars over a 30-mile stretch of track. The service required in this section is not frequent enough to warrant the installation of an electric equipment, so gasoline motor cars are to be used, and these will reduce the running time over steam trains by about 20 per cent, owing to their being more easily and quickly accelerated. From present indications, it looks as if the automobile is destined to revolutionize not only road traffic, but traffic on rails as well.

One great improvement that the French manufacturers have made on their machines this year is the method of lubricating the motor. Instead of depending on splash lubrication alone for oiling every part of the engine, positive oil feeds are led to each of the crankshaft bearings, and the crankshaft is pierced with suitable passages to conduct oil to the cranks themselves, so that the connecting rod boxes also receive plenty of oil. In the Renault motor, the oil that is splashed up by the cranks is caught in small cups at the top of the crankcase, which feed the major bearings by gravity. Centrifugal force is depended upon to send this oil afterward through small holes to the cranks themselves. The new de Dion-Bouton double-cylinder motor has a small pump driven by a worm gear, that raises the oil to the top of the crankcase, whence it flows to the bearings by gravity. A sufficient bath of oil is kept in the crankcase all the time, to splash up and lubricate the pistons. The better oiling arrangements of the motor conduce to longer life and more efficient service, and they should be introduced as far as possible on American gasoline cars.

The legislatures of many of the different States are at present considering bills regulating the speed and operation of automobiles. Connecticut, which has had the most sensible law imposing a speed limit of fifteen miles an hour in the country and twelve miles in cities and towns, is threatened through the efforts to distinguish themselves of some of her would-be farmer legislators; Massachusetts is considering a bill requiring that all operators of autos shall be registered, and prohibiting the licensing of any car capable of traveling faster than twenty miles an hour; while it remains for Maine to try to bring anti-autoists back to their senses by considering a bill providing a speed limit of eight and twenty miles an hour in towns and country, respectively. In every instance, the automobile clubs are fighting the adverse legislation and attempting to forestall it with bills giving equal rights to autoists and the drivers of horses.

Four hundred dollars damages were awarded an automobilist of New Haven, Conn., recently because of injuries received by being thrown from his machine, which ran into a hole in the pavement between the trolley tracks 48x7x4 inches deep. The judge held that the city was primarily responsible for the condition of the pavement, but that it can exact settlement from the trolley company, as the latter, under the law, is responsible for the pavement between its tracks. This is one of the few cases where the autoist has come out victorious.

Another interesting decision has just been made by a judge in Bridgeport, Conn., which, while not affecting automobiles directly, throws some light on the right of way of trolley cars on country roads. A hack was being driven with two wheels in the track at 12:40 A. M. one dark, stormy night last winter. A car came along behind it and ran into it, throwing it down a small bank and turning it upside down. Neither the occupants nor the driver were seriously injured, but the driver was awarded $500 damages on the ground that the company was to blame in not providing a sufficiently powerful headlight for the motorman to see an object on the track in time to stop the car. The motorman testified that the gong was rung just before he saw the hack. In handing down his decision, Judge Wheeler said: "The company has no exclusive or paramount right to the use of the roadway between the tracks. It must operate its cars in the knowledge that the public has a right to use its tracks as a part of the highway. The traveler must recognize that the car cannot proceed save upon the track, and hence he must turn off from the track, when he knows the car is approaching, within reasonable time to allow it to pass. When a traveler enters upon a car track in advance of an approaching car, he must, in the exercise of reasonable care, do what he can to avoid accident, and ordinarily, if he turn upon the tracks so closely in advance of a car that an accident is inevitable or probable, such conduct will of itself be negligent. The traveler already upon the track is not obliged to keep looking around to see if a car be approaching. Such a duty on his part would be inconsistent with his right to the reasonable use to that part of the highway. When the traveler hears an approaching car, it is his duty to turn out. When he ought to hear it, not to turn out would be an important consideration in measuring his own freedom from negligence." Under the conditions given, however, that the driver did not hear it was no fault of his, and the company was to blame for not taking proper precautions toward the avoidance of accident.

THE SPONTANEOUS BENDING OF MARBLE.

One of our correspondents has sent us a photograph, which we have herewith reproduced, of a bent marble slab in Rock Creek Cemetery, Washington, D. C. The picture brings out a curious phenomenon which may be quite commonly observed in old graveyards. The slab in question has been in position over half a century, judging from the inscription, and during this time has sagged over three inches at the center. Its length is 70 inches, width 35 inches, and it has a thickness of 2 inches. The peculiar phenomenon is not to be confused with that of a slight concavity formed at the center of a slab placed in horizontal position and exposed for a long period to the weather. Such a concavity is caused by a slow solution of the marble in water caught on its surface, whereas in the present instance the thickness at the center of the stone does not vary materially from that at the sides, but a marked curvature is shown on both surfaces. In seeking for an explanation of this curvature, one is at first tempted to consider marble as a fluid, such as sealing wax or pitch, but possessed of much greater viscosity. Pitch in cold temperature is brittle and has all the appearance of a solid, but a heavier substance placed on the surface will, in time, sink to the bottom, and a lighter substance will very slowly float from the bottom of the pitch to the top. However, in the present instance, this explanation is not satisfactory.

For an authoritative opinion on the subject, we have submitted the question to the Director of the United States Geological Survey, and have been referred by

MARBLE SLAB BENT BY ITS OWN WEIGHT.

him to Vol. X. of the Tenth Census Reports, which contains some notes compiled by Alexis A. Julien, on similar occurrences in Europe, where the matter has been studied by some prominent geologists. One of the instances given is that of a slab in the marble veneer of the facade at St. Mark's, Venice, which at its lower end bulges 2¾ inches from the backing. The slab faces westward, and was found to become very warm in the afternoon sun, while its rear surface was kept cool by the backing. Another striking example may be found in the Alhambra in Granada, Spain. One of the two doorways that have been christened "La Mezquita" comprises three slabs of marble, one resting as a lintel on the other two, which are placed upright. A subsidence of the wall on the right side has exerted an enormous thrust upon one of the uprights, and the marble instead of breaking has simply bent outward about three inches. In the quarries near Rutland, Vt., the bending of thin slabs of marble supported only at the ends has frequently been observed. Fleurean de Bellevue discovered a dolomite possessed of this property, which he attributed to "a state of desiccation which has lessened the adherence of the molecules of the stone." De Bellevue seemingly confirmed this by experiments, which showed that inflexible varieties of marble, when heated, became flexible. However, owing to the exceedingly small quantity of water present in marble, this explanation is not satisfactory. A better solution of the problem has been furnished us by Geikie, who says that "irregular and closely contiguous grains of calcite which make up a white marble are united by no cement, and have apparently a feeble coherence." Prof. Julien's opinion is that "their contiguous crystallization has left them in a state of tension, on account of which the least force applied through pressure from without, or of the unsupported weight of the stone, or from external expansion by heat or frost, produces a separation of the interstitial planes in the minute rifts. Such a condition permits the play of the grains upon each other and considerable motion, as illustrated in the commonly observed sharp foldings of strata of granular limestones without fractures or faults. In such cases also I have observed that the mutual attrition of the grains has been sometimes sufficient to convert their angular, often rhomboidal, original contours into circular outlines, the interstices between the rounded grains being evidently filled up by much smaller fragments and rubbed-off particles."

Dr. Bedell's Double Electric Transmission.

In the current Supplement we publish a discussion by Dr. Frederick Bedell, of Cornell University, on the joint transmission of direct and alternating currents simultaneously over the same set of wires. The "common conductor system," of which he is the inventor, requires two pairs of wires, each pair constituting a complete circuit for direct current. By coupling the forwarding wire of one circuit to the return wire of the other, the two will serve as a path for an alternating current, while the remaining two wires may be coupled for another alternating current. The course of each alternating current will be first along the forwarding wire and then along a return wire, according to the alternating directions of its flow, the circuit being completed through the ground. Thus the currents will not interfere with each other and the fluctuations of an alternating current will not be felt in the direct current circuits sharing the same wires.

The Death of James Glaisher.

With the death of James Glaisher there has passed away an old aeronaut. Forty years ago his exploits kept him much in the public eye. In 1862 he made a series of famous balloon trips. Ascending with Mr. Coxwell in a balloon of 95,000 cubic feet capacity, he reached a height of 26,177 feet. On September 5, in an ascent at Wolverhampton, he and his companion were nearly frozen to death. After registering observations up to a height of 36,000 feet Mr. Glaisher became unconscious. Mr. Coxwell contrived to pull the valve string with his teeth, thereby causing the balloon to descend.

The Industrial Exhibition at Osaka in 1903.

Osaka, one of the three imperial cities of Japan, is the center of great activity at this time, preparing for the Fifth National Industrial Exhibition, to be held there from March 1 to July 31 of this year. The exhibition, which is situated at Imamiya in the southern part of Osaka, will surpass in magnitude and beauty all preceding ones, and will bring before the public eye a fuller, more general representation of Japanese arts, manufactures, and resources in their latest development than has ever been seen before. The exhibit will be under the direct management of the Imperial Commission which is presided over by His Imperial Highness, Prince Kan-in. There will be special buildings for classified groups of the exhibits, and important among them are those of forestry, fine arts, agriculture, fisheries, manufactures, education, zoology, foreign samples, transportation, greenhouse, cold storage, aquarium, and machinery. There will also be bazars, restaurants, tea-houses, and the Ceremonial Hall within the grounds. Visitors to the exhibition will be fortunate in witnessing the two great religious festivals which will be celebrated at that time. The festival of Tennoiji will gather over ten thousand priests to Osaka from all over Japan to parade through the streets in their ceremonial robes of rich brocades and brilliant colors. To those who attend the exhibition will be granted special privileges and free access to many places usually closed to all visitors, both foreign and Japanese.

Carnegie Institute's Grants to Johns Hopkins University.

The Carnegie Institute has made five grants of money to the members of Johns Hopkins faculty to assist original researches. They are as follows:

To Dr. Harmon N. Morse, Professor of Analytical Chemistry, $1,500 for an assistant in his researches upon the new method he has evolved for measurement of osmotic pressures.

To Prof. R. W. Wood, $1,000 to maintain a research assistant in his work. He has appointed Thomas Sidney Elston of the University of California to the position.

Dr. H. C. Jones, in new physical chemistry as it is studied in America, gets $1,000 for an assistant in his researches. Frederick Hutton Getman, of Stamford, Conn., receives the appointment. His doctoral dissertation deals with an important problem in physical chemistry.

Dr. J. J. Abel, Professor of Physiological Chemistry, $1,000, for the purchase of apparatus necessary to his researches in that subject. He is a leader in this branch of science in America.

Dr. J. B. Whitehead, in the physical department, has received a liberal grant to carry forward a research in the theory of a magnetic field developed by Maxwell, the English scientist.

Correspondence.

Some Suggestions in Civil Engineering.

To the Editor of the SCIENTIFIC AMERICAN:

The engineering projects outlined below may embody some patentable features, but the writer has decided to offer them to the public for what they are worth.

The first is a new method of constructing tunnels under deep harbors or straits, so as to avoid the heavy grades, and also reduce the cost; the second provides a means of retaining the high-water level in harbors, subjected to the action of heavy tides, and with large rivers flowing into them, as in the case of the harbor of this city (St. John, N. B.); the third is a more extended application of the latter scheme, so as to render rivers, with elevated banks, navigable without the aid of canals, where rapids and shallows must be passed; and the fourth shows how to use glaciers, easily accessible, like the Great Glacier on the C. P. Railway, for cold storage purposes. The last is very simple, and need not be described at length, as it would only be necessary to dig a tunnel into the glacier, and storage chambers on either side of it, with a branch track running into the tunnel, to convey the goods. British Columbia salmon and other products could be stored for any length of time, for convenient shipment to eastern markets. Other glaciers could, of course, also be used—possibly one could be found on the Labrador or Greenland shores, not far from trade routes.

The tunnel project involves the construction of a submarine embankment, preferably of clay mixed with rock ballast, to within about 30 feet of the surface of the water, which would allow a sufficient depth for shipping, and afterward excavating the tunnel through the embankment. The material removed for the approaches to the tunnel could be used for the embankment, the width or height of which could be increased, if necessary, by using the material excavated from its interior. In building railway embankments, it is found, that such material will force its way through enormous depths of boggy deposits, and it therefore seems probable that this could also be done in building these tunnel embankments, where a heavy layer of silt is encountered, as on the bottom of the harbor of New York.

The avoidance of blasting operations would greatly reduce the cost of construction, the moderate character of which is shown by the fact that thousands of acres of real estate have been built out into the harbors of San Francisco and Boston. The work would be of precisely the same nature, where the embankments are built above the surface of the water for a short distance from either shore, and the material for the central portion could be distributed by self-dumping scows. These shore sections of the embankment would afford valuable wharfage, and cheapen the cost of the approaches. At the Strait of Canso, N. S., where the water is very deep, and one of the shores considerably elevated, the comparison as to cost, with the usual methods of tunnel construction, would be most favorable. On the elevated shore of the strait, the grade could be greatly modified, as well as the cost of construction, by extending the embankment for a considerable distance above the surface of the water. Either a bridge or an ordinary tunnel at this point is considered a serious engineering problem.

Similar engineering skill would be required in carrying out the proposed plan for the harbor of this city. Bay of Fundy tides are well known for their unusual height, and have a range in this harbor of about 30 feet, leaving the smaller shipping stranded at the docks, when the tide is out, and greatly aggravating the difficulty of providing the larger shipping, to which such methods are dangerous, with adequate wharfage. The entrance channel to the harbor is very narrow, with a small rocky island and breakwater on one side, and about three miles of shallow rock flats on the other, which also extend over a large area of the harbor, and render it worthless to shipping except at high tides.

Beginning at the opposite shore and working out toward the entrance channel, an embankment of clay and rock ballast, say 50 or 100 yards wide, could be constructed at a moderate cost, and when completed would only leave an outlet at the entrance channel equal in capacity to the volume of the river water entering the harbor, which would then maintain the high water level. A lock would be required near the outlet to accommodate ships entering the harbor at low tide, but of course the outlet could be used at all other times. Some engineering difficulties might be encountered during the course of construction, but they could doubtless all be overcome. By providing drawbridges at the lock and outlet, traffic across the embankment could be accommodated, but such equipment would be of more value at a point farther up the harbor, where a ferry service to Carlton is established, across a narrow arm (the river channel) of the harbor, which could be crossed in the same way, by a bridge and embankment, through which only a channel (not graduated) would be necessary. The embankment at the entrance of the harbor could, of course, be abandoned, and the whole equipment located here, but the capacity of the harbor would be greatly reduced, and shipping still exposed to the dangers of the long narrow entrance channel. This plan of harbor improvement, unlike some others proposed, would not complicate the sewage problem, on interference with the passage of silt and rubbish, brought down by the river.

Embankments of this description could be built out from the shores of rivers obstructed by shoals and rapids, where the banks have sufficient elevation to retain the water, making them into a succession of elongated lakes, which could be entered, in both directions, by means of locks and graduated outlets, as previously described. Provision would have to be made for floods, but this could be done by paving portions of the embankments with stone or brick, over which the water would flow at the proper elevation. The cost would surely be far less than would be necessitated by a system of canals. An embankment subjected to somewhat similar conditions has long been in use at Holyhead, Wales, over which the Chester and Holyhead railway passes. It is three-fourths of a mile in length, with a gap at the center through which the tide rushes with great violence.

One of the best opportunities for putting this project into successful operation is afforded by the St. Lawrence and Ottawa rivers, and a small tributary of the latter, almost completing the connection with Lake Nipissing and thence to Georgian Bay by the French River. Only about twenty-five miles of canal would have to be excavated, and if no greater obstructions stand in the way, the opening of this route to large vessels would prove an inestimable boon to Canadian and Western commerce.

W. F. CLEVELAND.

Royal Hotel, St. John, N. B., Canada.

Oil Well Fires in Texas.

To the Editor of the SCIENTIFIC AMERICAN:

We note with pleasure the extensive space you have devoted in your issue of January 10 to the Southwestern oil fields and to the fires which have occurred in these fields in the last six or seven months. It is hard for people in the East to realize the entire significance of this great oil belt, extending across Texas and Louisiana, which has been tapped in the last two years at a half-dozen places. We believe the Texas and Louisiana oil fields are worthy of more attention by the Eastern papers in the way of legitimate treatment, such as you have given the subject in your recent issue.

We regret, however, that your correspondent has misstated the facts in several particulars, and we take the liberty of suggesting that you make a correction of these mistakes, if this is consistent with your editorial policy.

To begin with: The statement that one of the largest wells in the Jennings region caught fire and blazed for several weeks, is incorrect. This well was ignited from an oil tank which was set on fire by a stroke of lightning, July 15, and burned continuously until July 21—about six days. It was extinguished in one half minute by the use of steam and water. The well in question is the property of Heywood Brothers, and after the fire it was put into service and has yielded more than 30,000 barrels of oil a month, producing a net revenue exceeding $7,600 a month.

Regarding the Spindle Top fire, your correspondent states that one of the fires destroyed property covering ten acres of the Hogg-Swayne tract and raged for two weeks. He states that this fire occurred in September, and that at one time fifty wells were on fire and that twenty workmen lost their lives before they had time to escape. He probably refers to the first fire on Spindle Top Hill, which occurred in September, and was confined to the Keith-Ward subdivision and a portion of the Higgins tract. Only one well burned continuously in this fire, although ten or twelve were ignited at intervals, but were extinguished without difficulty. This fire lasted three days. There was no loss of life in this fire. In October a fire occurred in the Hogg-Swayne tract, destroying about fifty derricks, and in this fire one workman was burned so badly that he died. In this case the fire lasted only eight hours.

The statement made by your correspondent that water has proved ineffective in extinguishing the Southwestern oil fires is also incorrect. In the Beaumont fires, water was relied upon, as it was at Jennings, and combined with steam, it had the desired effect. It must be remembered that when a stream of water is turned upon a red-hot pipe or tank, it is immediately converted into steam, and this has the same effect as if steam were sprayed upon the fire from pipes.

We trust that you will make these corrections, because we believe they are essential facts and deserve to be properly stated. Considerable prejudice has been raised against the Texas oil fields on account of the fires, and sensational newspapers have seized upon every possible excuse for printing glaring accounts of the few fires that have occurred. We believe that the loss of life and property through fires has been remarkably small.

HOLLAND S. REAVIS.

Jennings, La., January 13, 1903.

Natural Growth of Mushrooms in a Circle.

To the Editor of the SCIENTIFIC AMERICAN:

In SCIENTIFIC AMERICAN of January 3 an article accounting for mushrooms growing in the form of a ring on account of the exhaustion of the organic matter is misleading and incorrect.

Mushrooms do not come from seed or spores directly. The spores produce mycelium under favorable conditions; and this mycelium will produce mushrooms if the conditions are favorable. Otherwise mycelium will reproduce mycelium, and if conditions remain unfavorable during the first two generations, then there are seldom, if ever, any mushrooms produced until the sixth or seventh generation, when some mushrooms may develop, otherwise the ring and time are extended to about ten or eleven generations. If Prof. F. S. Lamar will take some soil that was inside the ring, or soil upon which mushrooms have grown the previous season, and will plant some first generation mycelium, making the conditions favorable, he will find that it will produce mushrooms and prove his theory wrong. Mushrooms are not particular about the kind of soil they grow in, organic matter sufficient is produced annually, but they are very dependent upon suitable moisture and temperature. Mycelium is more dependent upon the kind of organic matter and less upon moisture and temperature. Fairy rings of fungous growth can be produced by design by controlling the conditions, and thus prove the correctness of my theory.

A. B. LECKENBY.

Eastern Oregon Experiment Station, Union, Oregon, January 28, 1903.

A Tidal Wave in the Pacific.

On February 9 the Low Islands in the South Sea suffered much damage from a tidal wave. Of the hundreds of islands to be found in the Pacific, many of them located in lagoons surrounded by coral reefs, the Low Islands are perhaps the most exposed. The islands take their name from the peculiar classification of the inhabitants of the South Sea. Islands are divided into high and low. Thus it comes that the Paumotu Islands are often named on the maps the Low Islands. Like many of the South Sea islands, the Paumotu or Low Islands are of coral formation, rising not more than 20 or 30 feet above the level of the sea, and therefore particularly exposed to tidal waves. The High Islands, on the other hand, are of volcanic origin, and sometimes project their heads to a height of 8,000 feet. In the Hawaiian group still higher elevations are attained. The Paumotu Islands have an area of about 400,000 square miles, which is about half as large, again as the State of Texas. Fortunately, in view of the recent disaster, their population is small. Had the calamity occurred in the High Islands, which are more thickly populated, the fatalities would perhaps have been appalling.

A Scarlet Fever Serum.

The announcement was made at Berlin, February 2, that a scarlet fever serum had been discovered which seemed full of medical promise. Experiments were said to have been conducted by Dr. Aronson, which were quite successful. The result of these experiments was announced by no less a person than Prof. Baginsky, the head of Emperor and Empress Frederick Children's Hospital of Berlin. He is, therefore, in a measure responsible for the announcement of the therapeutic value of the Aronson serum.

The Current Supplement.

The current SUPPLEMENT, No. 1416, opens with a most elaborately illustrated article on "Electric Traction at Cape Town." Henry R. Lordly discusses exhaustively the subject of anti-friction bearings, illustrating his text by many telling diagrams. Two articles on calculating machines, one on a mechanical cashier, and the other on an automatic adder, subtractor, divider, and multiplier, should be read with interest. The English correspondent of the SCIENTIFIC AMERICAN begins his account of the Water Supply of London. C. F. Saylor presents in an interesting article the progress of the beet-sugar industry in the United States. "The Universe as an Organism" is the title of a semi-philosophical paper which contains much food for reflection. Prof. Bedell, who recently announced a method of using one wire for transmitting alternating and direct currents, discusses the subject in a popular paper.

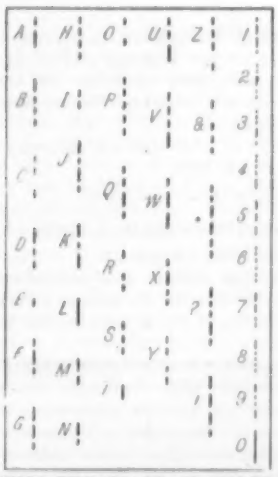

HOW THE BOARD IS WIRED FOR THE MORSE ALPHABET.

RECORDING TELEGRAPH FOR AMATEURS.

BY THE LATE GEORGE M. HOPKINS.

If the question of utility controls one in making and trying a piece of apparatus, it is useless to expect to realize anything in the way of profit from the recording telegraph illustrated and described; but a few interested amateurs can co-operate, and with a wire and transmitter for each can secure a practical knowledge of the workings of some of the large telegraph systems and of some of the applications of electricity, which could not be secured in any other way. The expense would be slight, when there is a joining of amateurs for one purpose.

It is assumed that an ordinary sounder is available for the central office recorder, and that every subscriber will furnish a transmitter, a wire to communicate with the central office recorder, and battery sufficient to operate one branch of the central office system.

In making the central office recorder, a common sounder is pressed into service. It is provided with a stylus-holder which is clamped to the free end of the armature lever. The stylus is a piece of steel wire 1-16 inch in diameter and 1 inch long, with a rounded and hardened point. It is clamped in place by a set screw.

Under the free end of the armature lever is journaled an arbor, carrying a wooden roller having a V-shaped peripheral groove at the center, exactly under the stylus; so that when a paper strip passes over the roller, the stylus can make a slight depression in the paper, when the sounder magnet is actuated.

The principal features of this telegraph are a simple transmitter for giving fixed calls, like a call box, and the mechanism for carrying the paper tape over the grooved spool and under the stylus. The roll of tape as purchased from the dealer is carried on a wooden reel, supported by a standard at the rear of the sounder. Between two standards in front of the sounder are journaled two rollers, *a b*. The roller *a* is flanged and provided on its periphery with three or four rubber bands, to give it frictional contact with the paper tape. The lower roller *b* is covered with a piece of rubber tube and the shaft of this roller carries a small governor *c*, for regulating the speed of the tape. The tape extends over the roller *b*, thence downward under the flanged roller *d*, then upward to a fastener. The roller *d* is provided with a weight which actuates the mechanism.

It will thus be seen that the paper tape is carried through the machine by the action of the weighted roller *d*, and its motion is regulated by the governor *c*. The governor *c* consists of a slotted hub *f*, links *g g*, pivoted in the slots of the hub, a slotted sliding block *h*, placed loosely on the shaft of the roller *b*, weighted arms *i i* pivoted in slots in the block *h*, and pivotally connected to the outer ends of the links *g g*, and a light spring, *j*, tending to draw the weighted arms *i i* toward each other. The block *h* is provided with a leather washer *l*, which produces necessary frictional contact with the standard, when the weighted arms are thrown out by centrifugal action. The tape reel is provided with a slight spring for checking its motion when the paper feed stops. In the side of the block which carries the stylus is inserted a small stud, in which is clamped a wire *m*, having its free end near the side of the roller *a*, flattened and turned up at right angles. The flattened end of this wire *m* lies in the path of a small pin projecting from the roller *a*, so that whenever the armature lever is drawn down by the magnet, the pin is released, and the roller *a* is allowed to turn, but when no current passes the magnet, the armature lever rises and brings the flattened end of the wire *m* into the path of the small pin, and stops the movement of the roller *a*, and consequently arrests the progress of the paper, until the pin is released by another action of the armature lever. Binding posts placed at the rear of the sounder are connected with the magnet electrically in the usual way. To transmit a signal over a line connected with this instrument, it is not necessary to understand the telegraph alphabet, nor to know anything in regard to telegraphy. The signals are pre-arranged, so that the operation of sending is purely mechanical.

The signal board here represented in detail, was invented and patented years ago by William Hadden, but the patent has long expired. This simple device consists of a board, a few inches wide, and perhaps twice the length, depending on the number and length of the messages sent. The board here shown is 4½ inches wide, 7 inches long, and ¾ inch thick, with as many longitudinal grooves formed in it, as there are signals to be given. The signal board must be of very hard wood, and the dots and dashes of the signals are formed by sewing No. 30 plain copper wire through holes extending through the board, from the grooves in front to the grooves in the rear. As the signal transmitter is at present constructed, the copper wire sewed through the first set of holes represents the letters of the Morse alphabet from *A* to *F*, with a dash between each letter. The sewing in the second groove represents the letters from *G* to *J*. The sewing in the third groove represents the letters from *K* to *M*, and so on. All of the wires forming these letters are connected together at the top of the board, by a wire on the back, which is in electrical connection with the binding post seen to the right in our view of the signal apparatus. The binding post at the opposite edge of the board is connected on the back of the board with a third binding post, at the lower end of the board. The third binding post is connected by a flexible cord with a wire, having a flattened end, and provided with a wooden handle. Sending a signal consists simply in drawing the flattened end of the wire with a uniform speed down one of the grooves. The first two binding posts, being connected with the binding posts of the recording instrument and with a battery, when a signal is sent, the recorder is released automatically, and the detent is constantly withdrawn from the pin in the roller, so long as the signal is being sent, and the message is thus recorded. When the signaling stops, the recorder is stopped by the action of the detent.

Several transmitters may be connected with the recorder, and one wire in each case may be dispensed with, by grounding the other at each end.

The recorder will run long enough to record a long signal or several short ones, with one raising of the weight carried by the paper tape.

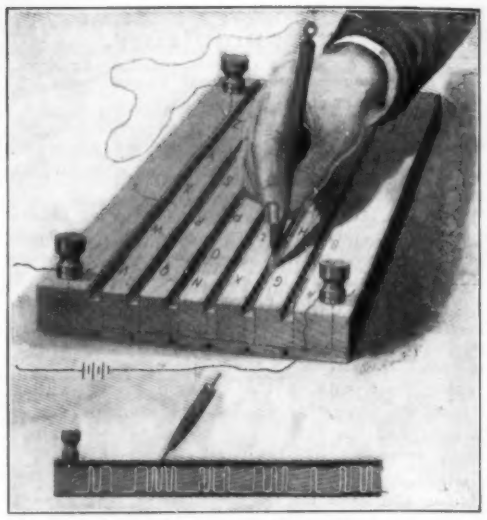

VIEW OF THE TRANSMITTING APPARATUS.

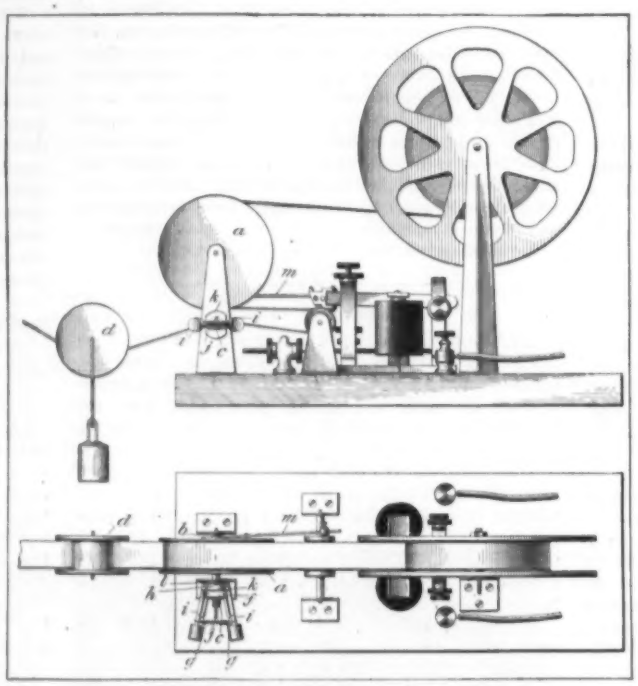

DIAGRAM OF THE HOPKINS RECEIVER.

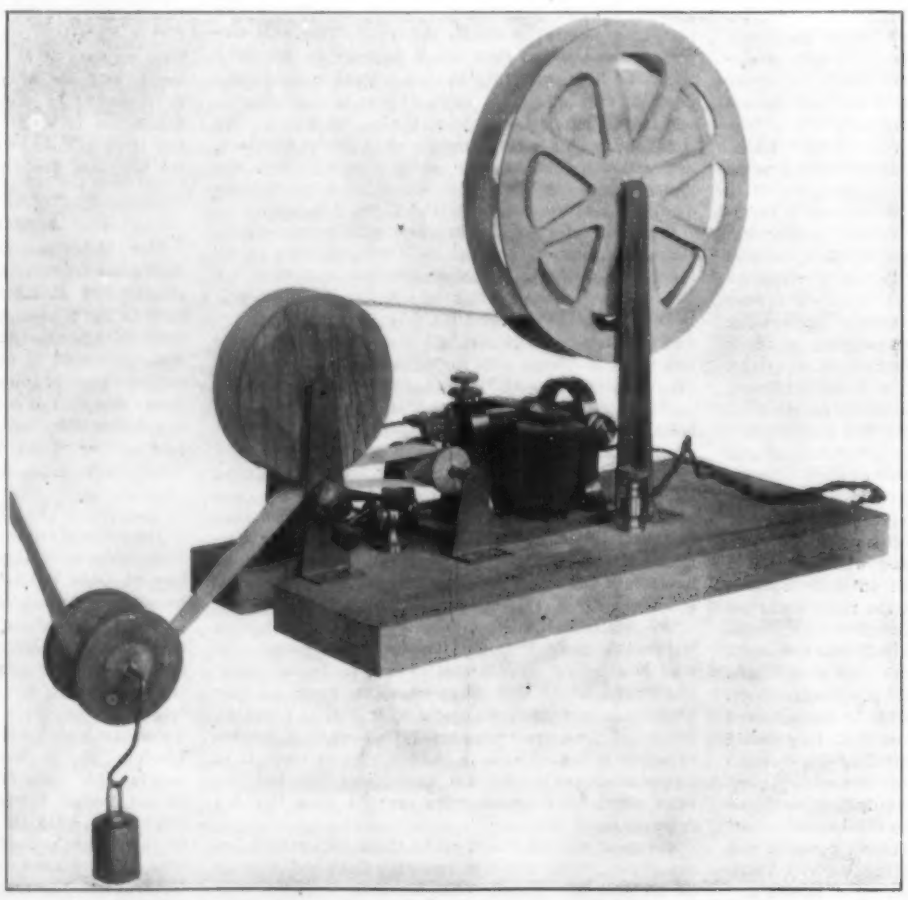

THE RECEIVING INSTRUMENT OF THE HOPKINS RECORDING TELEGRAPH.

The motive power used in the manufacturing establishments of the United States in 1900, according to the census report, aggregated 11,300,081 as compared with 5,954,655 in 1890, 3,410,837 in 1880, and 2,346,142 in 1870. During the census year steam power represented 77.4 per cent, water wheels 15.33 per cent, horse power 1.3 per cent and other forms of mechanical power one-fifth of one per cent. New York leads the States in the use of water power, having 368,456 horse power derived from that source.

VENOMOUS SNAKES.—II.

BY RANDOLPH I. GEARE.

The American species of Elapids known to be poisonous are the Harlequin Snake, or Bead Snake (*Elaps fulvus*), and the Sonoran Coral Snake (*Elaps euryxanthus*).

The Harlequin Snake is found in Virginia, Georgia, Florida, Alabama, North and South Carolina, and Mississippi, and north along the Mississippi, Missouri, and Ohio Rivers. In southern Texas, too, it occurs in many localities. This snake is said to be very gentle and mild in disposition. Its favorite haunt is supposed to be underground in sweet potato fields, where it is frequently unearthed by laborers in harvesting. Its food consists chiefly of other snakes and various kinds of reptiles. One specimen found had swallowed another snake as long as itself; while, in addition, it had a garter snake about half digested. The Harlequin Snake is described as having a ground color of red with numerous black rings and intermediate spaces of yellow. The tail is alternately black and yellow.

A rather curious variety of rattlesnake is the *Crotalus cerastes*, which, as its name indicates, is distinguished by a horn over each eye. Horned rattlesnakes are most venomous.

A rattlesnake which goes by the Indian name of Massasauga is one of the small but very venomous rattlesnakes which inhabit the prairies in the western United States and territories. The most prominent of these rattlers is the *Crotalaphorus tergeminus* (*Sistrurus catenatus*). One of the characteristics of the Massasauga is the top of the head, which is covered with regular plates just as in harmless serpents, and not with scales as in most rattlesnakes. The pit between the eyes and the nose, however, is present as in all *Crotalidæ*. The Massasauga snakes are of dark, blotched coloration, and are rarely more than one or two feet long. Sometimes they are called sidewipers and sideliners from their habit of wriggling sidewise.

A few words on the structure of a rattlesnake's rattle may not be without interest. Briefly described, the rattle consists of a number of hollow, horny rings, somewhat like quill in substance, and interlocked with one another, while they are so elastic as to permit of a considerable amount of motion between them. These rings are not indicative of age, as has been supposed, since in some years several appear, while in others only one ring may be developed. Though there is a great variety of color in rattlesnakes, this feature can in most cases be used as a means of determining the species, other distinctive characteristics being found in the arrangement of the shields covering the fore part of the head.

The dread which even the bare thought of receiving a charge of the deadly venom inspires, is fortunately somewhat diminished by the well-known fact that this snake always "rattles" before striking. There has been a great deal written as to the reasons which cause them to "sound the alarm." The old theory was that the "rattling" was intended to warn the prey of their approach. This, however, seems altogether too charitable a view to take, for it is quite natural to supose that the snake would keep as quiet as possible when lying in wait for food, lest it should frighten away the approaching animals upon which it supposedly depends for its sustenance. Another view, and a more plausible one, is that, as the cobra expands its frill and the puff-adder swells and hisses, so the rattlesnake sounds its rattle for the purpose of alarming any antagonist—be it man, beast, or bird—who may design an attack. Thus it becomes a weapon of defense—perhaps an expression of fear. The snake, not being endowed with human thought, would hardly realize that in making itself known to its enemies, it was betraying itself, while by remaining quiet, its presence might be overlooked. Another common belief is that the rattle is sounded as a means of bringing to its assistance other snakes of its own kind. Prof. Samuel Aughey, in an article on the "Rattle of the Rattlesnake," confirms this belief. He says he once saw a number of hogs attacking a rattlesnake. The snake at once commenced rattling, and three other snakes almost immediately came to the rescue, but the hogs were victorious, and all the snakes were killed. Some authorities, who have made careful observations, believe that the true function of the rattle is to bring the sexes together for mating, while still others affirm that its principal use is to frighten and paralyze the victim into submission, thus acting as a kind of "charm." There is yet one more theory to account for the use of the rattle, namely, to ward off disturbers that cannot serve as food, and thus prevent a useless expenditure of venom!—surely fixing this snake as a strict economist, if true.

These theories may all be partly correct. The phenomenon may perhaps be most easily explained by accepting and applying Herbert Spencer's suggestion regarding the wagging of a dog's tail, i. e., that it is an escape of nervous force which is restrained from any other mode of expression at the moment.

No species of rattlesnake occurs in any of the West Indian islands proper. Several species are found in the United States, as pointed out, and indeed there are but few localities here where this snake is not present, or rather where it was not found before it was exterminated. Still, the area inhabited by more than one species of *Crotalus* is comparatively limited.

It may not be out of place to tell here something of the Fer-de-Lance, the deadly snake of Martinique, which is said to have been all but exterminated by the recent volcanic eruptions. This serpent may be regarded as a yellow viper of the family *Crotalidæ*, designated zoologically by the term *Craspedocephalus* (or *Bothrops*) *lanceolatus*. The Fer-de-Lance is rom 5 to 7 feet long, and is said to be capable of making considerable springs when in pursuit of prey or of some object by which it has been irritated. Its bite is fatal, the only antidote seeming to be, as in the case of bites of other venomous snakes, whisky or other ardent spirits. The serpent infests sugar plantations in the West Indies, and is dreaded alike by man and beast. The tail ends in a horny spine which scrapes harshly against objects, but does not rattle. How deadly is the Fer-de-Lance may be gathered from the description of a writer in Harper's Magazine: "If by some rare chance you encounter in the island [of Martinique] a person who has lost an arm or a leg, you can be almost certain you are looking at a victim of the Fer-de-Lance—the serpent whose venom putrefies living tissue."

(To be continued.)

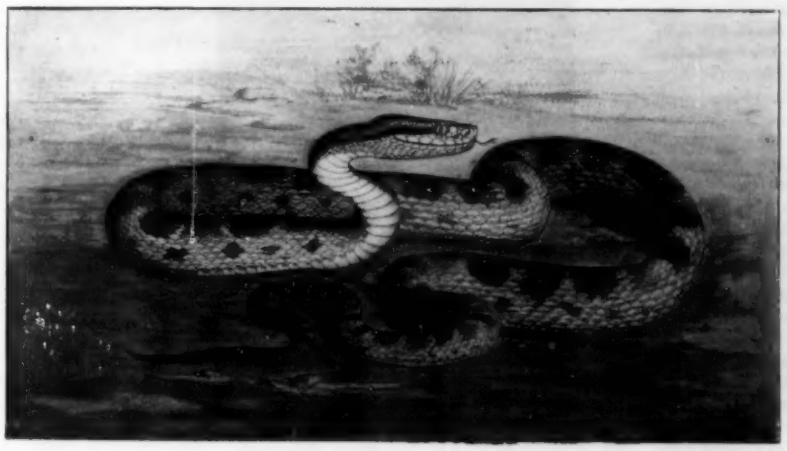

THE WEST INDIAN FER DE-LANCE.

Protecting the Sponges.

The use of the "skafander" has been abolished by Samos, Crete, Cyprus, Tunis, and Egypt. Now Turkey and Greece have followed suit. The skafander is a device by which a diver can remain under water for about an hour. He is thus enabled to comb the bottom of the sea with a thoroughness that has almost exterminated sponges in many parts. The employment is its own punishment; for the diver usually dies of palsy of the lower extremities. The law now steps in to assist nature in protecting the sponges. In addition to the skafander, the natives resort to harpooning, primitive diving apparatus, and dredging.

The frequency with which old pipes made of clay, wood, and metal have been found in England, Ireland, Germany, Switzerland and France, has led archæologists to the belief that the ancients may have smoked. The belief receives some color from passages in ancient authors. Herodotus remarks that the inhabitants of the Aroxes Islands, supposed to be the modern Volga, "were wont to throw piles of fruit on a fire and then to inhale the vapor, with the result that they became as drunk as ever the Greeks became after drinking wine, and the more fruit they threw on the fire the more drunk they became." Pomponius Mela talks in a similar strain of certain Thracian tribes. Pliny asserts that the vapor of plants was used to cure diseases, and says that in some instances it was even inhaled through a tube.

MASSASAUGA (AFTER HOLBROOK).

HORNED RATTLESNAKE (CROTALUS CERASTES).

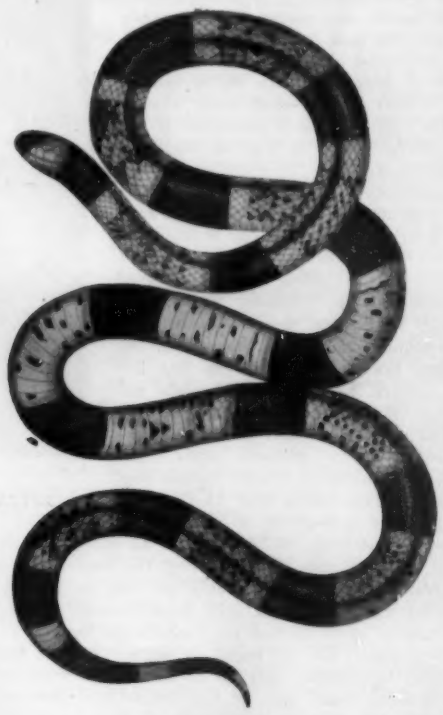

HARLEQUIN SNAKE.

NEW YORK'S STEEL ROADWAY.

The laying of a track of broad, flat, steel rails on Murray Street, between Broadway and Church Street, which was accomplished the middle of last December, was the second step in the opening of a new era of transportation in this country. The first step was the introduction of automobiles; the second is the building of good roads for them—roads that shall be suitable for horse-drawn vehicles as well.

The steel road, strange as it may seem, was first tried in unprogressive Spain, where a section of it two miles long has undergone the abuses of the heaviest kind of wagon traffic for over ten years, and yet has stood the test well. At the end of seven years, the average cost per year of maintaining the sides and center of the roadway was found to be but $380, as against $5,470 per annum paid to maintain the flint stone paving or surfacing previously used. The wear of the rails themselves was but 0.1 mm., or 0.003 inch a year.

Gen. Roy Stone was the first to see the possibilities of this form of road and to advocate its use in this country, which he did most urgently a year ago, in an address before the Automobile Club of America. President Charles M. Schwab, of the United States Steel Corporation, had some rails rolled after Gen. Stone's designs, and presented them to the Automobile Club, in order that it might lay and test them. It was thought that Murray Street offered the severest testing ground, on account of the heavy trucking through that thoroughfare. Consequently, that was the street chosen in which to make the first test. The rails have been in use two months now, and teamsters driving through Murray Street have learned the advantage in using them. Our illustration gives a good idea of the appearance of the street at present.

A glance at the cross-sectional cut will show the reader how the roadbed is prepared for laying the rails. Two 18 x 18-inch trenches are dug and filled with 1½-inch broken stone laid over a layer of old paving stones, and top-dressed with 3 inches of fine gravel. The rails are laid on this and fastened together at their ends with fish plates on the sides and bottom, while ¾-inch tie rods at intervals keep them parallel and properly spaced. In building a country road, the earth is graded up to the rail on each side and filled in slightly higher in the center, so as to give the general contour shown in the cross-section.

The rails used in Murray Street are 40 feet long and 1 foot wide, with flanges 3 inches wide on the under side and ⅝ inch wide on the top. The rail is ⅝-inch thick near the flanges, and a trifle thicker in the center. The slight flange on each side of the top of the rail tends to keep a wagon wheel from running off with any slight side-pull, while it can nevertheless easily surmount the flange when the driver wishes to run on or off the track. The rails are laid with the alternate joints on opposite sides, similar to those of a railroad track. The distance from center to center is 5 feet, 6 inches. The weight of the rails is 25 pounds to the foot, or 132 tons per mile, and the estimated cost of a mile of track, including laying, is $4,000. Gen. Stone believes, however, that on country roads lighter and narrower rails weighing but 100 tons per mile can be used, and, with steel at $18 per ton, as it is in times of depression, this figure can be cut in half. When once built, a road of this type will last a generation if the earthen part of it is kept in repair at slight expense.

Comparative tractive tests have demonstrated that the power required to haul a wagon on a steel roadway is less than one-fourth that needed on the ordinary stone road. According to the report of a Pittsburg, Pa., engineer, Mr. F. Melberger, who made some tests with a 1,350-pound wagon on a steel road, the average drawbar pull per ton was but 3.23 pounds, as against 41 pounds per ton on macadam and from 75 to 102 pounds per ton on hard earth roads, as demonstrated by previous experiments made in Atlanta, Ga., under similar conditions. This means that 12 times as much power is required on macadam as on steel, and from 23 to 31 times as much on dirt roads. Experiments also show that the tractive force required on steel is considerably less than on asphalt.

These figures, coupled with those secured by the government as to the cost per ton-mile for haulage on country roads, viz., 25 cents, as against 8 cents per ton-mile in Europe, only go to show how wasteful our present roads are. Of the $90,000,000 expended annually for road transportation of farm products, etc., fully two-thirds is chargeable to poor roads.

With such facts as these before it, it is to be hoped that Congress will have the wisdom to pass the Brownlow bill appropriating $50,000,000 for assisting in building good roads, which, according to the provisions of the bill, may be built with steel rails if desired.

APPEARANCE OF STEEL ROADWAY IN MURRAY STREET, NEW YORK.

A CURIOUS CASE OF REGELATION.

Mr. Howard, of Hillsboro, Ohio, sends us a photograph of a lump of ice whose genesis is somewhat puzzling. His account of the affair is as follows:

"During a cold spell several evenings ago, I left one night a graniteware cup full of hydrant water on the floor of a wooden outhouse. There was nothing in the room to disturb it. In the morning the water was frozen, and I was greatly surprised to see a spur two inches long projecting from the block of ice on one side. The cup is about four inches across."

A CURIOUS ICE FORMATION.

Perhaps some of our readers may be able to point out some explanation; meanwhile the following theory has been suggested: The cause of this phenomenon may be somewhat as follows: The water was rapidly cooled, and a layer of ice formed at first on the surface. Then, owing probably to an unusually rapid fall in the temperature and to the fact that the granite basin is a better conductor of heat than the ice and water, a crust of ice formed lining the granite cup, and inclosing, together with the ice on the free surface, a quantity of unfrozen water in the cavity so formed. Any further freezing of water contained in this cavity must now create a pressure there, since the ice formed occupies more space than the water. But as the pressure increases the freezing point falls, as is well known, so that after a while there would be contained within the cavity of the block of ice a quantity of water at a temperature below 32 deg. F., that is to say, below the normal freezing point. A further fall of the temperature caused the formation of some more ice, and, consequently, a further increase in the pressure within the block, until at last this pressure became sufficient to burst the ice, and the water was squirted out in a jet. At the same time the pressure was relieved, and thus the freezing point of the water rose to its normal value, so that the water of the jet, being some degrees below this point, immediately froze as it stood.



CROSS-SECTION OF STEEL ROADWAY.

A somewhat similar occurrence is described in La Nature as having been observed about the middle of December last. D. Crispo, director of the government laboratories at Antwerp, writes that some of the specimens of water in his laboratory froze in the bottles containing them, and one of the bottles presented a most curious appearance, the ice protruding from its neck in a long, smooth worm, capped by the cork, which was forced out. Mr. Crispo thinks that in this case the ice was gradually squeezed out by the increasing pressure in the bottle, behaving like a viscid liquid in consequence of fusion under pressure and subsequent regelation. He does not think it likely that the water was squirted out suddenly. But it must be noted that the case recorded by our correspondent offers something different from this. The ice in the bottle might be squeezed through the unyielding glass nozzle, but if we suppose that the spur on the block of ice of our illustration was gradually forced through a hole in the block we are faced by the difficulty that here the aperture itself, having edges of ice and not of hard glass, would itself be melted by the pressure and would widen out, so that no spur could be formed.

We should be interested to hear the views of some of our readers on this matter.

THE ORANGE IN NORTHERN CALIFORNIA.

BY KNOS BROWN.

Planting of the first orange tree in the Sacramento Valley was coincident, almost, with its permanent occupation by Americans. Very few of the early miners dreamed of more than a temporary settlement in the land of gold. They had but one purpose—the sudden acquisition of wealth and a return to their distant homes to enjoy it. To most persons the character and resources of the new country were not even conjectured. Geographical science, fifty-four years ago, probably knew less about California than is now universally known about the interior of Africa. A few years' residence by the new settlers, however, was sufficient to demonstrate the transcendent charm of the climate and the exuberant fertility of the soil, and to convince them of the wonderful agricultural resources of the new land.

Cultivation of the orange as a commercial proposition in these northerly regions was one of the results of the sequestration of placer mining under the anti-debris law—the golden fruit to supply resources that had hitherto been drawn from golden sands. Progress has been rapid. In 1893, but four cars were shipped from the Sacramento Valley. In 1896, shipments had increased to 81 cars, but, in 1901, the total cars shipped out numbered 2,341, a number which fairly entitles northern California to more than a respectable position in the orange fruit trade.

The city of Oroville, Butte County, may be fairly regarded as the center of orange cultivation in the Sacramento Valley. It is 450 miles north of Los Angeles, and in about the latitude of Philadelphia. Soil and climatic conditions are especially favorable here, and the orange tree reaches its fullest proportions and the fruit its most perfect flavor. The mean annual temperature here, as in all the orange growing counties of the valley, averages but four-tenths of a degree below that of Los Angeles. So mild is the climate that frost never damages the orange groves of the locality, neither do pests, which southern orange growers have ceaselessly to combat, ever prove a serious menace. The orange growers of the Sacramento Valley boast that their fruit ripens two months earlier than in southern California, which lies 7 degrees farther south. By the time the northern orange crop is gathered, shipped, and sold, the southern orchardist is beginning to pick his fruit.

Throughout the Sacramento and San Joaquin valleys plantations of orange trees are located on the

bluffs or foothills, in preference to valleys, which are more liable to be reached by frost. The soil preferred is that of a deep, gravelly, ferruginous, and porous nature. Though thousands of young trees are planted yearly, additional to those in full bearing, the limit of

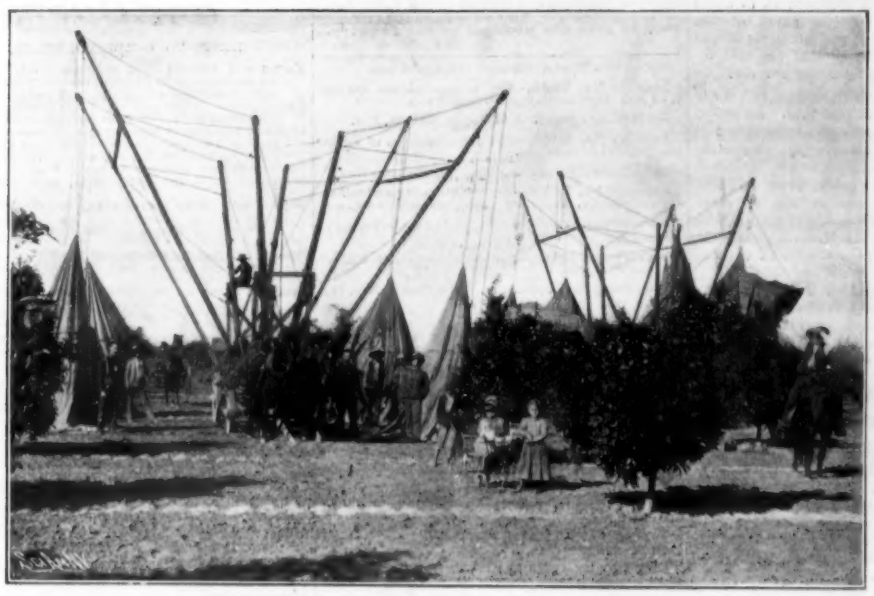

ERECTING TENTS OVER ORANGE TREES BY MACHINERY.

acreage is very far from being reached in California. There is no danger from an oversupply of fruit. The market seems to be boundless.

The methods pursued by the orange cultivators of Butte County are such as any one, even though not experienced in the business, can easily acquire. There are no secrets about it. The first requirement is in land selection, about which there need be no difficulty, the only choice being the distance from the shipping point; the nearer the land to this, the more expensive it is naturally. Irrigation is an absolute necessity, owing to the scant summer rains. Water is piped to the lands under a common ditch.

Preparing lands for orange cultivation involves repeated plowings and harrowings both ways, in order to pulverize the soil and extirpate vegetation. The ground should be leveled and hollows filled up. With a gentle slope, a regular flow of irrigating water is assured. Land is plowed to a depth of 7 inches. Fertilizing with stable manure and nitrates is customary. Orange growing exhausts the soil in time, and it is necessary to restore its diminished strength.

Trees are planted 25 feet apart or 70 to the acre. Year old seedlings are procured from the nurseries. In three years these seedlings attain a strong growth, the trunk measuring in diameter about 2½ inches. The trees, now ready to bud, are pruned. This is done by cutting off all upper branches, leaving nothing but the forked stump, which is from 3 to 4 feet high. Two incisions like the letter T are made in the bark, into which the new bud is inserted. A string tied around the cut keeps the opening closed and the new bud soon begins to show signs of growth. About two buds are inserted in each trunk, all superfluous growth is checked, and every atom of nourishment is directed toward the development of the new grafts. During budding the stumps are covered with sacking to prevent too rapid evaporation and to afford protection from the sun's heat. September and October are the budding months. From the time of planting the first seedlings the land is cultivated without much cessation. February, March and April are the months when the ground is plowed and cross-plowed. Afterward it is harrowed each way to within three feet of the trunks. Under the trees the soil is cultivated by gangs of men. February and March is the time for pruning. All low and superfluous growth is then cut down. Water is generally conducted to the groves in pipes placed below the surface with openings at convenient places. Ditches are run between the rows and three feet distant from the trees, three ditches between each row. Water is supplied at least once each month and for twenty-four hours at a time. After each irrigation a harrow is run over the ground and the temporary ditches leveled. May, June, July, August, September, and October are devoted to cultivation and general oversight. In November the fruit begins to mature and all else is dropped in order to gather the crop. The gathering season is in full operation by the middle of the month, when the labor of every man, woman and child is utilized for picking, packing and shipping the ripe fruit. This essential matter being concluded, the season is over and the orchardist is permitted a rest.

Three years after budding or six from planting the seedlings the trees begin to bear. The first crop is 280 oranges, the second averages 420, increasing in number each successive year, provided that cultivation and care is never neglected.

In scientifically conducted plantations the soil is kept absolutely free of extraneous vegetation, every atom of nourishment being required by the tree. The orange tree is a rapid grower and yields prolifically when properly attended to. Neglect is promptly indicated by shrinking and discolored foliage and diminutive fruit. In health it displays every evidence of thrift. When properly cultivated, the orange is one of the most beautiful of trees.

Co-operation among neighboring orchardists provides for handling and shipping the ripe fruit. Uniformity of grade and other advantages are thus secured. A central packing house receives from the orchards. The highest grade is 80 to the box, diminishing to 96, 112, 126, 140, 150, 176 and 200 to a package. Packing and papering is done by ordinary help, requiring no especial skill. The grader is a simple contrivance with a large hopper into which fruit of all sizes is dumped, the sizes being separated in passing down the incline, each passing into its proper opening. The oranges cultivated are the Washington navel and Tangarines. The amount of help required in the orchard varies with the seasons. In picking time the number of hands is greatly increased, as it is during the season of pruning. Ordinarily one man to thirty-five acres is the rule.

SETTING UP TENTS BY HAND TO PROTECT THE ORANGE TREES.

GENERATING POISONOUS GAS TO KILL SCALE INSECTS.

The cost of starting an orange orchard in the Oroville district, land at from $40 to $75 an acre, has been estimated as follows: Plowing, harrowing both ways, $60 an acre; digging holes to set out trees, $40; seedlings (80 to one acre), $48; cooler for irrigating, $5; labor, per acre, $5; or a total of $108, exclusive of the cost of the land. Second year the expense per acre is estimated at $25.50; third year $20.50, and fourth year $23.80, fifth year $26.50, or a total for five years of $204.30. Ordinary cost of clearing land is about $15 an acre. Orange lands in full bearing are now selling at $1,000 an acre. In the sixth year after planting, an income is to be expected from the orchard, which will increase year after year in proportion to the skill and care displayed in cultivation.

The new Morningside exchange of the New York Telephone Company represents an investment of $300,000 and has a capacity for 72,000 wires. It is located on 124th Street near Seventh Avenue, and has just been opened for use. The switchboard alone cost $125,000. It is equipped with a newly patented device, by means of which any of the subscribers on a party line may be called up without ringing the bells of the others.

RECENTLY PATENTED INVENTIONS.

Agricultural Implements.

CULTIVATOR.—G. K. SPITZENBERG, Forsthaus Linzmühle, near Pfaffendorf, Brandenburg, Germany. Primarily this implement is for forestry cultivation, but may be used also in agriculture and horticulture. The soil to be treated is loosened and mixed to the required depth, by means of rotarily-moving knives or blades, without reversing the layers of soil. This is done in such manner that (in forest soil) the vegetable soil will be most plentiful on top and no sharply-defined line will exist between loosened and unloosened soil. Pressure is then brought to bear on the loosened soil, which is finally covered with a fine loose granulated layer.

BAND-CUTTER AND FEEDER.—J. H. FLORENCE and J. E. MISNER, Wichita, Kan. In the operation of this machine, the straw carrying the grain is fed to the endless carrier and is carried upward to the band-knives, which cut the bands. Thence it passes to one of the retarders near to the upper right-hand end of the carrier, this retarder having considerable speed, after which it passes over this to the other retarder, which has a comparatively slow speed, and thence to the wheat-wheel, the straw being operated upon by the rotary knife. The straw-gate prevents the straw from passing through, so that the knife acts directly upon the straw; otherwise the device works as any other similar feeder.

Dentistry.

MANUFACTURE OF DENTAL CROWNS.—E. V. WILLIAMS, Argyle, Wis. Practically embodied in the patent here presented are certain new and useful improvements in the manufacture of dental crowns, whereby a seamless crown is produced conforming in every detail as nearly as possible to the original tooth.

ARTIFICIAL TOOTH.—W. F. WHEELER, Spencer, Mass. Mr. Wheeler furnishes in his dental invention new and useful improvements in artificial teeth whereby their cost is greatly lessened, and at the same time a very strong and durable attaching stud is provided. The stud can be made of less expensive metal than that required for the socket, and as both are not made of the same expensive material it is evident that the tooth can be very cheaply manufactured.

Electrical Devices.

ELECTROHYDRAULIC VALVE.—C. ENBERG and J. ERICKSON, St. Joseph, Mich. This invention relates to an appliance operated by electricity for opening and closing a valve for a hydraulic conduit or analogous structure. By aid of the mechanism of this device, an operative may open and close any hydraulic valve, however cumbersome, by the mere pressure of a finger. If desired, the wires may be run any length, and the operative be able to actuate the valve from such distance.

Engine Improvements.

EXPLOSIVE-ENGINE.—J. WILLOUGHBY, Brooklyn, N. Y. In its preferred form this engine embodies a double crank-shaft to which are connected the rods of four pistons, working, respectively, in four cylinders, and giving four impulses to the shaft during every revolution. By air compressing means the products of combustion are swept out of the cylinders immediately before fueling, which operation is controlled by a cam working in time with the movement of the cam-shaft.

APPARATUS FOR TESTING PRESSURE-GAGES.—A. G. WOOD, New York, N. Y. The device enables an inspector to make a quick connection with the gage to be tested without disturbing the gage's position or connection to accurately test the gage, and in case of such gage being located on a locomotive, for instance, to allow of testing it along the route, whether the engine be dead or under steam.

AUTOMATIC CYLINDER-COCK.—E. L. JONES, Memphis, Tenn. When water of condensation collects and is allowed to remain in steam-cylinders it will form a resisting medium that is only slightly compressible and frequently causes cylinder-heads to be forced off by the reciprocating action of the piston within the cylinder. Mr. Jones's device will automatically drain off the water of condensation which may collect in a steam-cylinder. The contrivance may be operated by hand to drain off any water of condensation when the engine is not running.

Hardware.

NUT-LOCK.—W. NOBLE, West Union, W. Va. The inventor adapts this improvement for general application to screw-bolts without alteration of the bolts and also upon square or hexagonal nuts with but slight change, that will not materially add to cost of production, the nuts being held at any desired point on the bolt thread against displacement, but capable of removal by a suitable wrench.

SPIKE-PULLER.—T. G. BROWN, Gillespieville, Ohio. Certain details of this tool provide increased usefulness over those heretofore made and at the same time afford maximum strength to withstand rough usage. Adjusting means are provided by which the pivoted jaw may be set as desired to insure proper gripping action. The puller will effectively grip hard and smooth spikes and spikes of varying sizes.

Miscellaneous.

GALLEY.—P. J. COONEY, Philadelphia, Pa. The improvements in this invention are directly allied to the printing business, and more particularly to the production of a galley having an efficient lockup so arranged as to avoid distortion of certain delicate parts of the galley. The quoin, screw, and all parts of the device are non-detachable, so that the user always has a complete galley ready for use.

VITRIFIABLE PHOTOGRAPHIC DECORATION.—L. CRABTREE, Newark, N. J. Embodied in this invention are new and useful improvements in vitrifiable photographic decoration for producing photographs especially designed for decorative effects on china, glass, earthen, and stone wares, enameled metals, or other material yielding to vitrifiable decoration, the photograph appearing indestructibly on the finished article in a desired color and without a gelatin carrier.

COOLER.—F. GUTTENBERG, Brooklyn, N. Y. This is a portable device arranged to keep the liquid cold without danger of becoming contaminated by ice or other cooling medium, the construction allowing quick removal of an empty receptacle or the ready insertion of one filled with plain water, or liquid, to be cooled.

OBSTETRICAL SHEET.—SARAH FAULKNER, New York, N. Y. Incorporated in this sheet is a pad of two or more, preferably six, sections or members placed one upon the other and so attached that a solid section may be quickly and easily removed, exposing a lower and clean section. The several sections are so constructed that they will be comfortable to lie upon and of an absorbent nature with protective covering, which will prevent one section soiling another or the bedding.

RIDING-STIRRUP.—W. G. MURPHY, Yankton, S. D. A rider wearing an ordinary boot, shoe, or any footwear, can use this device with ease and freedom, as the movable shield is so shaped that it conforms to the instep, and a broad convex surface minimizes the friction on the foot. The stirrup resists the strain or pressure of a falling horse, and the shield tends to brace and strengthen the side portions of the stirrup which will not give way and break when fallen on. The shield has a free swinging play in an upward and rearward direction; but is so disposed that the upward movement is limited or arrested by the cooperation of the stirrups in order that the shield may be prevented from moving too far and to cause it to drop by gravity back to its normal operative position.

SUSPENDERS.—I. WECHSLER, Brooklyn, N. Y. This invention bears particularly on improvements in the back rings for suspenders, the purpose being to provide a back ring so advantageously arranged that the suspenders may be turned in it and held in position to pass over the wearer's shoulders or turned and held in position to serve as a belt.

DISPLAY-CABINET FOR RIBBONS.—N. LAFON, Earlington, Ky. Mr. Lafon has produced a ribbon-holding device that will exhibit the ribbons while in wrapped-up condition, and he has aimed to provide a cabinet with features that adapt it for convenient service to expose the end portions of ribbon bolts for inspection while in the cabinet and to suffer the removal of any bolt or ribbon, as may be desired.

CHAPLET AND SHRINE OF THE HOLY ROSARY.—T. SAULT, New Haven, Conn. The purpose of the inventor is to here provide a new and improved chaplet and shrine of the holy rosary designed for devotional purposes and arranged to enable a person to successively display pictures of a religious character one at a time and in proper order, according to the designated devotional exercise.

SLED ATTACHMENT.—E. C. WHITNEY, West Fitchburg, Mass. To prevent sleds from sluing or moving sidewise and at the same time to avoid complicating or increasing the cost thereof, the invention provides a gripper-plate of such novel form and arrangement that when the sled moves straight ahead the plate lies in inactive position, but as soon as the sled begins its sidewise movement the gripper-plate automatically becomes active and firmly grips the surface on which the sled is running, thus preventing sluing. The attachment is mainly intended for use in logging and other sleds carrying heavy loads, although it is applicable to sleds of all sorts.

LANTERN-FRAME FOR LAMP-CHIMNEYS.—E. F. WEIDIG, New Orleans, La. This invention is a lantern-frame, consisting of a base, wires rising from the base to a height to extend above a lamp-chimney, and a spring-bail connecting the wires and composed of crossed arms, a coil integral with the arms and forming a finger-hold, and a ring embracing the arms at the point of crossing. The frame, in connection with a crimp-top chimney and a candle, will form a very serviceable lantern.

RULER.—T. RAMSAY, Invercargill, Southland, New Zealand. Mr. Ramsay's improvements relate to rulers used in ruling and measuring paper and for analogous purposes. The invention belongs more particularly to that type of rulers in which there are two members, together forming a square. To persons accustomed to use rulers it will be readily apparent that this device can be applied to many uses.

NOTE.—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of this paper.

Business and Personal Wants.

READ THIS COLUMN CAREFULLY.—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring the information. **In every case it is necessary to give the number of the inquiry.** MUNN & CO.

Marine Iron Works. Chicago. Catalogue free.

Inquiry No. 3805.—For a machine for cutting fruit into cubes about ⅜ of an inch in size.

For hoisting engines. J. S. Mundy, Newark, N. J.

Inquiry No. 3806.—For manufacturers of inclined stairways or elevators.

"U. S." Metal Polish. Indianapolis. Samples free.

Inquiry No. 3807.—For a machine for embroidering monograms, etc., on handkerchiefs, table linen, etc.

Coin-operated machines. Willard, 284 Clarkson St., Brooklyn.

Inquiry No. 3808.—For makers of elastic and all kinds of webbings.

Dies, stampings, specialties. L. B. Baker Mfg. Co., Racine, Wis.

Inquiry No. 3809.—For manufacturer of small motors and dynamos, also address of firm who makes Porter motors.

Blowers and exhausters. Exeter Machine Works, Exeter, N. H.

Inquiry No. 3810.—For makers of small hardwood cases.

Handle & Spoke Mchy. Ober Mfg. Co., 10 Bell St. Chagrin Falls, O.

Inquiry No. 3811.—For manufacturers of papier maché frames.

Sawmill machinery and outfits manufactured by the Lane Mfg. Co., Box 13, Montpelier, Vt.

Inquiry No. 3812.—For a machine for weaving wire and wooden slats.

Manufacturers agricultural implements for export. Hobson & Co., 17 State Street, New York.

Inquiry No. 3813.—For parties who furnish material for fitting up an open hearth acid and crucible steel casting plant, using fuel oil.

For Machine Tools of every description and for Experimental Work call upon Garvin's, 149 Varick, cor. Spring Streets, N. Y.

Inquiry No. 3814.—For firms dealing in materials used in photogravure.

Let me sell your patent. I have buyers waiting. Charles A. Scott, Granite Building, Rochester, N. Y.

Inquiry No. 3815.—For dealers in all parts of watches and clocks.

SAW MILLS.—With variable friction feed. Send for Catalogue B. Geo. S. Comstock, Mechanicsburg, Pa.

Inquiry No. 3816.—For manufacturer of small motors and turbines.

PATENT FOR SALE.—No. 699,958. Entire or by State and county rights. Address E. H. Truax, 253 Warren Avenue, Chicago, Ill.

Inquiry No. 3817.—For manufacturers of small mills for wet grinding suitable for experimental work in glass and pottery.

FOR SALE.—Brick factory 22,000 feet space, power plant, side track. Immediate possession. F. A. Clark, 184 Dearborn Street, Chicago.

Inquiry No. 3818.—For manufacturer of fancy silk cord and narrow tape.

Hand machines for marking and for cutting ovals and circles in all kinds of sheet material. Price reasonable. F. W. Starr, Springfield, Ohio.

Inquiry No. 3819.—For manufacturer of "Star" foot power screw-cutting lathe.

Manufacturers' Advertising Bureau, New York. Trade mediums a specialty. Lowest known rates. References. Correspondence solicited.

Inquiry No. 3820.—For manufacturer of solar motors.

Manufacturers of patent articles, dies, stamping tools, light machinery. Quadriga Manufacturing Company, 18 South Canal Street, Chicago.

Inquiry No. 3821.—For firms making compressed air machinery.

Crude oil burners for heating and cooking. Simple, efficient and cheap. Fully guaranteed. C. F. Jenkins Co., 1105 Harvard Street, Washington, D. C.

Inquiry No. 3822.—For makers of stenciling machines.

PATENT FOR SALE OR ROYALTY.—Waterproof, malleable iron truck and cap for flag staffs. Andrew A. Brengel, 123 North Street, Jersey City, N. J.

Inquiry No. 3823.—For makers of envelope-making machinery.

The largest manufacturer in the world of merry-go-rounds, shooting galleries and hand organs. For prices and terms write to C. W. Parker, Abilene, Kan.

Inquiry No. 3824.—For manufacturer of machinery for making wooden faucets.

The celebrated "Hornsby-Akroyd" Patent Safety Oil Engine is built by the De La Vergne Refrigerating Machine Company. Foot of East 138th Street, New York.

Inquiry No. 3825.—For makers of coal conveyors or elevators.

WATER POWER FOR SALE.—Reliable 1,500 horse power located in State of New York. Owner would equip and rent power. Davidson, Box 773, New York.

Inquiry No. 3826.—For makers of vending or slot machines.

WANTED.—One of the "Simple Electric Motors" described in the Scientific American Supplement, April 14, 1888. State price and what year the motor was made. The older the better. Address Motor, P. O. Box 773, New York.

Inquiry No. 3827.—For manufacturer of artistic furniture hardware, drawer handles, hinges, etc.

Wanted—Revolutionary Documents, Autograph Letters, Journals, Prints, Washington Portraits, Early American Illustrated Magazines, Early Patents signed by Presidents of the United States. Valentine's Manuals of the early 40's. Correspondence solicited. Address C. A. M., Box 773, New York.

Inquiry No. 3828.—For manufacturer of pipe or bolt machine that cuts two threads at once.

☞ Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway, New York. Free on application.

Inquiry No. 3829.—For dealers in parts for direct current motors, using primary battery.

Inquiry No. 3830.—For manufacturer of balloons and silk for same, also dealers in rubber tubing.

Inquiry No. 3831.—For address of parties that furnish power plants.

Inquiry No. 3832.—For makers of small bicycle pumps, etc.

Inquiry No. 3833.—For address of builders of iron and steel piers.

Inquiry No. 3834.—For manufacturers of fancy metal novelties.

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters or no attention will be paid thereto. This is for our information and not for publication.
References to former articles or answers should give date of paper and page or number of question.
Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.
Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.
Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.
Scientific American Supplements referred to may be had at the office. Price 10 cents each.
Books referred to promptly supplied on receipt of price.
Minerals sent for examination should be distinctly marked or labeled.

(8843) A. C. A. writes: Is it possible to use watchcase telephone receivers as transmitters, and if so, how? A. It is possible to use a telephone receiver which contains a magnet and a coil as a transmitter for short distances. But such an arrangement is not used even for short distances, because the microphone is much more sensitive as a transmitter. This is used in some form in almost every transmitter in the country.

(8844) A. L. asks: Can any other metal be used in the elements of the Edison storage battery instead of nickel and iron, provided one is a superoxide? If not, why so? Could not the same metal be used in both elements provided again that one is a peroxide? Could not an oxide be used instead of a peroxide? A. No other metals can be used in the Edison storage battery than he has used, else it is no longer an Edison battery. There are metals which can be used for storage cells. It is, however, most probable that the most efficient have now been tested, and that none so good as these will be found. This will not however discourage inventors from still searching and trying to discover other forms. If a metal forms two oxides, it can be used for both plates. Treadwell's "Storage Battery" treats the subject quite fully.

(8845) W. S. O. asks: About how many ampere turns will it require to economically saturate a solid soft-wrought iron or steel core, 4¼ inches by 10 inches long, to be used as a field core for alternating generator of the induction type? A. About 750 ampere turns will be required to bring a bar of iron 4¼ inches in diameter and 10 inches long to practical saturation.

(8846) E. F. asks for the dimensions of a spark coil, size and amount of wire, also how long the core should be. Is there any insulation between primary and secondary winding? A. Jump spark coils are made in all sizes according to their use. Norrie's "Induction Coils," which we can send you for $1, gives full details for lengths of spark up to 12 inches. The details of construction are quite too long for a letter. A coil giving an inch and one-half spark is described in our SUPPLEMENT No. 160 and one giving a 6-inch spark in SUPPLEMENT No. 1,124. These papers are ten cents each. Our SUPPLEMENT, No. 1,402 has a valuable article upon the cores of coils and data for the winding of a full series of sizes. You may find all the instruction you require in this article. Strong insulation is always used between primary and secondary in large coils.

(8847) F. M. F. asks how the black lead is applied to wood in making electrotypes. I desire to copperplate wood, but am unable to get good results, owing to trouble in coating same with the black lead. A. Stir the black lead into melted wax, and apply this coating while warm; if it cools off too rapidly and is found to crack, a small amount of Venice turpentine can be mixed with the wax.

(8848) W. F. B. writes: Will a Fuller battery answer for an electro magnet described in "Experimental Science" instead of the bichromate of potash? I am unable to get a battery of that description with carbon inside and zinc outside; they are all made the reverse. Does the core of this magnet get saturated, and refuse to hold the armature? A. A Fuller bichromate battery will answer perfectly for the electro-magnet in "Experimental Science." A bichromate battery with the carbons on the outside of the zinc is just as good as any. It is the way they are usually made. Your idea of a magnet core is erroneous. The more strongly it is magnetized the more strongly it attracts, until a point of saturation is reached, when no further increase takes place and the attraction remains the same. If it does not attract at all, it is because there is no current flowing through the wire.

(8849) W. H. V. T. asks how to wire a clock to ring bells every hour. A. A clock can be wired to ring bells at equal intervals, as of an hour, by causing the minute hand to close the circuit. This can be done outside the dial by a piece of watch spring bent so that the hand touches it, and makes a brief contact. It can be done on the inside of the case by a pin on the wheel which moves the

minute hand. These arrangements require some ingenuity to make them work, and may alter the time-keeping qualities of the clock. The more complicated devices can be had from manufacturers. These are more reliable and satisfactory.

(8850) G. S. J. writes: What current will you get off the secondary of an induction coil, if the primary is charged with a battery, the current run through a vibrating circuit breaker, being alternating or interrupted? If an alternating current is put in the primary of a transformer, will you get an alternating or direct from the secondary? A. The secondary current from an induction coil is direct, but interrupted when the spark terminals are far enough apart, so that the spark at the making of the vibrator is suppressed. When the spark terminals are near together, a spark is given at both the make and the break and the current is alternating. If an alternating current is sent into the primary, no vibrator is used and the secondary current is alternating.

(8851) E. W. wants the best recipe for a paint to protect iron pipes from salt water. A. A series of relative tests made some years ago by an English chemist showed that red lead and raw linseed oil, or red lead and barytes with raw linseed oil, gave the best results.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending

February 10, 1903,

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Abdominal supporter, D. Gleason	720,342
Addressing and assorting machine, L. A. Agnew	720,213
Air moistening apparatus, A. Levy	720,364
Amusement apparatus, T. Folks	720,014
Armature band, J. J. Wood	720,307
Armature banding device, J. J. Wood	720,308
Armature, drum, H. A. Balcome	720,511
Auger, earth, A. L. Kitselman	720,255
Augur, spoke, J. M. Brown	720,512
Bag holder and filler, H. T. Wiley	720,543
Bale tie, S. T. Green	720,133
Baling press, M. D. Hunt	720,148
Balls, making shells for playing, F. H. Richards	720,482
Bank and register, cyclic, O. R. Myers	720,456
Barrel head, G. F. McKeever	720,276
Barrel washer, S. C. O. Berg	720,315
Basin, catch, L. Skaife	720,290
Bath tub shower bath attachment, J. Carmichael	719,994
Battery plates, preparing storage, R. N. Chamberlain	720,326
Bearing balls, machine for reducing and finishing hollow, A. Johnston	720,436
Bed, folding swing, S. Drubech	720,410
Bell, Magneto, C. H. Thordarson	720,082
Blind and fixings for same, roller, A. E. Millane	720,372
Bog evener, A. Kepler	720,525
Boiler cleaner, steam, R. B. Hodge	720,252
Boiler compound, J. Loudenslager	720,267
Boiler furnace and flue, steam, E. Gearing	720,418
Bolster, H. T. Krakau	720,528
Bookcase, revolving, D. A. B. Stoddart	720,190
Bottle capping machine, M. E. Noyes	720,175
Bottle closure, E. M. Gilmore	720,016
Bottle, non refillable, R. Koch	720,035
Bottle, non refillable, H. A. Daniels	720,230
Bottle, non refillable, Plummer & Davis	720,476
Brake shoe, railway, J. Meehan	720,167
Brick machine, S. C. Brush	720,218
Broom, R. Rosenbaum	720,488
Brush, Moss & Blanchard	720,051
Buckle, cotton bale tie, J. F. Matthews	720,166
Buckle shield, D. E. White	720,201
Buggy seat support brace, J. S. Jones	720,437
Burner, H. Oberlin	720,466
Button, badge, A. Phelps	720,473
Cable grip, S. S. McCain	720,458
Cableway, elevated, W. Kirry	720,443
Calculating machine, J. A. Tuck	720,086
Camera, H. W. Locke	720,040
Camera, photographic, L. Borsum	720,217
Can filling device, W. H. Sedberry	720,492
Can lid or the like, milk, W. Gorman	720,421
Car and air brake coupling, combined street, L. C. Cary	720,325
Car bolster, G. H. Goodell	720,238
Car bolster, hopper, A. Christianson	720,221
Car bolster, Hopper, J. M. Hansen	720,246
Car brake, H. Jones	720,151
Car brake, R. E. Kimball	720,359
Car brake, emergency, A. Perry	720,377
Car coupling, B. Brand	720,398
Car despatchers time apparatus, Riggs & Hayworth	720,484
Car door, Scott & Scholl	720,289
Car door, box, E. F. Luce	720,368
Car draft block attachment, freight, T. M. Baughman	719,989
Car, dump, F. S. Ingoldsby	720,031
Car fender, J. P. Thom	720,502
Car gas reservoir, railway, C. Goldstuecker	720,237
Car, railway, G. E. Smith	720,291
Car safety brake apparatus, motor, C. F. Peel, Jr.	720,376
Car safety chain fastening, A. Christianson	720,224
Car step, adjustable, A. J. Coover	720,002
Car switch, automatic street, L. Devers	720,006
Car with flush door, flat bottom, J. M. Hansen	720,245
Cars, adjustable stirrup step for, A. J. Coover	720,001
Carburetor, C. Robinson	720,485
Card holder for envelopes or wallets, A Bushnell, Jr.	720,324
Carpet fastener, stair, C. W. Leslie	720,447
Carriage body, R. Stone	720,294
Case. See Book case.	
Cash register, B. K. Hoppock	720,431
Cash register, C. Laurick	720,531
Casting crucible steel ingots, J. F. McGrath	720,374
Casting packing rings, mold mechanism for S. B. Mack	720,269
Catching and delivering apparatus, T. H. Patenall	720,058
Centrifugal separator, P. L. Kimball	720,154
Chalk holder, J. B. Gury	720,240
Chatelaine bag, etc., Greenbaum & Kroll	720,131
Chime ringing device, H. A. Wende	720,541
Chimney top, F. Wunderlich	720,210
Churn, T. J. Cheeney	720,513
Churn dasher, M. V. Wisker	720,545
Cigar box, H. H. Ziemer	720,390
Cigar maker's work box, E. J. Castillo	720,111
Cigar or cigarette holder, W. E. Davidson	720,232
Clamp, H. F. A. Kleinschmidt	720,256
Clarifier cover, centrifugal, W. W. Price	720,479
Cloth cutting machine, W. Cormany	720,227
Cloth folding mechanism, F. D. Taylor	720,081
Clutch, friction, M. Campbell	719,993
Coal, briquetting, A. Waddell	720,088
Coated articles, apparatus for removing surplus metal from, G. Porter	720,283
Cock, gas, W. E. Hawkins	720,027
Coin bunching machine, J. Rice	720,070

(Continued on page 143.)

We will mail you

THE SATURDAY EVENING POST

Every Week from the time your subscription is received TO JULY 1, 1903

For Only 50c

STORIES OF AMERICAN LIFE

By OWEN WISTER

SKOOKUM SMITH AND FRISCO BALDY is the title of the next story in the series that Mr. Wister is now writing for this magazine. Skookum and Frisco are friends of The Virginian, and are the heroes of some surprising adventures.

By WILL PAYNE

TALES OF BLUE RIDGE: Six independent stories, which follow the rising fortunes of a printer's devil, and show how success and fame were won in the early days of the West.

By EMERSON HOUGH

THE LAW AT HEART'S DESIRE: Tells how Justice first got a foothold in a little mining town and how her champion, Dan Anderson, secured the acquittal of his friend Curly, at whose door was laid the sudden death of a pig.

By GEORGE ADE

TALES OF A COUNTRY TOWN: Only a humorist like George Ade could find a village boasting six characters with histories as plausible, and yet as absurdly funny, as those told in this series.

By F. Hopkinson Smith

Another popular contributor to the magazine is Mr. F. Hopkinson Smith. His next tale, entitled A POINT OF HONOR, is a clever, humorous story, which centres around a French duel over an absurd misunderstanding.

THE SATURDAY EVENING POST

Is a Superbly Illustrated Weekly Magazine. Half a million copies sold every week. Everybody is reading it. The regular subscription price is $2.00 a year. In clubs of 4 or more, $1.25 each. All newsdealers have it at 5 cents the copy.

The Curtis Publishing Company
Philadelphia, Pa.

WOOD or METAL Workers



Without Steam Power should use our Foot and Hand Power Machinery. Send for Catalogues
A—Wood-working Machinery,
B—Lathes, etc.
SENECA FALLS MFG. CO.
697 Water St., Seneca Falls, N.Y.

ENGINE & FOOT LATHES. MACHINE SHOP OUTFITS. TOOLS AND SUPPLIES. CATALOGUE FREE. SEBASTIAN LATHE CO. 120 CULVERT ST. CINCINNATI, O.

The "Wolverine" Three Cylinder Gasoline Marine Engine.



Write for catalogue.

The only reversing and self-starting gasoline engine on the market. Lightest engine fo the power built. Practically no vibration. Absolutely safe. Single, double and triple marine and stationary motors from ¾ to 20 H. P.
WOLVERINE MOTOR WORKS, Grand Rapids, Mich.

Use any pen and your own stationery. If your stationer does not keep it, write for free specimen of work. Beware of infringements. Address Dept. L.
Pen-Carbon Manifold Co., 145-7-9 Centre St., New York.

Wire Cloth, Wire Lath, Electrically-Welded Wire Fabrics and Perforated Metal of all Kinds

Manufactured by
CLINTON WIRE CLOTH COMPANY, CLINTON, MASS.
BOSTON NEW YORK CHICAGO SAN FRANCISCO

GAS ENGINE IGNITERS

Price, $15.00

LATEST TYPE. BEST MADE

For Marine, Automobile or Stationary Engines. Fully Guaranteed. Write for Circular.
The Carlisle & Finch Co., 233 E. Clifton Ave., Cincinnati, Ohio

"CUSHMAN" CHUCKS



All styles and sizes.
Send for Catalogue.
THE CUSHMAN CHUCK CO., 189 Allyn St., Hartford, Conn.

THE MIETZ & WEISS KEROSENE and GAS ENGINE

Sizes from 1 to 60 H. P.
Send for Catalogue.

burns KEROSENE cheaper and safer than gasoline. Automatic, simple, reliable. No electric battery or flame used. Perfect regulation. Belted or directly coupled to dynamo for electric lighting, charging storage batteries, pumping and all power purposes.
A. MIETZ,
138-140 Mott St., New York.
ADOPTED BY U. S. GOVERNMENT.
Highest Award, direct coupled Generator Set, Paris Exposition, 1900.
Gold Medal, Pan-American Exposition, 1901. Gold Medal, Charleston, S. C., Exposition, 1902.

A Good Mixer



The absolute uniformity of the charges and the mechanical simplicity in the construction of the mixer on an
OLDS Gas & Gasoline Engine
is an important point for buyers to consider. Write for full information about all our stationary and portable engines.
Olds Motor Works,
216 River St., Lansing, Mich.

IT WILL PAY YOU TO KNOW US.

We build patterns for all kinds of machinery and architecture at reasonable rates. We have constructed a line of machinery for the accurate shaping and spacing of the teeth of all kinds of gear- rack and ratchet patterns. Superior to hand work and much cheaper. Booklet free.
BUFFALO GEAR & PATTERN WORKS, Buffalo, N. Y.

D. L. HOLDEN
REAL ESTATE TRUST BLDG. PHILA. PA.
SOLE MANUFACTURER
REGEALED ICE MACHINES

TRUSTWORTHY
Men and Women find
PROFITABLE EMPLOYMENT

Selling Aluminum Cooking Utensils. 100 different styles. Highest grade made. Cannot rust, crack or scale. Handsome as silver and 4 times lighter. Last a lifetime. Our new method makes work easy, pleasant and profitable. Best offer you ever had. Write to-day.

Aluminum Cooking Utensil Co.
District 5, Pittsburgh, Pa.

IT'S A HOUSEHOLD NECESSITY
The health of the family depends upon the purity of the drinking water supply. All germs are easily eliminated by the simple use of a
BERKEFELD FILTER
the water passing through Infusorial Earth which retains all germs and every atom of solid matter. Circulars free.
BERKEFELD FILTER CO.,
4 Cedar Street, New York.

H. L. F. THEBERT CO.
10, 20, 25 h. p. Engines for Automobiles and Launches, with transmission gear complete, with three speeds forward and one reverse, of the French type. Can be attached instantly without any extra connections.

Our Engine and Gears are same as the latest French production.

ROTARY ENGINES.—ARTICLES ON this type of engine, giving many details and illustrations, are contained in SUPPLEMENT Nos. 1158, 1186, 1193 and 1309. Price 10 cents each. For sale by Munn & Co. and all newsdealers.

...Upright Drills...
Complete line, ranging from our New Friction Disk Drill for light work to 6-inch Back Geared, Self Feed Drill. Send for Catalogue and Prices.
W. F. & JOHN BARNES CO.
(Established 1872)
1999 Ruby St., Rockford, Ill.

$5 FOR NOTHING.
We have paid that sum several times for new information that is published in our grand new book, "How to Make Money with Poultry and Incubators." 8x11 inches, 196 pages. It has 12 special chapters by the best experts in the country covering the entire poultry subject. Over 300 illustrations and photographic views of the Largest and Most Successful Poultry Plants in this and other countries. Tells about the CYPHERS INCUBATORS. It will be sent FREE POSTPAID for the next 30 days to all who mention this paper in writing. Address nearest office.

CYPHERS INCUBATOR COMPANY
Buffalo, N. Y. Chicago, Ill. Boston, Mass. New York, N. Y.

Howard Two and Four Cycle MARINE AND AUTOMOBILE MOTORS
Write for Cat.
Grant Ferris Co.
Troy, N. Y.



MORAN FLEXIBLE JOINT
for Steam, Air or Liquids.
Made in all sizes to stand any desired pressure.
Moran Flexible Steam Joint Co., Inc'd.
149 3d East St., LOUISVILLE, KY.

BARKER MOTORS
1 to 8 H. P., $80 to $220
Have more good points, fewer parts and require less attention in operation than any other.
Launches, Valves, Specialties.
C. L. Barker, Norwalk, Ct.

WORKS LIKE A CHARM.
Perfect satisfaction is experienced using our No. 5, 6 or 9 Hand Pipe Threading and Cutting Machines. Cranks or ratchet power. Gears housed from dust. Chasers set by graduation to any size, can be released from threading while in motion, opened to permit pipe being cut, and instantly closed.
Send for Free Catalogue to
The Merrell Manufacturing Co., 501 Curtiss Street, Toledo, Ohio.

A Handy Book To Have
Montgomery & Co.'s Tool Catalogue
It is illustrated throughout and describes and prices Tools. 704 pages, 6¾ x 9¼ ins. The latest edition, with discount sheet by mail for 25 cents.
MONTGOMERY & CO.,
105 Fulton St., New York City.

Made their mark Dixon's Pencils
Write for illustrated booklet W free.
JOSEPH DIXON CRUCIBLE CO.,
Jersey City, N. J.

Coin slot device, F. B. Hoffman	720,028
Coke, etc., apparatus for cooling, I. W. Pike	720,065
Commutator meter, J. F. Kelly	720,152
Compound expansion fluid engine, F., G. & R. Goodfellow	720,343
Concrete block mold, E. W. Seamans	270,536
Continuous press, J. Ingleby	720,150
Core anchor, sand, J. G. Emrich	720,011
Corn eradicator, J. B. Abler	720,311
Corn shock frame, H. H. Schenk	720,072
Corner post pocket, A. Christianson	720,222
Corset, L. Lawrence	720,363
Crane, high speed train staff, T. H. Patenell	720,059
Crate, folding, G. J. Cline	720,328
Crushing mill, H. U. Prindie	720,480
Culinary device, A. M. Stocking	720,293
Cultivator, Haiman & Murray	720,135
Cultivator, T. Hansen	720,247
Cultivator, lister, A. C. Lindgren	720,206
Cultivator, middle, M. A. Piper	720,060
Cultivator, tree, J. M. Collins	720,113
Current regulator, J. J. Wood	720,305
Currycomb, C. Lind	720,448
Curtain pole, Hunt & Russell	720,354
Curtain pole hanger, R. A. E. Reigard	720,069
Curtain pole, window, T. Hoffman	720,430
Cutter. See Twine cutter.	
Cutter guard, A. Lemmon	720,039
Cyanogen compound, producing, J. Bueb	720,402
Cycle propelling gear, D. E. Norton	720,278
Davit for ships, boat, N. Murchison	720,274
Deaf and blind mutes, communicating language for, J. Reese	720,068
Decoration, festoon, W. C. Lucas	720,367
Dental charcoal point L. Arndt	720,394
Dental impression cup, G. A. Brouillet	720,105
Die socket, C. A. Kenner	720,441
Display cabinet, J. H. Tracey	720,504
Display cabinet, hat, A. R. Du Boise	720,411
Display case, J. J. Donnelly	720,119
Display clamp, A. L. Young	720,389
Display counter, I. N. Landauer	720,036
Display package, P. R. Hazeltine	720,345
Distribution system, A. S. Hubbard	720,350, 720,351
Doffer, fiber machine, D. M. Sullivan	720,208
Door closer and check, A. J. Rosentreter	720,489
Door operating appliance, F. L. Brewer	720,399
Door or window, screen, L. H. Hixson	720,144
Draft equalizer, Lawrence & Vincent	720,037
Draft gear, hydraulic, P. H. Peterson	720,472
Draft hook, emergency, C. Wahl	720,198, 720,199
Draft rigging, H. T. Krakau, 720,526, 720,527,	720,529
Drill apparatus for drilling rock, mining, etc., Box & Sayer	720,319
Drill blank twisting machine, R. L. Barclay	720,988
Drill straightening machine, twist, R. L. Barclay	720,215
Driving band, G. Fouillaron	720,340
Dust arresting bag, J. S. Thurman	720,084
Dust catcher and blast heater, combined, Koch & MacDonald	720,257
Dyeing, increasing the fastness of indigo, A. J. Stiegelmann	720,501
Educational art text sheet, W. Seegmiller	720,187
Educational device, W. C. Williams	720,510
Egg or fruit case, W. Wilson	720,206
Elastic bands to articles of manufacture, machine for applying, M. Setter	720,493
Electric cable, R. F. Hall	720,023
Electric controller, R. W. Brown	719,991
Electric furnace, J. F. Hammond	720,024
Electric motor controller, O. Holz	720,029
Electric switch, B. N. Chamberlain	720,327
Electrical apparatus, apparatus for making coils for, E. L. Aiken	720,092
Electrical apparatus coil, E. L. Aiken	720,093
Electrical distribution, self regulating system of, A. S. Hubbard	720,352
Electrical knife switch clip, C. D. Platt	720,475
Electromedical apparatus, G. S. Rider	720,483
Elevator, A. B. Roney	720,487
Elevator brake attachment, G. W. Chamberlain	720,403
Elevator safety attachment, W. O. Day	720,332
End post pocket, A. Christianson	720,223
Engine speed regulator, explosive, L. A. Frayer	720,126
Engine vaporizer, gasoline, G. A. Ede	720,336
Engines, means for controlling fluid pressure, H. Swanton	720,299
Envelope opener, F. C. Muenchinger	720,049
Envelope, safety, G. W. Fletcher	720,413
Envelopes, papers, etc., holder for, A. Burson	720,109
Evaporating apparatus, O. M. Nilson	720,465
Evaporating pan, J. E. Burnett	720,323
Fastener, L. W. Luellen	720,451
Feed roll, G. A. Ensign, reissue	12,080
Feed water heater, I. Watts	720,200
Fence, portable, J. C. Simmons	720,077
Fertiliser distributor and corn planter, combined, L. C. Gillespie	720,420
Figure or show stand, adjustable, C. Dargie	720,231
Film washing and drying device, E. W. Newcomb	720,464
Fire and police alarm call system, W. J. Hofstatter	720,347
Fire escape and ladder, H. Bracklo	719,999
Fire escapes, life saving apparatus for use in connection with, J. Haswell	720,519
Fire extinguisher, automatic stationary, W. Esty	720,013
Fire extinguisher truck, R. M. Green	720,422
Fish hook, M. J. Amsden	720,392
Fish hook, W. G. Little	720,449
Fish hook releaser, J. Halligan	720,156
Fish skinning and scaling device, Kadletz & Fuller	720,439
Fishing reel side plate, J. E. Pflueger	720,063
Flower holder, F. W. Green	720,132
Flue stopper, J. L. Clark	719,997
Fluids, apparatus for electro endosmotically freeing materials from, B. Schwerin	720,186
Fly escape attachment for window screens, W. H. Spake	720,080
Fly killer stay, B. F. Douglass	720,334
Folding bench, W. A. E. Martin	720,044
Food products, preparing cereal, J. B. Espey	720,122
Frame. See Corn shock frame.	
Fruit pitter, O. L. Scott	720,288
Furnace, G. W. Lyon	720,370
Furnace apparatus, Foote & Robinson	720,125
Furniture, convertible, G. Brown	720,230
Fuse box, electric, T. Van Aller	720,087
Fuse head and fuse, electrical, Schmitt & Krannichfeldt	720,073
Game apparatus, G. E. Mellen	720,533
Garment hanger, A. F. Barnum	720,396
Gas burner, U. S. McCormick	720,375
Gas burner cap, incandescent, J. N. Webb	720,539
Gas generator, acetylene, J. K. Rush	720,180
Gas light fixture, incandescent, J. Hutchinson	720,433
Gas mixer, convertible, W. E. Guese	720,134
Gearing for centrifugal machines, G. M. Andersson	720,094
Gin saw sharpener, J. R. Garner	720,416
Glass, curvilinear corrugated prismatic, C. C. Hartung	720,139
Glass, curvilinear prismatic, C. C. Hartung	720,138
Glass making apparatus, sheet, Frink & Lee	720,517
Globe holder, B. M. Windoes	720,544
Golf game, indoor, H. H. Taylor	720,191
Governor, engine, O. Hove	720,432
Gravity, apparatus for demonstrating the laws of, J. S. Hemenway	720,426
Grinding and polishing machine, G. W. Wells	720,509
Guide wheel and guide, A. H. Mathesius	720,454
Guns, etc., apparatus for tempering parts of, A. H. Emery	720,337
Gyrating machine, G. W. Combs	720,114
Hair fastener, J. Erikson	720,515
Hammer handle safety fastening, F. Straub	720,297
Hammers, machine for manipulating automatic, C. B. McKibben	720,052
Harvester, J. F. Appleby	720,214
Harvester, corn, W. B. Koch	720,444
Harvester, grain, J. F. Appleby	720,096
Hat pin, J. A. Hamelback	720,423
Hatchway gate, Bayer & Wigan	720,216
Hay press, J. W. McNair	720,055
Hay tedder, S. B. Bamford	720,098
Heat bath, radiant, M. Joachimsoh	720,357
Heat distributor, A. Herig	720,346

(Continued on page 143)

The coat may not make the man, but a few coats of
Patton's SUN-PROOF Paint
make the house
Guaranteed to wear for five years.
PITTSBURGH PLATE GLASS CO., General Distributers. Send for Book of Paint Knowledge and Advice (free) to
Patton Paint Co., 287 Lake St., Milwaukee, Wis.

THE FRANKLIN DYNAMO
50 Watts, 10 Volts, 5 Amperes
3,000 to 4,000 revolutions. Sets of materials finished parts, complete machines. For amateur construction—very efficient. Will drive a dental engine, sewing machine or small lathe; run as a generator, will furnish current for six 6-candle lamps. Parts, $3.50, $6.00, $8.50. Complete, $12.50. Write for circular 9.
Parsell & Weed, 129-131 W. 31st St., N.Y.

THE 2½ H.P. WEBER JUNIOR PUMPER
has a capacity of 50 gallons 125 feet and 100 gallons 67 feet. Equals 30 men pumping water. All complete ready to attach to pump. Uses gasoline in proportion to water pumped. Weight 800 lbs. Engine speed 275 revolutions. Can be used for other power purposes. Simple, safe and economical. Outside dimensions, 9 ft. long, 3 ft. wide, 5 ft. high. Capacity, 25 gallons per minute 250 feet.
Weber Gas and Gasoline Engine Co., P. O. Box 1114a. Kansas City, Mo.



SPLITDORF SPARK COILS
25 VANDEWATER ST. N.Y.

MACHINES FOR ROLLING SCREW THREADS.
Any size up to 1" diameter, 3" long. Four sizes of machines.
Send for Catalogue.
BLAKE & JOHNSON,
P. O. Box 7. Waterbury, Conn.

A FOLDING CAMERA.—WORKING Drawings showing how to build a folding camera. A practical paper by an amateur for amateurs. 4 illustrations. Contained in SUPPLEMENT 1021. Price 10 cents. For Sale by Munn & Co. and all newsdealers.

WELL DRILLING Machines
Over 70 sizes and styles, for drilling either deep or shallow wells in any kind of soil or rock. Mounted on wheels or on skids. With engines or horse powers. Strong, simple and durable. Any mechanic can operate them easily. Send for catalog.
WILLIAMS BROS., Ithaca, N. Y.

There is never any question about the quality of a
B. F. BARNES UPRIGHT DRILL.
The tool here illustrated is our 20-inch Drill, and we guarantee it to drill up to 1 inch in steel and 1¼ inch in cast iron at a good gait and without strain. We build larger sizes and will be glad to send full data on our entire line to interested people.
B. F. BARNES CO., Rockford, Ill.

California
Information Free!
The Sacramento Valley
is picturesque, healthful and productive. No snow or ice, richest soil, abundant water, direct transportation everywhere, advantages of modern Sacramento City, local or Eastern markets and every inducement to settlers and investors. Produces Everything grown from New England to Florida. All products reach highest perfection and mature early. Write for official illustrated booklets containing California information to
General Manager Chamber of Commerce
75 J Street, Sacramento, Cal.

D. and J. SLEEVE HANGERS are Absolutely the BEST. WHY?
They are Mechanically Correct, Accurately Ground, Lightest, Nearest Dust and Water-Proof, Neatest in appearance, and they are used by the best Manufacturers and ridden by the best Professionals and Amateurs of America.
Park City Mfg. Co., Inc., Chicago.

THE "BEST" LIGHT
is a portable 100 candle power light, costing only 2 cents per week. Makes and burns its own gas. Brighter than electricity or acetylene and cheaper than Kerosene. No Dirt. No Grease. No Odor. Over 100 styles. Lighted instantly with a match. Every lamp warranted.
Agents Wanted Everywhere
THE "BEST" LIGHT CO.
87 E. 5th Street, CANTON, OHIO.



CRAMER
Crown Plates are more rapid than any other plate in the market With this plate clear quick printing Negatives can be secured
These plates are especially adapted for Tourists using Hand-Cameras

G. CRAMER DRY PLATE CO.
ST. LOUIS, MO.
Offices in
New York: 32 East 10th Street
Chicago: 1211 Masonic Temple
San Francisco: 819 Market Street

ACETYLENE GAS AND CARBIDE OF Calcium.—All about the new illuminant, its qualities chemistry, pressure of liquefaction, its probable future experiments performed with it. A most valuable series of articles, giving in complete form the particulars of this subject. Details of furnaces for making the carbide gas generators, gasometers, burners, etc. Contained in SCIENTIFIC AMERICAN SUPPLEMENT Nos. 998, 1004, 1007, 1012, 1014, 1015, 1016, 1022, 1035, 1038, 1057, 1064, 1071, 1072, 1082, 1083, 1084, 1085, 1086, 1104, 1124, 1138, 1149, 1150, 1203, 1204, 1206 and 1209. Price 10 cents each, by mail, from this office, and all newsdealers

California the Golden
Orchards and Lands in the Famous
Maywood Colonies
I can sell you at reasonable prices Orchards in bearing which will pay a good dividend the first year. Orange Orchards, Olive Orchards, Peach, Prune and Almond Orchards. Beautiful home sites, building lots, unimproved lands for planting. Write for booklet and detailed information to
C. F. FOSTER
Department C Corning, Cal.
Formerly of Foster & Woodson, owners and promoters of MAYWOOD COLONIES

KNOCKABOUT LAUNCH
$185.00 complete. 17 feet long. 2 h. p. gas engine. Complete in every detail. A handsome and practical outfit. Write for descriptive circular.
FRED MEDART
Yachts and Launches
3545 DeKalb St., St. Louis, Mo.
Send Stamp for Catalog

MATCH FACTORY.—DESCRIPTION of an English factory. SCIENTIFIC AMERICAN SUPPLEMENT 1113. Price 10 cents. For sale by Munn & Co. and all newsdealers.

ARTESIAN
Wells, Oil and Gas Wells drilled by contract to any depth from 50 to 3000 feet. We also manufacture and furnish everything required to drill and complete same. Portable Horse Power and Mounted Steam Drilling Machines for 100 to 1200 feet. Write us stating exactly what is required and send for illustrated catalogue. Address
PIERCE WELL ENGINEERING AND SUPPLY CO.
136 LIBERTY STREET, NEW YORK, U. S. A.

I-Beam Trolleys
Up to 10 tons capacity.
Cost Little to Install.
One Man Can Operate.
WAREHOUSES, SHOPS,
Of value anywhere.
Bulletin No. 12 M ready.
PAWLING & HARNISCHFEGER,
162 Clinton St., Milwaukee, Wis., U. S. A.

Patents, Trade Marks, COPYRIGHTS, etc.,
Address MUNN & CO., Solicitors of Patents.
Office of the SCIENTIFIC AMERICAN
361 Broadway, New York.
Branch Office: 625 F St., Washington, D.C.
Hand-book Sent Free on Application.

The Cadillac Runabout

The

Cadillac

The Automobile that Solves the Problem

Until the Cadillac was made, all automobile construction was more or less experimental. This machine is made on a new system developed from the experiences of all previous makers: the faults and weaknesses of the old methods have been avoided and a new ideal of motor travel developed that gives a perfect vehicle for comfort, speed, absolute safety, greatest durability, simplicity of operation, wide radius of travel, and reliability under all conditions of roads. You should not buy before examining this wonderful new machine. Price f. o. b. at factory, $750.

The new tonneau attachment, at an extra cost of $100, gives practically two motor vehicles in one, with a seating capacity of two or four, as required—a very graceful effect in either use. Write for illustrated booklet N.

CADILLAC AUTOMOBILE COMPANY,
Detroit, Mich.

With detachable tonneau

REVERSING STEAM TURBINE.—PARson's recently perfected turbine for boats. Illustrations showing details. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 1158. Price 10 cents, by mail, from this office, and from all newsdealers.

Setting Pointer to Zero

A Universal Rotary Pocket Measure

It is the **only** practical all-around measure ever made. Measures curves of all kinds as easily as straight work. **As simple as a rule.** In fact it is simply a revolving rule. A time and brain-saver that **is praised by all who know its merits.** Accurate, and anyone can use it. For detailed description, send for circular.

STECKENREITER MFG. CO.,
90 Lake St., Chicago, Ill.

EVANS VacuumCap

Will Make Hair Grow.

This appliance will massage the scalp, and force a healthful circulation. It will stop hair from falling out and restore a normal growth where live follicles exist. We refund the full purchase price if it does not give satisfaction within thirty days.

For full particulars address

EVANS VACUUM CAP CO.,
Fulleton Bldg. **St. Louis, Mo.**

I PRINT MY OWN CARDS

Circulars, newspaper. Press, $5. Larger size, $18.00. Money saver. Big profits printing for others. Type setting easy, rules sent. Write for catalog, presses, type, paper, etc., to factory. **The Press Co., Meriden, Conn.**

50 YEARS' EXPERIENCE

PATENTS

TRADE MARKS
DESIGNS
COPYRIGHTS &c.

Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. Handbook on Patents sent free. Oldest agency for securing patents.

Patents taken through Munn & Co. receive *special notice*, without charge, in the

Scientific American.

A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, $3 a year; four months, $1. Sold by all newsdealers.

MUNN & Co. 361 Broadway, **New York**
Branch Office, 625 F St., Washington, D. C.

Heating car for fruit or vegetables, etc., G. S. Jewett	720,435
Heel for footwear, safety, H. C. Karpenstein	720,440
Heel seating machine, spring, B. E. Morrison	720,171
Hinge, separable, R. G. Winter	720,304
Hinge, spring, W. J. Cowan	720,116
Hinge, spring, W. J. Keene	720,254
Holsting or lowering material, apparatus for, J. F. Cook	720,329
Horseshoe, C. Glaum	720,130
Horseshoe, W. M. Dickey	720,409
Horseshoe calk, detachable, A. Corcoran	720,115
Hose clamp, F. Straub	720,296
Hose reel attachment, automatic, J. H. Couch	720,228
Hose supporter, T. P. Taylor	720,193, 720,194
Hose supporter clamp, M. B. Hammond	720,244
Hotbed, W. S. Bodley	720,318
Hub, wheel, A. Schoth	720,185
Hydraulic apparatus, automatic, A. B. Lawther	720,162
Hydraulic machinery, apparatus for automatically regulating the supply of water under pressure to, L. Lacoin	720,261
Hydraulic power machine, G. W. Shem	720,494
Illuminating prism structure, F. L. O. Wadsworth	720,386
Insulator, H. R. Sargent	720,184
Iron. See Sad iron.	
Ironing table, L. O. Kelly	720,033
Knife, F. White	720,202
Knitting machine, H. Clarke	720,405
Knitting machine, Dodge & Rice	720,514
Knob attachment, B. W. Norton	720,056
Knockdown house, canvas covered, J. H. Hagedorn	720,344
Labeling machine, F. C. H. Strasburger	720,295
Lamp, electric arc, H. Baggett	720,312
Lamps, etc., globe holder for arc, J. J. Wood	720,306
Lantern, signal, Moore & Lewis	720,271
Lantern slide shifter, magic, T. S. Barbour	720,099
Lap robe or storm apron, roll, Keutscher & Auradou	720,260
Latch, door, C. P. & F. B. Howard	720,349
Ledger, bank, E. Ford	720,414
Level, R. W. Hodgins	720,145
Light rays, coloring screen for white, Schroeder & Lauffer	720,491
Lightning arrester, J. P. Coleman	720,226
Linotype machine, means for setting tabular matter in, T. Martin	720,270
Lithographic or other purposes, manufacturing artificial stones for, F. Heuber	720,142
Lock and latch, Rodney & Parkes	720,284
Lock and latch, combined, E. More	720,455
Locket, W. H. Blaney	720,317
Logs, means for raising sunken, B. H. Harris	720,137
Loom, automatic filling replenishing, E. S. Wood	720,209
Loom, multiple shuttle, L. E. Salisbury	720,181
Loom pick ball holder or guard, J. Blanchette	720,316
Loom, stopping mechanism, V. & E. Cunniff	720,117
Looms, knife sled motion for pile fabric, E. H. Ryon	720,285
Looms, tip support for automatic filling replenishing, E. S. Stimpson	720,189
Looms, weft feeler for replenishing, T. McAuliffe	720,457
Lowering persons or dead weights, apparatus for, A. Wyss-Baumgartner	720,310
Lubricating device for car axle journals, Harrison & Williams	720,026
Lubricating press, W. Michalk	720,047
Magnetic separator, J. Kirschweng	720,156
Mail bag holder, D. S. Baldwin	720,097
Mail box, rural delivery, M. S. Norton	720,279
Mandrel for conduit sections, R. W. Lyle	720,369
Mast, automatically lowering, C. Schwanebeck	720,074
Match safe, W. A. Patten	720,060
Matches, device for the ignition of slow, J. von der Bosch	720,104
Mattress filling, S. J. Stevenson	720,292
Measuring electric currents, means for, G. N. Eastman	720,335
Measuring vest, R. W. Grendon	720,019
Mechanical movement, J. E. Hausfeld	720,140
Medicinal battery, F. Grimshaw	720,020
Metal atomizing apparatus, W. H. Rowley	720,382
Metals, etc., compressing, W. Holzer	720,348
Metals from their ores, recovering and separating, H. A. Frasch	720,235
Milk jar protector, R. E. Gatter	720,341
Mine cage, D. F. Lepley	720,265
Mine ventilator, D. F. Lepley	720,264
Molding apparatus, E. Cross	720,408
Molding machine, R. Campbell	720,220
Monolithic construction, Lyon & Berle	720,165
Moth bag, self sealing, S. L. McMillan	720,461
Motive power engine, H. Paysan	720,470
Mowing machine, J. W. Latimer	720,262
Napping machine, H. S. Greene	720,018
Newspapers, etc., machine for folding, wrapping, addressing, and assorting, L. A. Agnew	720,212
Nut lock, B. Tucker	720,505
Oil burner, C. W. Sievert	720,495
Oil can, R. P. Hardy	720,424
Oil from seeds, apparatus for automatically extracting, A. B. Lawther	720,532
Ore separator, Emmons & Miller	720,338
Ores, reducing, M. Rothenburg	720,490
Pails, etc., attachment for, F. P. Mahon	720,041
Paper bags, manufacturing square bottom, W. A. Lorenz	720,366
Paper, device for holding loose or removable sheets of, R. G. Whitlock	720,548
Paper feeding apparatus, E. J. Hallberg	720,243
Paper feeding machine, Fuchs & Fisher	720,546
Paper, manufacture of, W. T. Armistead	719,982
Penholder, pen ejecting, B. B. Goldsmith	720,236
Perforating machine, J. W. Hedgepeth	720,425
Phonograph vibratory membrane, V. L. Garcia	720,127
Piano player tune sheets, perforation spacing device for automatic, A. S. Seville	720,075
Pick, mining, G. T. White	720,203
Pipe, apparatus for making butt weld, P. Patterson	720,061
Pipe, apparatus for the manufacture of butt weld, J. H. Matheson	720,046
Pipe connection, L. G. Collins	720,407
Pipe coupling seal lock, R. D. Tittle	720,196
Pipe covering, steam, S. W. Curtiss	720,003
Pipe joint, sheet metal, J. B. Wallace	720,538
Pipe, manufacture of butt weld, J. H. Matheson	720,045
Pipe wrench, G. O. Storle	720,385
Pipes with sand, mechanism for packing, C. R. McKibben	720,053
Pitman connection, J. L. Taylor	720,192
Placket closure, L. W. & S. M. Luellen	720,450
Planter, corn, H. P. Adams	720,211
Planter, corn, T. Adams	720,391
Platinum contact substances, regenerating, Krauss & Von Bernuth	720,361
Plow, C. R. Davis	720,118
Plow, W. T. Ellis	720,412
Plow attachment, E. Marsalis	720,453
Plow feeder, J. J. McMannon	720,173
Pneumatic despatch system terminal, Ash & Woltman	720,395
Pocket case, R. Oertel	720,467
Pole or post anchor, I. E. Clum	720,225
Pool table return ball attachment, P. Lapp	720,446
Portable bath, C. H. York	720,089
Post brace and anchor, J. H. Harbold	720,025
Potato digger, R. J. Thompson	720,503
Poultry or birds, self locking leg band for, C. C. Schild	720,286
Preserving device, T. L. Martin	720,043
Preserving jar, M. E. Perley	720,471
Preserving jar, vacuum, Giles & Gray	720,129
Printer's base and attachments, T. Wensel	720,387
Printer's base clamp, T. Wensel	720,388
Printing or other machines, sheet separating and feeding mechanism for, Fuchs & Fisher	720,547
Printing paper bags and wrapping paper, apparatus for, Purdin & Haskins	720,481
Printing press, G. H. Pierce	720,064
Printing press, C. R. Culley	720,331

(Continued on page 144)

"HENDRYX"



It's a Guarantee of Quality
2,000,000 Sold in 12 Years
EVERY REEL WARRANTED
Booklets mailed free
The Andrew B. Hendryx Co.
NEW HAVEN, CONN., U. S. A.

OIL--SMELTER--MINES
Dividend-Paying Mining, Oil and Smelter Stocks, Listed and Unlisted, our Specialty.
DOUGLAS, LACEY & CO.
Bankers & Brokers, Fiscal Agents.
Members N. Y. Consolidated Stock Exchange.
66 BROADWAY & 17 NEW ST., NEW YORK.
Booklets giving our successful plan for realizing the large interest and profits of legitimate mining, oil and smelter investments, sub. blanks, full particulars, etc., sent free on application.

The **SUN**



Typewriter No. 2
Built on standard principles with superior advantages.
A revelation in every feature, including
Price, $40.00
SUN TYPEWRITER COMPANY,
239 B'way, New York.

YOU ARE EASY
If you need a carpenter to help you repair your roof with
Warren's Natural Asphalt Stone Surfaced Roofing

Has 9 inch lap edge.

The best and most serviceable prepared roofing on the market. It is durable, fire-proof, and does not require painting. Comes ready to lay in rolls containing 108 sq. ft.
Warren Chemical & Mfg. Co., 172 Broadway, New York

Engineering Taught By Mail

Main Building, Armour Institute.

An opportunity to gain, at home, many of the educational advantages of a resident technical school

Instruction under Supervision of Members of Faculty of Armour Institute of Technology

Correspondence Courses in
Electrical, Mechanical, Locomotive, Stationary, Marine, Civil and Sanitary Engineering, Navigation, Architecture, Mechanical and Perspective Drawing, Sheet Metal Work, Textile Manufacturing. Also 40 Short Special Engineering Courses.

In addition to their regular instruction papers, students in Full Engineering Courses are furnished a Technical Reference Library (in ten volumes) as a help in their studies. Catalogue sent upon request.

American School of Correspondence
at
Armour Institute of Technology
Chicago, Illinois.

CONTROL OF FIRE.—VALUABLE PAper on fire extinguishment. SCIENTIFIC AMERICAN SUPPLEMENT 1134. Price 10 cents. For sale by Munn & Co. and all newsdealers.

KLIP-KLIP The Pocket Manicure

Trims, files, shapes and cleans, and keeps the nails in perfect condition. A complete manicure for man, woman or child. Silver steel, nickel-plated. Sent post paid on receipt of price if your dealer hasn't it. **25c**
KLIP-KLIP CO., 563 So. Clinton St. Rochester, N. Y.

For Men who Must Know

and must keep their facts up to date, in compact, convenient form, there is just one invaluable work :

17 Volumes — **THE NEW INTERNATIONAL ENCYCLOPÆDIA** — 15,000 Pages

EDITED BY

Harry Thurston Peck, Ph.D., L. H. D., Professor in Columbia University.

Daniel Coit Gilman, LL.D. President of Johns Hopkins University (1876–1902), President of Carnegie Institution.

Frank Moore Colby, M. A., Late Professor in New York University.

(Assisted by Nearly 200 Eminent Editors and Contributors)

You Ought to Know and Own

the only New Encyclopædia in English. New census figures, new inventions, new discoveries, new facts in the sciences and arts, new classification, abundant cross-references, the perfection of methods for convenience, the highest standard of accuracy. **New in its Entirety**

THEODORE HOUGH, Biological Dept. Massachusetts Institute of Technology, Boston, Mass., says:

"The NEW INTERNATIONAL is exactly what I have long desired in an encyclopædia, and I cannot say more in commendation of the work than that it gives exactly what it professes to give in the preface. In my own Department of Biology I can judge critically of the accuracy and comprehensiveness of its articles. They are all that can be desired in this respect."

Profusely Illustrated

Thousands of illustrations in the text, and hundreds of full-page plates in black-and-white and in colors, form an invaluable feature putting the NEW INTERNATIONAL on a par with the great German Encyclopædias. Maps showing latest data, statistical charts and tables, supplement the text fully.

Send For Sample Pages—FREE

Showing type, methods of treatment of the subjects specimen plates of maps, colored and plain, illustrations, names of contributors and describing our

Special Discount to Those Who Subscribe Now

with our Little-at-a-Time Payment Plan

DODD, MEAD & CO.,
372 FIFTH AVENUE
NEW YORK

SEND US THIS COUPON AT ONCE (OR A COPY OF IT).

DODD, MEAD & COMPANY New York

Please send, without cost to me, the sample pages of the

New International Encyclopædia

containing descriptions, sample pages, colored illustrations, maps and information regarding discount and little-payment plan for SCIENTIFIC AMERICAN readers.

Name.....

Post Office.....

State.....

Valuable Books!

REVISED and ENLARGED EDITION

The Scientific American

Cyclopedia Of Receipts, Notes and Queries.

15,000 Receipts. 734 Pages.

Price, $5.00 in Cloth. $6.00 in Sheep. $6.50 in Half Morocco. Post Free.

This work has been revised and enlarged,

900 New Formulas.

The work is so arranged as to be of use not only to the specialist, but to the general reader. It should have a place in every home and workshop. A circular containing full **Table of Contents** will be sent on application.

Those who already have the Cyclopedia may obtain the

1901 APPENDIX.

Price, bound in cloth, $1.00 postpaid.

DIES

THEIR CONSTRUCTION AND USE

For the Modern Working of Sheet Metals.

By JOSEPH V. WOODWORTH

Octavo. Cloth. Very Fully Illustrated.

Price $3.00 Postpaid.

This book is a complete treatise on the subject and the most comprehensive and exhaustive one in existence. A book written by a practical man for practical men, and one that no diemaker, machinist, toolmaker or metal-working mechanic can afford to be without.

Dies, press fixtures and devices from the simplest to the most intricate in modern use, are shown, and their construction and use described in a clear, practical manner, so that all grades of metal-working mechanics will be able to understand thoroughly how to design, construct and use them, for the production of the endless variety of sheet-metal articles now in daily use.

A Complete Electrical Library.

By PROF. T. O'CONOR SLOANE.

An inexpensive library of the best books on Electricity. Put up in a neat folding box, as shown in cut. For the student, the amateur, the workshop, the electrical engineer, schools and colleges. Comprising five books, as follows:

Arithmetic of Electricity 128 pages, ... $1.00

Electric Toy Making, 140 pages, ... $1.00

How to Become a Successful Electrician, 160 pages, ... $1.00

Standard Electrical Dictionary, 682 pages, $3.00

Electricity Simplified, 128 pages, ... $1.00

Five volumes, 1,300 pages and over 450 illustrations. A valuable and indispensable addition to every library.

Our Great Special Offer.—We will send prepaid the above five volumes, handsomely bound in blue cloth with silver lettering, and inclosed in a neat folding box, as shown in the illustration, at the **Special Reduced Price of $5.00** for the complete set. The regular price of the five volumes is $7.00.

JUST PUBLISHED

HARDENING, TEMPERING, ANNEALING and FORGING OF STEEL

By JOSEPH V. WOODWORTH

Author of "DIES, Their Construction and Use."

Octavo. 280 pages. 200 Illustrations. Bound in Cloth.

PRICE, $2.50

A new work from cover to cover, treating in a clear, concise manner all modern processes for the **Heating, Annealing, Forging, Welding, Hardening and Tempering** of steel, making it a book of great practical value to metal-working mechanics in general, with special directions for the successful hardening and tempering of all steel tools used in the arts, including milling cutters, taps, thread dies, reamers, both solid and shell, hollow mills, punches and dies, and all kinds of sheet metal working tools, shear blades, saws, fine cutlery, and metal cutting tools of all description, as well as for all implements of steel, both large and small. In this work the simplest and most satisfactory hardening and tempering processes are given.

READY MARCH 1st, 1903.

Modern Machine Shop Tools

Their Construction, Operation and Manipulation, Including Both Hand and Machine Tools.

By W. H. VANDERVOORT, M. E.

Large 8vo. 576 Pages. 675 Illustrations. Bound in Cloth.

Price $4.00.

An entirely new and fully illustrated work, treating the subject of **Modern Machine Shop Tools** in a concise and comprehensive manner. Special care has been taken to eliminate all matter not strictly pertaining to the subject, thus making it possible to give the reader complete information pertaining to machine shop tools and methods in a single volume at a moderate price.

The work is logically arranged; the various hand and machine tools being grouped into classes, and description of each is given in proportion to their relative importance. The illustrations represent the very latest tools and methods, all of which are clearly described. Each tool is considered from the following points:

FIRST—Its construction, with hints as to its manufacture.

SECOND—Its operation, proper manipulation and care.

THIRD—Numerous examples of work performed.

☞ *Full descriptive circulars of above books will be mailed free upon application.*

MUNN & CO., Publishers, 361 BROADWAY NEW YORK.

Printing press sheet delivery mechanism, W. S. Huson	720,355
Projectile, armor piercing, R. A. Hadfield	720,242
Projectile fuse, G. E. Fiedler	720,339
Propelling mechanism, boat, D. E. Norton	720,534
Pulp digester lining, S. A. Leavitt	720,038
Pulping machine, F. I. du Pont	720,379
Pump, H. M. Chase	720,112
Pump lubricator, G. B. Essex	720,516
Pump, oil, C. W. Enos	720,121
Pump, oil, C. Hirsch	720,251
Pump operating device, C. E. Burkholder	720,322
Punch, O. D. Woodbury	720,309
Rail joint, J. Kelly	720,358
Rail joint, C. A. Snider	720,498
Railway, electric, F. M. Ashley....719,983	719,984
Railway, electric, Murray & Van Vleck	720,273
Railway fusee projector, W. C. Beckwith	720,397
Railway rail stay, Laas & Spoonenburg	720,362
Railway switch, W. Quintal	720,067
Railway switch, A. Youngblood	720,090
Railways, mechanism for removing ice and snow from the conducting or third rail of electric, F. V. Winters	720,208
Range finder attachment, R. J. Sheehy	720,076
Ratchet wrench, J. W. Muskett	720,373
Razor, safety, G. W. Korn	720,360
Register. See Cash register.	
Rein support, J. S. Jones	720,438
Renovator, pneumatic, J. S. Thurman	720,083
Ribbon holder, G. P. Schmidt	720,287
Ribbon winder, W. A. Hayes	720,141
Rolling mill feed mechanism, S. V. Huber	720,353
Roofing, metallic, G. Huth	720,030
Rotary engine, R. B. Chrilton	719,996
Rotary engine, F. J. Bliss	720,102
Rotary engine, J. W. & R. M. Anderson	720,393
Rotary engine, J. L. McMillan	720,469
Rotary engine, J. C. Wharton	720,542
Rubber, machine for coating fabric with, J. H. Pearce	720,281
Running gear, C. W. Petro	720,177
Sad iron, E. J. Hansen	720,518
Saddle for harness, auxiliary, H. Rittel	720,178
Safe protecting means, G. W. Craig	720,330
Safety pin, R. P. Brown	720,106
Salt grainer, H. L. Hildreth	720,143
Salting machine, automatic, J. W. Gheen	720,128
Sash fastener, G. Simpson	720,496
Sash lock, automatic, A. W. Adams	719,981
Sash, reversible window, P. E. Lorve	720,164
Sausage stuffer and lard or jelly press, combined, M. J. Vogler	720,301
Saw, R. H. Benner	720,313
Saw set, G. Mossholder	720,172
Scenographic apparatus, E. J. Austen	719,986
Scraper, chopper, and cultivator, combined cotton, L. D. Moore	720,272
Scraper, soil, G. N. Perry	720,176
Screw cap, A. R. Pritchard	720,380
Secondary battery, F. Buchanan	720,321
Self heating can for canned goods, G. S. Jewett	720,434
Shearing machine, C. M. Palmer	720,469
Ship's log apparatus, electrical, T. F. & T. S. Walker	720,508
Shirt bosom, C. L. & L. B. Kretschmar	720,190
Shoal water indicator, F. E. Forster	720,015
Shock loader, J. B. Schuman	720,383
Shoe paste applier, W. B. Smith	720,079
Shovel attachment, W. T. Spillane	720,500
Show case, C. F. Kade	720,032
Show case, R. Manchs	720,452
Shutter fastener, E. F. McIntyre	720,459
Signaling apparatus and system, E. E. Clement	719,999
Silo, E. W. Gilbert	720,419
Skirt fastener, D. J. Hauptman	720,250
Skirt waistband, M. A. Ormsbee	720,468
Slack adjuster, F. K. Howard	720,147
Smoke consuming apparatus, furnace, W. C. Courts	720,229
Snap hook, A. L. Hines	720,429
Snap hook, double safety, J. S. Mugg	720,050
Snap hook, swivel, S. Phillips	720,378
Soap manufacturing apparatus, J. Schweckler	720,535
Soles and heels of boots or shoes, wheel for smoothing the edges of, P. Duplessis	720,009
Solidifying and excavating the soil and constructing tunnels, C. Sooysmith	720,384
Speaking tube mouthpiece, W. Cartwright	720,110
Speech receiver or transmitter guard, S. J. Ballard	719,987
Spinning frame, ring, C. E. Lovejoy	720,268
Spring for furniture, etc., W. Bursch	720,108
Sprocket wheel, C. C. Keyser	720,442
Square head, T. H. A. Rounds	720,179
Stack knife, J. O. Byro	719,992
Stacker, pneumatic straw, Robby & Rumely	720,486
Stamp mill, W. S. McKinney	720,054
Starching machine, L. Hoffmann	720,146
Stave cutting machine, F. T. Brown	720,400
Steam, apparatus for measuring the flow of, J. Seidener	720,188
Steam boiler, G. A. Kennedy	720,153
Steam boiler, sectional, P. Wiedenfeld	720,265
Steam engine, D. F. Lepley	720,263
Steam or other pressure chambers, means for closing, P. Kirgeis	720,155
Steam trap, E. A. Adams	720,091
Steam trap, R. H. Thorpe	720,195
Sterilizer, R. Kay	720,159
Sterilizer door, J. Brucker	720,107
Sterilizing case for pocket thermometers, O. H. Elbrecht	720,234
Stopper. See Flue stopper.	
Stove, blue flame oil, G. W. Ferdon	720,123
Stove gas burner, C. F. Wilson	720,303
Stove, lamp, C. R. Sandvig	720,182
Stove plate, L. W. Brown	720,401
Strainer, W. Lewinski	720,365
Street sweeper, D. Fike	720,474
Stropper, automatic, A. C. Gaynor	720,417
Suspenders, H. C. Hine.....720,521,	720,522
Swing attachment, G. S. Kerr	720,034
Switch device, L. Horinko	720,523
Syringe, hot air, J. I. Richards	720,071
Syringe, hypodermic, J. N. Ranger	720,381
Tannin extracts, making decolorized, G. Klenk	720,157
Teaching the golf swing, device for, S. Clifford	720,406
Telegraph receiving tape, chemical, P. B. Delany	720,233
Telegraphy, P. B. Delany	720,004
Telephone protecting device, G. R. Bonham	720,103
Telephone system, E. E. Clement	719,998
Telephone transmitter, F. S. Tucker	720,085
Telburian, E. P. Gram	720,017
Tent, portable pleasure, C. U. Krieg, Sr.	720,445
Thill coupling, E. Atterby	719,985
Thill coupling, A. Paul	720,280
Threshing machine conveyor, J. R. Harrison	720,249
Tire tightener, McMaster & Kean	720,174
Tobacco cartridge, E. G. Dexter	720,007
Tobacco press, H. Nestestu	720,463
Tool, combination, T. D. Miller	720,168
Torpedo for submarine mines, F. Baudoin	720,101
Toy gun, J. B. Popenhagen	720,478
Track brake, H. D. Deshler	720,005
Train staff systems, ring and pouch for high speed, T. H. Patenall	720,057
Trammel, C. M. Van Horn	720,507
Transplanting machine, vegetable, J. H. Carroll	719,995
Traveling table, continuous, J. Ingleby	720,149
Trolley and brake for aerial railways, M. J. Doner	720,333
Truck bolster, G. H. Goodell	720,239
Turbine, compound steam, H. F. Fullagar	720,415
Twine cutter, Knowles & Dickson	720,158
Type, M. F. Benton	720,314
Typewriter carriage, L. S. Burridge	720,219
Typewriter platen, C. E. Peterson	720,062
Typewriting machine, G. B. Webb	720,202
Typewriting machine, F. W. Hillard	720,520
Umbrella rib and stretcher joint, A. S. Venen	720,537
Undercut gate, F. V. Hetzel	720,428
Valve, W. J. Poole	720,477
Valve, antifreezing compression, P. Haas	720,022
Valve arrangement for locomotive or other engines, relief, A. Spencer	720,499
Valve, check, W. B. M. Bashlin	720,100
Valve, pressure controlling, A. S. Comstock	720,000

(Continued on page 145)

WATERLESS KNOX

1903 Model now ready, with many new and desirable features. Wood Wheels, 34-in Double Tube Tires, Longer Wheel Base, More Powerful Air-Cooled Engine, Wider and More Comfortable Folding Front Seat easily carrying two adults. Price **$1,200.**

RECORD FOR 1902

Won two of the four cups in the New York-Boston Reliability Contest. Perfect records in all the other contests. Three hundred satisfied customers in all parts of the country, testifying to the great success of our air-cooled motor and the many other features used exclusively on this car.

Send for Catalog and Testimonials.

Will Exhibit at the New York and Chicago Shows.

KNOX AUTOMOBILE CO., Springfield, Mass.

NEW YORK OFFICE, 152 West 38th St.

WESTERN AGENCY, National Automobile & Manufacturers Co., 26 Fremont St., San Francisco, Cal.

A BOON IN BRAKE BLOCKS.

The acknowledged leader in its line is **Potter's Spring Brake Block** for efficiency, durability, economy, strength and serviceability. In use by builders of the highest grade carriages and wagons. **Morgan Potter,** Fishkill-on-Hudson, N. Y., U. S. A.

Quality-Simplicity-Practicability

These are the three important points studied in the manufacture of the widely celebrated

CRESCENT SAFETY RAZOR

The quality is assured from the fact that the blade is forged from the finest English Razor Steel, tempered by an improved process. The simplicity is shown in the case with which the blade can be adjusted for shaving or stropping. The practability is that every part is interchangeable and extra blades are guaranteed to fit. Sample by registered mail for $1.25.

SOUTHINGTON CUTLERY CO., Southington, Ct., U. S. A.

FAY & BOWEN Motors & Launches

THE FAY & BOWEN MARINE MOTOR

is a revelation to those who have used others. Reliable, safe, durable and easy to operate. Remarkable speed control. Best of all, it starts when you start it. No handle or crank is used. Our patented igniter is absolutely unique and always instant and positive in action. It is really the only perfect and satisfactory igniter.

Motors complete from 1½ to 25 h. p. ready for installation. We also build handsome launches with motors installed and ready to run. SEND FOR CATALOGUE.

FAY & BOWEN, 85 Mill St., Auburn, N. Y.

•200 Egg Incubator For $12.80

The simplest, most perfect incubator made in the world. This is a new one at a remarkably low price. It is an enlargement of the famous

WOODEN HEN

and made as thoroughly good as any incubator on the market. It will hatch every fertile egg, and stand up to regular usage as well as the most costly.

Write for free catalogue with 14 colored views.

GEO. H. STAHL, Quincy, Ill.

The New.. Conrad Gasoline Automobiles

will first appear at

New York Automobile Show, January 17 to 24, at Madison Square Garden,

and at

Chicago Automobile Show, February 14 to 21, at Coliseum Building.

The CONRAD MOTOR CARRIAGE CO. 1411 Niagara St., Buffalo, N. Y.

A Good Boiler

Means satisfaction in running a steam Automobile. For Quality, Workmanship and Efficiency they are unequaled. Boilers for heavy trucks a specialty. Get our Catalog.

Steam Carriage Boiler Co. 119 W. 1st St., Oswego, N. Y.

$200,000

7% FIRST LIEN PREFERRED STOCK

Magnolia Metal Co.

Subject to Prior Sale

Preferred as to Assets. Cumulative as to Dividends. Dividends payable semi-annually, April 1st and October 1st.

Common Stock, $1,000,000—Shares $100 each.

First Lien Preferred Stock, $200,000—Shares $100 each. Full Paid and Non-Assessable.

Two Thousand Shares of Preferred Stock Offered at Par

FAC-SIMILE BAR OF MAGNOLIA METAL

This stock is being issued for the purpose of increasing the working capital, and thereby enabling the company to extend its business and largely increase its profits.

The business was established in 1886 and has steadily grown during the last sixteen years, until now it has assumed very large proportions, and enjoys a large trade throughout North and South America; with offices and factories at New York, Chicago, Montreal, New Orleans and San Francisco; branch offices at Boston, Philadelphia and Pittsburg; agencies at all principal distributing points; besides a large corps of traveling men.

For a number of years the business was confined almost entirely to the manufacture and sale of Magnolia Anti-Friction Metal, a specialty well known to the mechanical world, and largely used by railroads, steamship lines, iron and steel mills, and manufacturing concerns of all classes. During the past two years the company has added to its output other grades of babbitt metals, as well as white metals of every description, including solders, type metals, casting metals, etc., etc., for which the demand is enormous.

The Magnolia Metal Company owns valuable patents, and its trade-mark rights cover all of North and South America, and average net earnings of the business during the past five years have been largely in excess of the sum required to pay dividends on this issue of Preferred Stock.

Full particulars, including Prospectus and Report of Chartered Accountant, on application. Address all communications and make checks payable to

Magnolia Metal Co., Executive Offices, 511 West 13th Street, New York City.

Boston, Chicago, Pittsburgh, Buffalo, Philadelphia, Montreal, New Orleans, San Francisco.

Langbein's Splendid Book on the Electro-Deposition of Metals.

The Best on the Subject in the Language.

FOURTH REVISED AND ENLARGED EDITION.

RECENTLY (1902) PUBLISHED.

A COMPLETE TREATISE ON

The Electro-Deposition of Metals.

Comprising Electro-Plating and Galvanoplastic Operations, the Deposition of Metals by the Contact and Immersion Processes, the Coloring of Metals, the Methods of Grinding and Polishing, as well as Descriptions of the Electric Elements, Dynamo-Electric Machines, Thermopiles, and the Materials and Processes used in every Department of the Art. From the German of Dr. George Langbein. With additions by William T. Brannt, editor of "The Techno-Chemical Receipt Book." Fourth edition, thoroughly revised and much enlarged. Illustrated by 109 engravings, 8vo, 500 pages.

Price $4.00, free of postage to any address in the world; or By express C. O. D. to any address in the United States, free of freight, $4.00.

A circular of 8 pages quarto, giving the full Table of Contents of this splendid book, with specimens of the illustrations, will be sent free of postage to any one in any part of the world who will furnish us with his address.

HENRY CAREY BAIRD & CO.,
INDUSTRIAL PUBLISHERS, BOOKSELLERS & IMPORTERS,
810 Walnut St., Philadelphia, Pa., U. S. A.

ELECTRICAL ENGINEERING TAUGHT BY MAIL.

Write for our Free Illustrated Book.
"CAN I BECOME AN ELECTRICAL ENGINEER?"

We teach Electrical Engineering, Electric Lighting, Electric Railways, Mechanical Engineering, Steam Engineering, Mechanical Drawing, at your home by mail. Institute indorsed by Thos. A. Edison and others.
ELECTRICAL ENGINEER INSTITUTE,
Dept. A, 240-242 W. 23d St., New York.

LEARN PROOFREADING.

If you possess a fair education, why not utilize it at a genteel and uncrowded profession paying $15 to $35 weekly? Situations always obtainable. We are the original instructors by mail.
HOME CORRESPONDENCE SCHOOL, Philadelphia

AN ENGINEER'S LIBRARY.

An absolute Encyclopædia for Engineers or for Steam Users, Electricians, Firemen and Machinists, is the

HANDBOOK ON ENGINEERING.

By HENRY C. TULLEY.

Third edition, enlarged and revised, 5,000 copies, now ready. Sent anywhere on receipt of price, $5.50—money back if dissatisfied. 900 pages. 400 fine illustrations. Thoroughly reliable and practical. Handsomely bound in leather and gilt. Pocket-book form.

H. C. TULLEY & CO.,
1060 Wainwright Bldg., St. Louis, Mo., U. S. A.

STUDY ELECTRICITY $1.50

by an effective and cheap method. I give you 387 pages of studies, 95 diagrams and illustrations, 20 tables and complete system of questions and answers. All bound in book form for $1.50. Complete course giving you a practical working knowledge of electricity in all its branches. Remit today.
THE ACME PUBLISHER, S. 1018, 153 La Salle St., Chicago.

Hang Your Electric Light on a

Two Balls Adjuster

and place it or take it just where you want it. Raise and lower your light at will—all with automatic adjustment. For full description send for our Pamphlet No. 30.

THE VOUGHT-BERGER COMPANY,
La Crosse, Wis.

Squabs Pay Beat Hens

Easier, need attention only part of time, bring big prices. Raised in one month. Attractive for poultrymen, farmers, women. Send for **FREE BOOKLET** and learn this *immensely rich home industry.*

Plymouth Rock Squab Co., 14 Friend St., Boston, Mass.

POWER AIR PUMP FOR STEAM CARRIAGES
MALTBY
ADDRESS No. 11 CLINTON ST. BROOKLYN, N.Y.

Scientific American Building Monthly

NEW VOLUME NOW READY

VOL. 34—JULY to DECEMBER, 1902

A Monthly Magazine of Domestic Architecture
Sumptuously Illustrated

275 Illustrations Six Covers in Tint 146 Pages
Bound in Boards Price, $2.00 prepaid by mail

The Thirty-fourth Volume of the SCIENTIFIC AMERICAN BUILDING MONTHLY more than maintains the high standard established by this valuable Magazine. Its "Talks with Architects"—contributions by the leading architects of the day; its editorial discussions of important subjects relating to domestic architecture; and its many specialized Departments make it the most useful and most valuable publication of its kind.

TALKS WITH ARCHITECTS

"A Talk on House Fittings," by a sanitary expert. Mr. Frederick S. Lamb on "Municipal Art." Mr. F. Wellington Ruc stuhl on "Sculpture for the Home." Mr. Charles M. Lehean on "Opportunities for Decorative Art." Mr. William Martin Aiken on the "City Architect." Mr. Percy Griffen on "Small Houses."

EDITORIAL ARTICLES

"Cheap Houses." "Walls and Wall Treatment." "The Arts and the House." "The Country House." "How the Architect Helps the Home." "How the Householder Helps the House."

DEPARTMENTS

"The Garden." "The Household." "Sanitation." "Stable Lore." "The City House." "Civic Betterment." "Country Life." "The Flat." "Fire Protection." "The Country House." "Housing Problems." "Heating Talk." "Furniture." "House Suggestions." "Wall Papers." "The Kitchen." "New Books." "Legal Notes." "New Building Patents." "Publishers' Department."

The SCIENTIFIC AMERICAN BUILDING MONTHLY contains each month photographs and plans of dwelling houses, gardens, country estates and buildings of moderate price, together with a cover beautifully printed in tint. The illustrations are all made from photographs taken expressly for the Magazine and are printed with every advantage of the printer's art. The plans which accompany most of the illustrations present a complete synopsis of each subject and are a unique feature of this valuable Magazine. Careful and concise descriptions accompany each illustration. The illustrations include photographs of exteriors, interiors and details, views of gardens and ornamental adjuncts to the house. No expense is spared to make this Magazine the leading periodical of its class and of the utmost practical value to its readers.

For Sale by
MUNN & CO., 361 B'way, New York City
and all newsdealers

Valve, pressure relief, J. Nageldinger		720,375
Valve, straightway, E. M. Erdman		720,012
Vault, portable burial, B. F. Lockwood		720,163
Vehicle controlling gear, motor, J. Q. Chase		720,404
Vehicle, motor, C. L. Haase, Jr.		720,241
Vehicle wheel, R. E. Jeffery		720,253
Vehicles, adjustable seat for two-wheeled, A. Johnston		720,524
Ventilator. See Mine ventilator.		
Vermin destroyer, J. M. Phillips		720,282
Vessel, metallic shipping, Nelson & Christianson		720,277
View outfit, R. E. Whiting		720,204
Wagon, dumping, E. M. Sandy		720,183
Washboard attachment, D. E. Van Gilder		720,506
Watch, stem winding and setting, C. Kuenzel	720,258,	720,259
Water closet, P. Haas		720,021
Water gate, W. D. Wilson		720,207
Water heater, D. E. Smoak		720,497
Water tank mold, P. Mannan		720,371
Water tube boiler, W. M. Jackson		720,350
Weigher, automatic, J. R. Harrison		720,248
Weighing machine, J. Marshall		720,042
Weighing or packaging machine, W. H. Doble		720,008
Welding compounds, manufacturing, P. Verviact		720,300
Well fishing implement, oil, Smith & Piggott		720,078
Wheel, C. Miller		720,048
Winding drum, collapsible, A. C. Mills		720,169
Windlass and winch, combined, H. D. Van Doorn		720,197
Windmill, J. Henderson		720,427
Windmill regulator, M. E. Lawrence		720,161
Window fastener, McVoy & Sullivan		720,462
Window screen, D. G. Elges		720,120
Windows, etc., protector for, J. N. Ferguson		720,124
Wire working machine, A. C. Mills		720,170
Wood splitting device, G. Elden		720,010
Wrench, N. Larsen		720,530
Wrist plate lock, H. Weber		720,540
X-ray tubes, automatic regulator for, W. S. Andrews		720,095

DESIGNS.

Bottle, F. Schilling	36,226,	36,227
Brushes, etc., back for, O. Leigh		36,222
Brushes, etc., back for, Dickinson & Leigh		36,223
Button hooks, etc., handle for, O. Leigh		36,221
Chair, rocking, E. L. Brown		36,224
Spoons, etc., handle for, Crees & Court		36,220
Vehicle body, A. L. Riker		36,225

TRADE MARKS.

Baking powders, acid ingredients for, Layton Pure Food Co.	39,779
Boots, shoes, and slippers, leather, C. M. Clapp Co.	39,758
Boots, shoes, and slippers, leather, J. W. Gibbs	39,759
Chemical compounds for certain named purposes, O. Porach Chemical Co.	39,765
Chemical substance, effervescent, Alfred Bishop, Limited	37,776, 39,777
Electric light support, F. H. Stewart	39,786
Eyeglass and spectacle frames or mountings, American Optical Co.	39,751
Food, certain named breakfast, B. Macfadden	39,781
Food, flaked wheat, Hygienic Food Co.	39,780
Glass surfaces against the action of vapors or moisture, plastic composition for shielding, W. P. Gush	39,764
Gloves, J. A. Wolf	39,755
Leather and boots and shoes, certain named preparations for use on, Whittemore Bros. & Co.	39,761
Leather, tanned, Leas & McVitty	39,760
Liniment, J. Lauro	39,770
Lotions, creams, cosmetics, and pastes, M. E. Hinchman	39,776
Medicine for cure of certain named diseases, J. A. Christiansen	39,772
Medicines for external treatment of diseases and irritations of skin, scalp, and face, M. M. Harris	39,769
Metallic plates, American Pressed Steel Co.	39,796
Mineral waters and crystallized mineral waters, Kaiola Company	39,784
Mowers, lawn, Supplee Hardware Co.	39,797
Mushroom relish or sauce, table, G. L. Jacquin	39,778
Oils and seed products, seed, Proctor & Gamble Co.	39,763
Oils, cacao, Rocca, Tassy & De Roux	39,762
Pajamas and night robes, Janowitz-Maxwell Co.	39,752 39,753
Pianos, automatic piano players, attachments and parts, Wulschner Music Co.	39,793
Pipe covering, certain named, Chicago Fire Proof Covering Co.	39,795
Powders, face, J. F. Koelling	39,777
Razors, J. H. Becker	39,787
Razors, H. Boker & Co.	39,788
Razors, S. Rahalm & Co.	39,789
Remedy for certain named diseases, Ricord Mfg. Co.	39,774
Remedy, rheumatic, F. W. Fletcher	39,773
Ribbons, E. & H. Levy	39,756
Roofing felt and roofing paper, Flintkote Manufacturing Co.	39,785
Salves, liniments, tonics, and bowel regulating medicines, Dr. Blair Medical Co.	39,768
Sewing machines and sewing machine attachments and parts thereof, Singer Manufacturing Co.	39,791
Shirts, collars, and cuffs, Bloch & Neuburger	39,754
Silk, spun, Industrie-Gesellschaft fur Schappe	39,757
Starch, laundry, Keever Starch Mnfg. Co.	39,782
Steel, tool, Crucible Steel Company of America	39,792
Stomach, bladder, and kidney cures, Columbia Drug Co.	39,775
Stoves, C. Schmidt	39,790
Telephonic apparatus, Electric Gas Lighting Co.	37,794
Tonic, blood, L. H. Harris	39,798
Vaccine virus, N. Crank	39,771
Water, potable, F. G. Kune	39,783

LABELS.

"Brownsville Fruit Distilling Co.," for brandy, Brownsville Fruit Distilling Co.	9,737
"Cennum," for a medicine, A. E. Poulsen	9,740
"Chere-Amie," for a medicine, Associated Drug Co.	9,471
"Emile Zola," for cigars, W. Kauder	9,736
"Golden Dwarf Celery Tonic," for tonic, D. Bahr	9,738
"La Grata," for cigars, S. C. Herbst Importing Co.	9,735
"Mercerized Paint," for paints, J. J. Pearson	9,745
"Scheetz's Celebrated Bitter Cordial," for a medicine, P. E. Heintz & Co.	9,739
"The Calendar Broom," for brooms, L. D. Lawrence	9,732
"Tri-Avena," for prepared food, Tri-Avena Meat Co.	9,733
"Union Central," for cigars, Central Cigar Mfg. Co.	9,734
"Witch Hazel (Gould)," for witch hazel, Gould Witch Hazel Co.	9,742

PRINTS.

"Men's Apparel," for clothing, Cahn, Wampold & Co.	614
"Purity Did It," for beer, A. von Cotzhausen.	615

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address Munn & Co., 361 Broadway, New York.

THE HARRINGTON AND KING PERFORATING CO.

PERFORATED METALS

OF EVERY DESCRIPTION AND FOR ALL PURPOSES
FOR SCREENS OF ALL KINDS

No. 223 NORTH UNION ST. CHICAGO, ILL. U. S. A.

STALL'S BOOKS

DR. STALL

A Man with a Message

Millions of people always await the man with a real message. Dr. Stall has found it so. His books are already circulated in every land.

275th thousand in English.

They are being translated into several languages in Europe and two in Asia.

THE SELF AND SEX SERIES

has the unqualified endorsement of

Dr. Joseph Cook — **Bishop Vincent**
Rev. C. M. Sheldon — **Anthony Comstock**
Rev. F. B. Meyer — **"Pansy"**
Dr. Theodore L. Cuyler — **Frances E. Willard**
Dr. Francis E. Clark — **Lady H. Somerset**
Eminent physicians and hundreds of others.

4 BOOKS TO MEN. By Sylvanus Stall, D.D.
WHAT A YOUNG BOY OUGHT TO KNOW.
WHAT A YOUNG MAN OUGHT TO KNOW.
WHAT A YOUNG HUSBAND OUGHT TO KNOW.
WHAT A MAN OF 45 OUGHT TO KNOW.

4 BOOKS TO WOMEN. By Mrs. Mary Wood-Allen, M.D., and Mrs. Emma F. A. Drake, M.D.
WHAT A YOUNG GIRL OUGHT TO KNOW.
WHAT A YOUNG WOMAN OUGHT TO KNOW.
WHAT A YOUNG WIFE OUGHT TO KNOW.
WHAT A WOMAN OF 45 OUGHT TO KNOW.

$1 per copy, post free. Send for table of contents.

Vir Publishing Co. 1148 Real Estate Trust Building, Philadelphia

THE BRIGHT WHITE LIGHT FOR MAGIC LANTERNS

Also for Bromide Enlarging, Copying, Photo-Engraving. Intensely brilliant, very portable, burns kerosene, costs 1 cent per hour. Send for copy Franklin Institute award and lists of Stereopticons, Moving Pictures and Slides.

WILLIAMS, BROWN & EARLE,
Dept. 6, 918 Chestnut St., Philadelphia.

COLD GALVANIZING

Save all the Spelter consumed in galvanizing by the hot process by using our Patent Cold Galvanizing Process, as the amount of spelter lost as dross in the hot process if used in our process will give sufficient protection to any kind of work to make it rust-proof even against salt air and sea water. Our Patent Process is now in use all over the country. Our licensees include **U. S. Government, The Standard Oil Co., Herreshoff Boat Building Co., Townsend & Downey, Armour Packing Co.** Licenses granted on royalty basis, sample and custom work done at our factory, 108-110 W. 11th St. Main Office, 346 Broadway. **U. S. ELECTRO-GALVANIZING CO.**

Mathematicians Wanted

The profession of actuaryship offers a splendid field for those possessing mathematical ability, as positions command $4,000 a year and over. Our course is prepared by leading actuaries and is under their supervision.

Address

HOME CORRESPONDENCE SCHOOL
416 Walnut St., Philadelphia, Pa.

SECTORLESS WIMSHURST MACHINE.—This article gives directions for making. 4 illustrations. SCIENTIFIC AMERICAN SUPPLEMENT 1131. Price 10 cents. For sale by Munn & Co. and all newsdealers. Send for new catalogue.

MODELS & EXPERIMENTAL WORK. Inventions developed. Special Machinery. **E. V. BAILLARD, Fox Bldg., Franklin Square, New York.**

We Invite correspondence with Inventors having Patents to sell or place with manufacturers on a royalty. Amer. Inst. of Inventor's Co., Buffalo, N. Y., U. S. A.

BLACKSMITHS—Send us your address and we will forward, free of charge to any part of the world, a sample copy of The Blacksmith & Wheelwright, the oldest and best paper of its kind. **M. T. RICHARDSON CO., Publishers, New York City, U.S.**

Your Real Estate or Business sold quickly for cash, send price and description. Established 30 years, bank references. Write to-day. **FRANK P. CLEVELAND, Real Estate Expert, 1506 Adams Express Bldg., Chicago.**

20TH CENTURY CUT
RÉMOH DIAMONDS

1 Carat 20th Century Cut Remoh Diamond Ring or Stud, Solid Gold mountings, each **$3.00** or both at **$5.00.** Sent by registered mail upon receipt of price. **THE FINEST IMITATIONS ON EARTH.** Our magnificent catalog fully describing them and explaining how to order, mailed to any address upon request **FREE**

NO AGENTS WANTED.
RÉMOH JEWELRY COMPANY,
834 OLIVE STREET, ST. LOUIS, MO.

We Are Manufacturers of Complete Outfits for

PROSPECTORS, EXPLORERS, CAMPERS, CANOEISTS, FISHERMEN and SPORTSMEN

Whether you camp in the Polar Circles or in the Tropics, we can supply you with a suitable equipment, and give you expert advice on its use.

Our 1903 Catalogue contains 160 illustrated pages of camp necessities, comforts and conveniences. It is worth a quarter, but will be sent free to readers of the SCIENTIFIC AMERICAN sending for same to dept. I.

ABERCROMBIE & FITCH,
314-316 Broadway, New York City.

FERNO GAS HEATER.
Special Price, $1.
Will Heat Your Room at cost ¼ cent per Hour. Absolutely Odorless.
J. BURKE, 3 Ann St., Opp. Astor House.

The Typewriter Exchange

11½ Barclay St., NEW YORK
124 La Salle St., CHICAGO
38 Bromfield St., BOSTON
817 Wyandotte St., KANSAS CITY, MO.
209 North 9th St., ST. LOUIS, MO.
836 California St., SAN FRANCISCO, CAL.

We will save you from 10 to 50% on Typewriters of all makes. *Send for Catalogue*



TYPE WHEELS. MODELS & EXPERIMENTAL WORK. SMALL MACHINERY NOVELTIES & ETC. NEW YORK STENCIL WORKS 100 NASSAU ST. N.Y.

Model Machinery and Experimental Work.
W. H. CRAWFORD, 194 Broadway, New York City.

"THIS BEATS NEW JERSEY."

Charters procured under South Dakota laws for a few dollars. Write for Corporation laws, blanks, by-laws and forms to PHILIP LAWRENCE, late Asst. Sec. of State, Huron, S. Dak. or Room K, 20th floor, 220 B'way, N. Y.

FREE Catalogue of Architectural, Scientific and Technical Books. Prospectus for 1903 for "Architects' and Builders' Magazine," monthly $3 a year. **WM. T. COMSTOCK, Pub., 23 Warren St., New York.**

INVENTIONS DEVELOPED.
WALTER E. FREEMAN, M.E.
Special machinery, electrical and chemical apparatus made on short notice. Good accommodations for inventors. 40 E. 23d St., New York.

Best Inventions Pay only when efficiently handled. Patents developed, built, purchased. FRANCIS GRANGER HALL, JR., 95 Liberty St., N. Y.

GAS ENGINE DETAILS.—A valuable and fully illustrated article on this subject is contained in SUPPLEMENT No. 1292. Price 10 cents. For sale by Munn & Co. and all newsdealers.

PATTERN MAKERS PATTERNS for Castings of all kinds
MODEL AND EXPERIMENTAL WORK
GIBSON & FUCHS, 182 W. Houston St., New York.

ICE MACHINES, Corliss Engines, Brewers' and Bottlers' Machinery. THE VILTER MFG. CO., 899 Clinton Street, Milwaukee Wis.

Are you interested in Patents, Model or Experimental work? Our booklet entitled
WHAT WE DO—HOW WE DO IT
will be sent to you on request.
KNICKERBOCKER MACHINE WORKS, Inc.,
8-10-12 Jones Street, New York.

EXPERT MODEL MAKERS, Models, Patterns, Dies & Novelties. Experimental work. WAGNER MFG. CO., 9 Mohawk St., Chicago, Ill.

MODELS & GEARS UNION MODEL WORKS 191 CLARK CHICAGO

1902 EDITION

All The World's Fighting Ships

By FRED T. JANE, Author of the Naval War Game (Kriegspiel).

Used as a text-book in European navies. The only absolutely correct and complete work of the kind published.

394 PAGES. OVER 3,000 ILLUSTRATIONS.
OBLONG QUARTO. CLOTH. PRICE, $5.00, POST FREE.

CONTAINS—A photograph of every warship in the world; also a silhouette and a gun and armor diagram of each vessel.

CONTAINS—The length, beam, draught, horse power, speed, coal supply, number and size of guns thickness and disposition of armor of every warship in the world.

CONTAINS—Tables of the size, weight, velocity, energy, penetration, etc., of every gun of every navy in the world.

CONTAINS—A series of chapters by noted Admirals, Naval Constructors and other experts of various navies, on vital questions of the day in naval construction, tactics, and strategy.

CONTAINS—A comparative table (by the author) of the strength of the navies of the world—the most scientific attempt yet made to classify the world's warships and navies as to actual fighting strength.

IT SHOULD BE NOTED that this work is from the pen of a naval critic and expert, whose reputation is far-reaching on both sides of the Atlantic. It will be of fascinating interest to those who follow the course of naval development, and as a book of reference should find a place in every library.

MUNN & CO., Publishers, 361 Broadway, New York.

THOROUGH INSPECTIONS

HARTFORD STEAM BOILER INSPECTION AND INSURANCE CO. HARTFORD, CONN.

AND INSURANCE AGAINST LOSS OR DAMAGE TO PROPERTY AND LOSS OF LIFE AND INJURY TO PERSONS CAUSED BY

STEAM BOILER EXPLOSIONS

J. M. ALLEN, PRESIDENT · J. B. PIERCE, SECRETARY · CHAS. M. ATWOOD, TREAS. · W. B. FRANKLIN, VICE PRESIDENT · B. B. ALLEN, 2D VICE PRESIDENT · L. F. MIDDLEBROOK, ASST. SEC'Y

Absolute Confidence

In the ability of the car to answer every demand made upon it is the keynote of perfect enjoyment in automobiling. Ask any man who drives a 1903 model

Winton

whether his car engenders this confidence in his mind. His answer will convince you of Winton superiority.

THE WINTON MOTOR CARRIAGE CO., Cleveland, O.

DIAMOND DETACHABLE TIRES

WE ISSUE every once in a while, a letter, a booklet, a folder or a catalogue, wherein is shown information relating to Automobile Tires, that may be of some value to you.

It costs the price of a postal card to have your name added to our mailing list.

THE DIAMOND RUBBER CO., Akron, Ohio.

SHOE BLACKING.—FORMULAS FOR liquid and solid blacking are given in SUPPLEMENT Nos. 1313 and 1339. Price 10 cents each. For sale by Munn & Co. and all newsdealers

The Test

of Service

always proves the absolute supremacy of the

Remington

Typewriter

Remington Typewriter Company

327 Broadway, New York

Scales All varieties at lowest prices. Best Railroad Track and Wagon or Stock Scales made. Also 1000 useful articles, including Safes, Sewing Machines, Bicycles, Tools, etc. Save Money. Lists Free. CHICAGO SCALE CO., Chicago, Ill

MAGIC LANTERNS

STEREOPTICONS and VIEWS

for Public Exhibitions, Church Entertainments, for illustrating sermons. Many sizes, all prices. Chance for men with little capital to make money. 260 page catalogue free.

McALLISTER, Mfg. Optician, 49 Nassau Street, N. Y.

SIGNALING THROUGH SPACE without wires.—An article by W. Preece, describing the new Marconi system of telegraphing without wires. 6 illustrations. SCIENTIFIC AMERICAN SUPPLEMENT 1124. Price 10 cents. For sale by Munn & Co. and all newsdealers.

RIVETT LATHE

No up-to-date manufacturer can afford to do without it.

HIGHEST AWARD wherever exhibited. Send for Catalog. 23

Fanciil Watch Tool Company.

BRIGHTON, BOSTON, MASS., U. S. A.

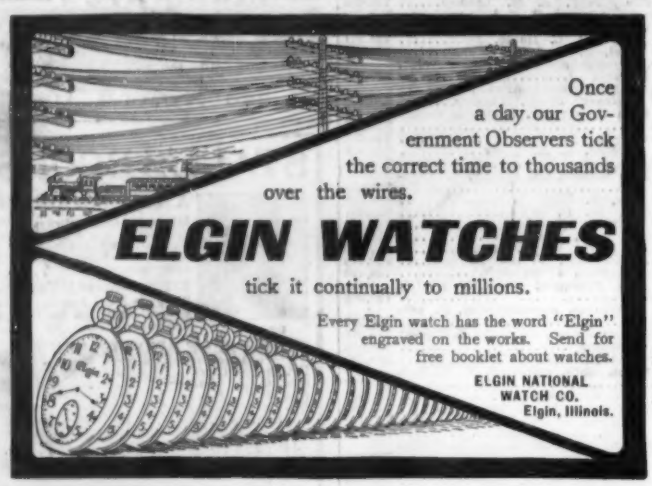

Once a day our Government Observers tick the correct time to thousands over the wires.

ELGIN WATCHES

tick it continually to millions.

Every Elgin watch has the word "Elgin" engraved on the works. Send for free booklet about watches.

ELGIN NATIONAL WATCH CO. Elgin, Illinois.

TYPEWRITERS ALL MAKES

All the Standard machines SOLD or RENTED ANYWHERE at HALF MANUFACTURERS' PRICES. Shipped with privilege of examination. Send for Cat.

Typewriter Emporium 205 LaSalle St., Chicago

A New Booklet on TIRES

FREE Write For It

FISK RUBBER CO. Chicopee Falls, Mass.

ALL ARITHMETICAL PROBLEMS solved rapidly and accurately by the Comptometer. Saves 50 per cent of time and entirely relieves mental and nervous strain. Adapted to all commercial and scientific computation. Why don't you get one? *Write for pamphlet.*

FELT & TARRANT MFG. CO. 52-56 ILLINOIS ST. CHICAGO.

PARALLEL CLAMPS CHESLY & Co ALL ANGLES ALL SIDES Chicago U.S.A.

PALATABLE WATER-STILL

Produces an absolutely pure and aerated water for manufacturing or drinking purposes.

Attachable to any steam boiler.

Made in all sizes, from 10 to 500 gallons distilled water per hour.

In use in U. S. Army and Hospital Marine service.

Write for catalogue.

PALATABLE WATER-STILL COMPANY, Boston, Mass., U. S. A.

Watchman's Register with Time Lock

Sanford's Improved Register is the best in the world. Information and prices on application to

C. E. SANFORD, 18 Broadway, New York. Inventor, Proprietor and Sole Manufacturer.

FREE SPECIAL OFFER No. 1. to the Readers of the Scientific American. Good for 30 days.

A Beautiful Imported China Tea Set (56 pieces), or Toilet Set, Parlor Lamp, Clock, Watch, and many other articles too numerous to mention. FREE with club order of 20 lbs. of our New Crop Tea, 60c. a lb., or 20 lbs. of Great American Baking Powder, 45c. a lb. Mention of SCIENTIFIC AMERICAN and number (No. 1) must accompany order by mail or at store.

THE GREAT AMERICAN TEA CO., P. O. Box 289. 31 and 33 Vesey St., New York.

Take the Short Cut



GO RIGHT TO CARRIAGE HEADQUARTERS

Write to-day for our illustrated catalogue (free) which describes our goods truthfully, explains our method and our guarantee and makes it safe, simple and easy for you to get carriages, harness and horse accessories direct from our factory at wholesale prices.

THE COLUMBUS CARRIAGE and HARNESS COMPANY.

Factory and General Office, Columbus, O. Western Office & Distributing House, St. Louis, Mo.

Write to nearest office.

CHARTER ENGINE

USED ANY PLACE BY ANY ONE FOR ANY PURPOSE

Stationaries, Portables, Sawing Outfits, Hoisters, Engines and Pumps.

FUEL—Gasoline, Gas, Distillate.

Send for Illustrated Catalogue and Testimonials, and State Your Power Needs.

CHARTER GAS ENGINE CO., Box 140, STERLING, ILL



We manufacture gears and bodies suitable for all purposes. We also sell supplies and can furnish any part or all the parts for a gasoline or steam rig. See our late catalogue, FREE.

NEUSTADT-PERRY CO., 826-830 S. 18th St., St. Louis, Mo.

CHAS. T. HOPE & Co., 81 Hudson St., New York, Export Agents.

Beauty and Utility

Every business man knows the annoyance of loose shirt cuffs. Every wise business man ought to know that they can be easily fixed and regulated to any desired length below the coat sleeve by using

Washburne's Cuff Holders

They can be instantly attached or detached. They never come loose—have a grip like a bulldog. Illustrated catalogue on request.

Sample pair of Cuff Holders sent by mail on receipt of 20c.

AMERICAN RING CO., Box 8. Waterbury, Conn.

NEW ENGLAND WATCHES The PADISHAH

The best low priced watch in the world. Sold in every country on the globe for the one price or its equivalent. . . . .

$2.00 EACH

Plain or fancy colored Sporting Dials.

We make all styles and sizes of watches for men and women. . . . . Catalogues sent on request.

NEW ENGLAND WATCH CO., Factories: Waterbury, Conn.

Offices: New York, 37 & 39 Maiden Lane. Chicago, 131 to 137 Wabash Avenue. San Francisco, Spreckels Building.

Orient Motor Car

8 H. P. PRICE $950

All speeds to 30 miles per hour. Will climb any grade. Write for descriptive catalogues.

WALTHAM MFG. CO., - Waltham, Mass.

I will Ship to any Station in the United States for

THE CELEBRATED

WILLARD STEEL RANGE $25.00

It has six 8-inch lids; 15-gallon reservoir; large warming closet; oven 21 ins. deep, 17 ins. wide, 12 ins. high; top cooking surface, 40x26 ins.; lined throughout with Asbestos; Duplex grate; burns wood or coal. Guaranteed in every respect; weighs 400 lbs. Write for free descriptive circular and testimonials.

AGENTS WANTED.

WM. G. WILLARD, Dept. 112, 619-21 N. 4th Street, St. Louis, Mo.

COLD GALVANIZING. AMERICAN PROCESS. NO ROYALTIES. SAMPLES AND INFORMATION ON APPLICATION

NICKEL AND Electro-Plating Apparatus and Material. THE Hanson & Van Winkle Co., Newark, N. J. 136 Liberty St., N. Y. 30 & 32 S. Canal St. Chicago.

SEND YOUR BUSINESS CARD FOR CATALOGUE.

Free Test "Royal Worcester" Belting.

We are so confident that this is absolutely the best and most economical power belt to use that we will gladly send trial belt for testing on your own machinery. All you have to do is write us for it, and you are under no obligation to keep it unless it's absolutely satisfactory in every respect.

Write us to-day for belting facts. We have been making old-fashioned oak-tanned leather belting for 50 years, and want you to know how it wears. It will be money in your pocket.

GRATON & KNIGHT MFG. CO.

Oak Leather Belt Makers, Worcester, Mass.

The Old Way in Turkey.

COMFORT, EASE, and LUXURY

with strength, speed, and stability, make the ideal motor-carriage. For practical, every-day service, at the minimum of expense, on all roads, in all kinds of weather, there are no motor-vehicles made that excel

Rambler Touring Cars

The unusual margin of safety in every component part has enabled them to stand every conceivable test with credit. Made from best quality materials, by skilled and experienced workmen, they afford the highest efficiency at the lowest cost consistent with absolute reliability.

Complete Illustrated Catalogue describing in detail many points of manifest superiority, mailed free on request. Model E (like cut) $750.00

THOMAS B. JEFFERY & CO., KENOSHA, WIS.

BABBITT METALS.—SIX IMPORTANT formulas. SCIENTIFIC AMERICAN SUPPLEMENT 1123. Price 10 cents. For sale by Munn & Co. and all newsdealers. Send for catalogue.



The why some shopkeepers do not sell PRESIDENT SUSPENDERS is they make more money on imitations. Fifty cents and a dollar Ask at favorite shop, or post prepaid from C. A. Edgarton Mfg. Co. Box 222-I, Shirley, Mass.

Send 6 cents for catalogue.

PRACTICAL Compend of Electricity

ALL ITS BRANCHES AND APPLICATIONS DESCRIBED IN PLAIN AND PRACTICAL LANGUAGE

Wireless Telegraphy, Magnetism, Batteries, Dynamos, Motors, Electric Railways, Plating, Telephone, Telegraph, Welding, Lighting, X-Rays, Wiring, Vocabulary of Technical Terms. Complete self-instructor. Handy size for carrying easily in pocket, making a convenient reference guide or manual. 116 illustrations. Size, 5¼x2¼ ins. 272 pages. Cloth, 25c. Leather, 50c. Live Agents Wanted.

LAIRD & LEE, 265 Wabash Ave., CHICAGO

JESSOP STEEL Co. MFRS OF CRUCIBLE SHEET STEEL WASHINGTON, PA.